



# Can be installed anywhere Small photoelectric sensor

- | Features a high speed response time of 0.5 ms, enabling its use on high speed production lines
- | Small in size with noise resistance that conforms to CE standards
- | Shock resistance up to 100 G


**BGS-S03 Style (10 to 50mm) is discontinued**

Related products	Transparent object detection <b>SR-Q</b> ● P.412		BGS type <b>BGS-S</b> ● P.342	


Overlap detection of empty ice cream cups




Detection of parts on parts feeder

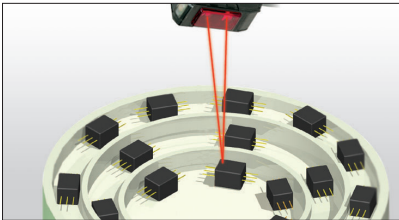

Detection of rice dropped from automatic sushi wrap rolling machine

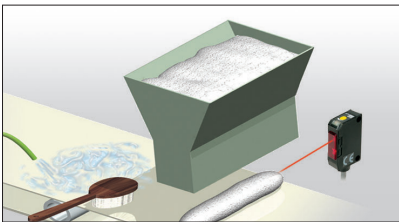

Detection of items transported on a rolling conveyor

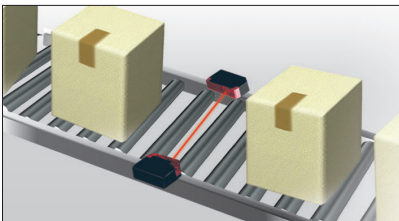

## Selection table

Type	Shape	Sensing distance	Model (Models in parentheses are connector types)	
			NPN type	PNP type
Through-beam		4 m	<b>ST-400N</b> (ST-400CN)	<b>ST-400P</b> (ST-400CP)
Retro-reflective		0.02 to 1.5 m	<b>SR-150N</b> (SR-150CN)	<b>SR-150P</b> (SR-150CP)
Diffuse-reflective		200 mm	<b>SD-20N</b> (SD-20CN)	<b>SD-20P</b> (SD-20CP)
Transparent object detection		10 to 300 mm	<b>SR-Q50NW</b> (SR-Q50CNW) ● P.412	<b>SR-Q50PW</b> (SR-Q50CPW) ● P.412
BGS		<del>10 to 50 mm (10 to 30 mm)</del>	<del><b>BGS-S03N</b></del> <del>● P.342</del>	<del><b>BGS-S03P</b></del> <del>● P.342</del>
		10 to 80 mm (10 to 80 mm)	<b>BGS-S08N</b> (BGS-S08CN) ● P.342	<b>BGS-S08P</b> (BGS-S08CP) ● P.342

● For the connector type, please purchase an optional JCN series connector cable.


**Features a high speed response time of 0.5 ms, enabling its use on high speed production lines**

With a response time of 0.5 ms, this photoelectric sensor with built-in amplifier features a top level response time. This feature makes its use on high speed production lines possible.



**Small in size with noise resistance that conforms to CE standards**

In addition to being small in size, it has cleared strict CE inspection standards for EU noise resistance performance. It can be used for a wide range of machine equipment.



**Small sensor with built-in amplifier**

The main unit features a compact design of 10 × 17.4 × 28 mm. This compact size was realized without sacrificing any specifications, such as those regarding sensing distance.



**Can be used globally as it conforms to the strict standard of each country.**

S series is conforms to CE, UL and VDE standards and has cleared severe testing standards of various countries worldwide. This series can be used in any region of the world.

**Shock resistance of 100 G with robust structure**

Features a shock resistance of 100 G (approx. twice that of conventional products) for protection in the event that workpieces come in contact or impact with sensors. It can be used without having to worry about performance deterioration.



**Applicable to VDE safety standards**

Features a safe design in which the main unit will not catch fire even if sensor troubles (short-circuits/ overvoltage/etc.) occur. S series models conform to VDE standards.



Photoelectric Sensors

Specialized Photoelectric Sensors

Laser Displacement Sensors

Sensors with Built-in Amplifier

Z3

Z-M

Z2

E

J

K

**S**

S2

C-R

C2

PLN

Specifications

Type		Through-beam type	Retro-reflective type	Diffuse-reflective type	
Model	NPN	Cable type	<b>ST-400N</b>	<b>SR-150N</b>	<b>SD-20N</b>
		Connector type	<b>ST-400CN</b>	<b>SR-150CN</b>	<b>SD-20CN</b>
	PNP	Cable type	<b>ST-400P</b>	<b>SR-150P</b>	<b>SD-20P</b>
		Connector type	<b>ST-400CP</b>	<b>SR-150CP</b>	<b>SD-20CP</b>
Sensing distance		4 m	0.02 to 1.5 m <sup>*1</sup>	200 mm <sup>*2</sup>	
Light source		Red LED			
Smallest detectable object		ø6 mm	□ 45 mm	—	
Response time		0.5 ms or less			
Hysteresis		—	—	20% or less	
Distance adjustment		1-turn potentiometer			
Indicators		Output indicator (orange), Stability indicator (green)			
Control output		NPN/PNP type Open co-llector Max. 100 mA/30 VDC			
Output mode		Light ON / Dark ON Switched by wiring			
Connection type		Cable type: Cable length: 2 m ø3.5 mm / Connector type: M8, 4-pin			
Insulation resistance		20 MΩ or more (with 500 VDC)			
Rating	Supply voltage		10 to 30 VDC, including 10% ripple (p-p)		
	Current consumption		30 mA or less	20 mA or less	
Applicable regulations		EMC directive (2004/108/EC)			
Applicable standards		EN 60947-5-2			
Company standards		Noise resistance: Feilen Level 3 cleared			
Environmental resistance	Ambient temperature/humidity		-25 to +55°C (no freezing) / 35 to 85% RH (no condensation)		
	Ambient illuminance		Sunlight: 10,000 lx or less Incandescent lamp: 3,000 lx or less		
	Vibration resistance		10 to 55 Hz; double amplitude 1.5 mm; 2 hours in each of the X, Y, and Z directions		
	Shock resistance		Approx. 100 G (1000 m/s <sup>2</sup> ); 3 times in each of the X, Y, and Z directions		
	Degree of protection		IEC standard, IP67		
Material		Housing: PSF + PBT (glass fiber filled), Front cover: Polycarbonate (retro-reflective type is PMMA)			
Weight without cable		Approx. 5 g			
Included accessories		Mounting bracket: BEF-W150-B	Mounting bracket: BEF-W150-B Reflector: V-61	Mounting bracket: BEF-W150-B	

\*1. With V-61 reflector, \*2. With 100 × 100 mm white paper

● Specifications are subject to change without prior notice for product improvement purposes.

Options/Accessories

Reflector

Standard (included)  
Included with retro-reflective type  
**V-61**  
Sensing distance:  
1.5 m  
60.9 × 50.9 mm



Small type  
**V-42**  
Sensing distance:  
800 mm  
42 × 35 mm



Vertical type  
**P45A**  
Sensing distance:  
500 mm  
54 × 12.4 mm



Reflective sheet

**Diamond grade sheet**  
Sensing distance:  
50 to 600 mm  
100 × 100 mm (adhesive type)



Protective mounting bracket

- Ultra-durable 2 mm thick type
- Rust-resistant stainless steel
- Sensor is firmly secured using M3 Hex socket head cap screws
- The bracket is also firmly secured using M6 screw

LS series

LS-S01




LS-S02



Slit mask

Slit mask for through-beam type  
**BL-150-10**  
Slit width 1 mm  
(2 included)



Sensor stand


Sensor stand (Image is for flat surface mounting)  
**PLN-1**  
For PLN-1  
Reflector mounting bracket  
**PLN-1M**  
PLN description  
● P.242



## Distance adjustment

Diffuse type	Order	Diagram	Potentiometer	Output indicator (orange)	Adjustment procedure
	1				Set the object for detection in the detection position and gradually raise the sensitivity adjustment potentiometer from the minimum to position A where the indicator will light up.
	2				Remove the object for detection and gradually lower the sensitivity adjustment potentiometer from the maximum to position B where the indicator will go out.
3				<b>Position C between positions A and B</b> is the optimal position for sensitivity. Positions A and B may be reversed depending on the model and the detection conditions. Place the workpiece in a fixed position and perform an operational check.	


## Operation mode

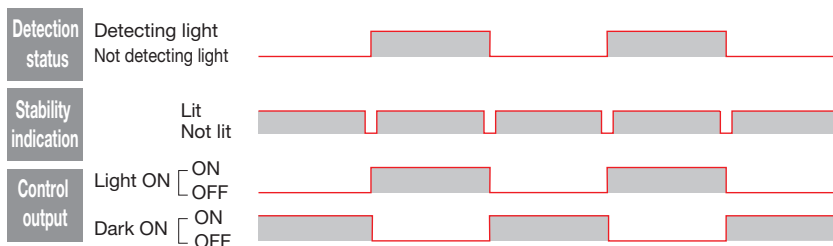


\*The operation mode is the same for NPN output and PNP output.

I/O circuit diagram


■ NPN output type

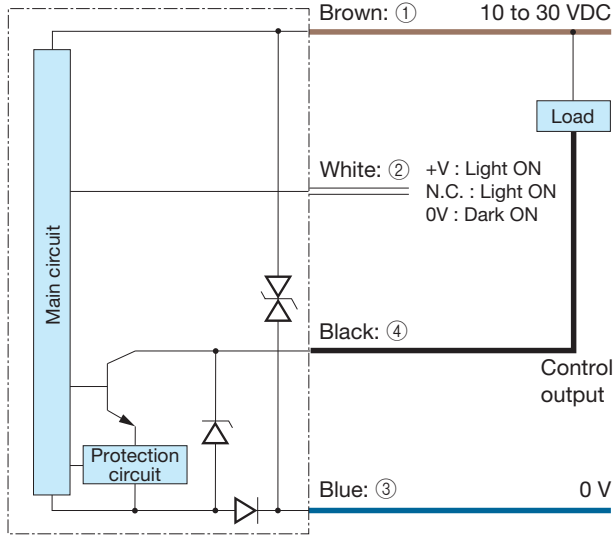

■ PNP output type

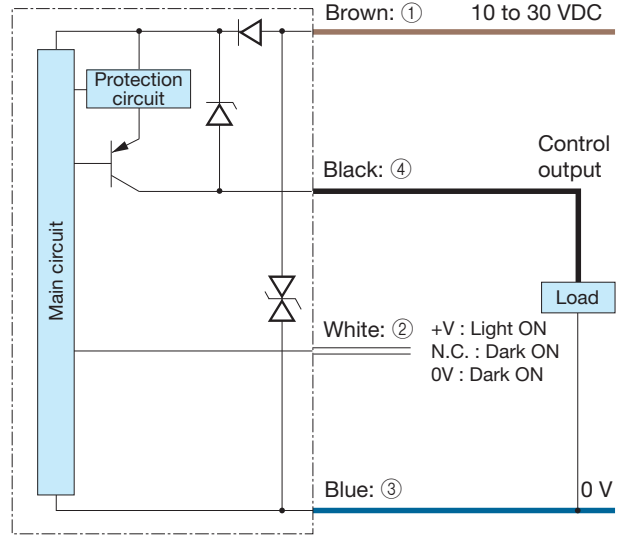


■ Through-beam type emitter

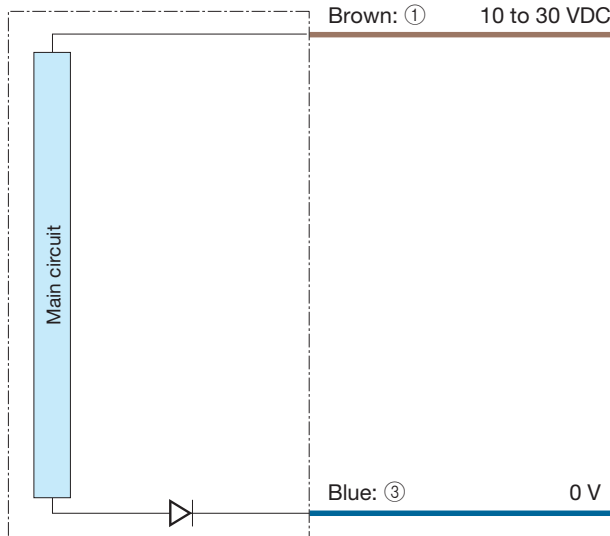

■ Connector type

(Pin configuration)


Sensor side Connector cable side



- ① 10 to 30 VDC
- ② +V: Light ON  
N.C.: (NPN)Light ON  
(PNP)Dark ON
- ③ 0 V
- ④ Control output

Notes

- When using a switching regulator for the power supply, be sure to ground the frame ground terminal.
- Because wiring sensor wires with high-voltage wires or power supply wires can result in malfunctions due to noise, which can cause damage, make sure to wire separately.
- Avoid using the transient state while the power is on (approx. 100 ms).
- The connector direction is fixed as the drawing below when you use L-shaped connector cable. Be aware that rotation is not possible.




## Dimensions


### Sensor

(Unit: mm)

#### ■ Cable type

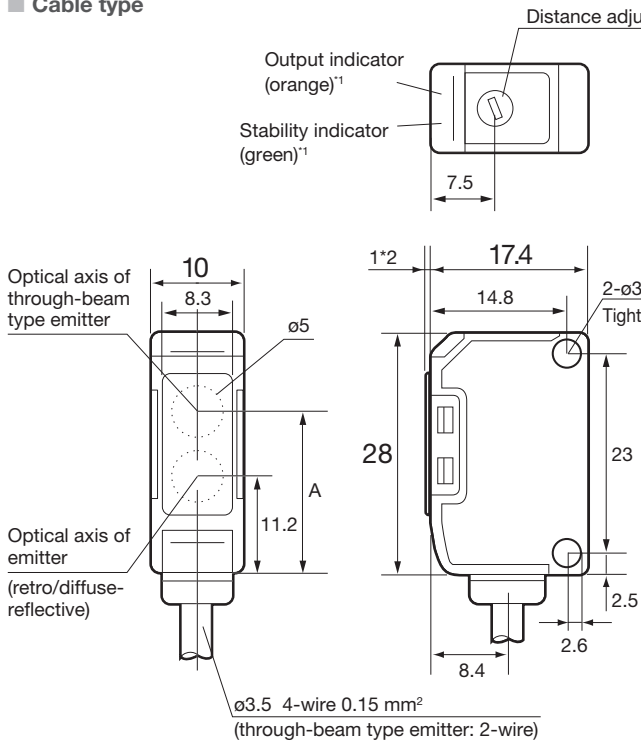

#### ■ Connector type

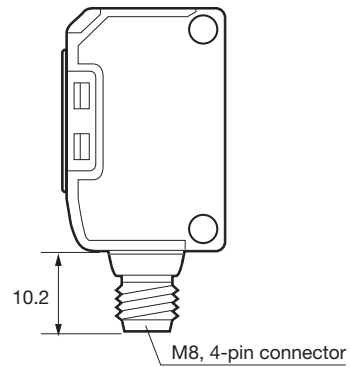


\*1 Not applicable for through-beam type emitter


\*2 Through-beam type emitter only

### Mounting bracket


#### ■ BEF-W150-B (included with sensor)

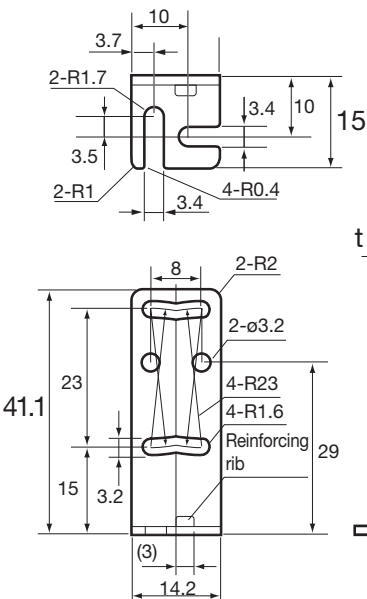

#### ■ BEF-W150-A (optional)

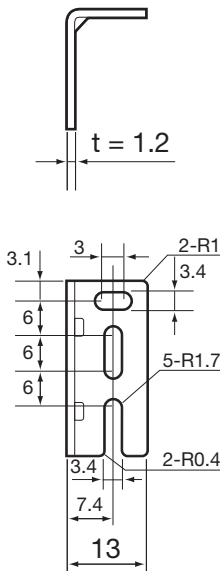

#### ■ Nut plate (included)






**Dimensions**

**Connector cable (optional)**

(Unit: mm)

■ JCN-S, JCN-5S, JCN-10S

■ JCN-L, JCN-5L, JCN-10L




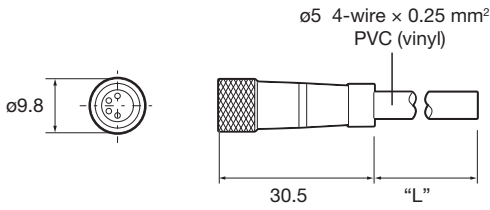


**Reflector**

■ V-61: Standard type reflector (included with retro-reflective type)

■ V-42: Small reflector (optional)



■ P45A: Vertical type reflector (optional)

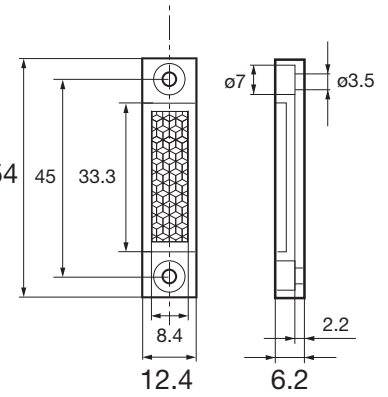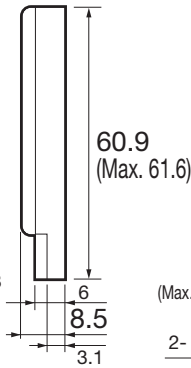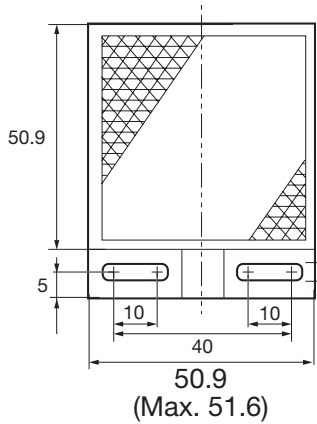

**Protective mounting bracket**

■ LS-S01


■ LS-S02

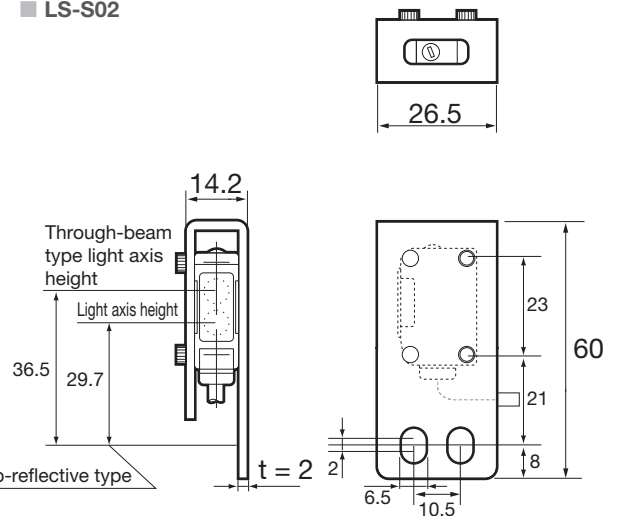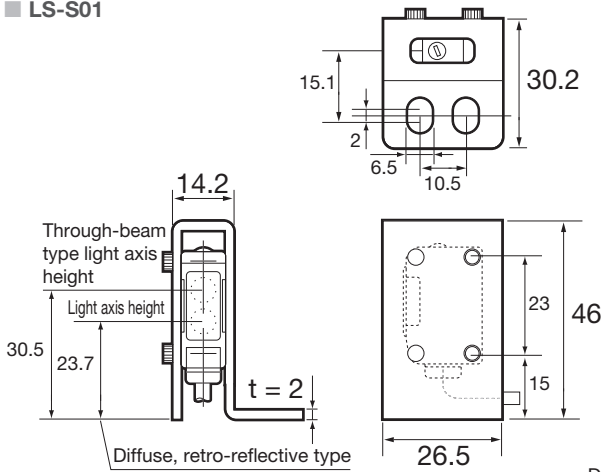


Typical characteristic data

\*Contact us for any other characteristic data that may be required.


ST-400

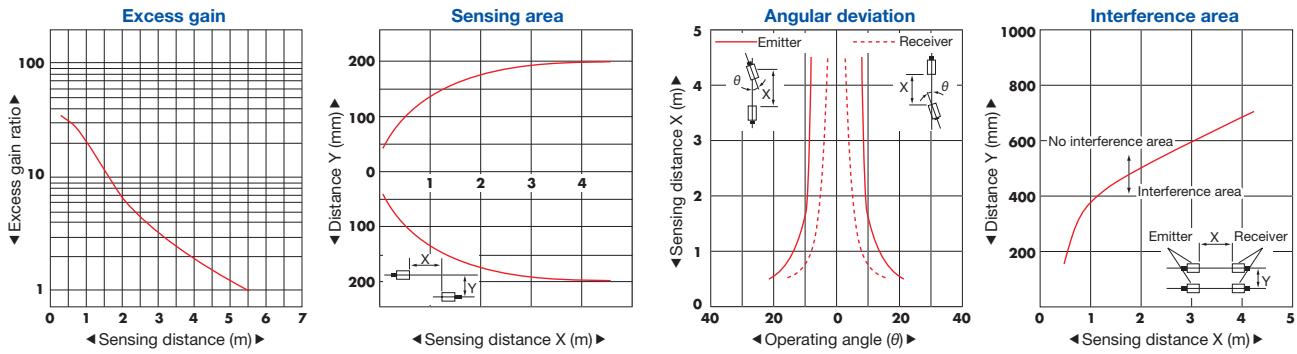


When slit mask (BL-150-10) is attached ST-400

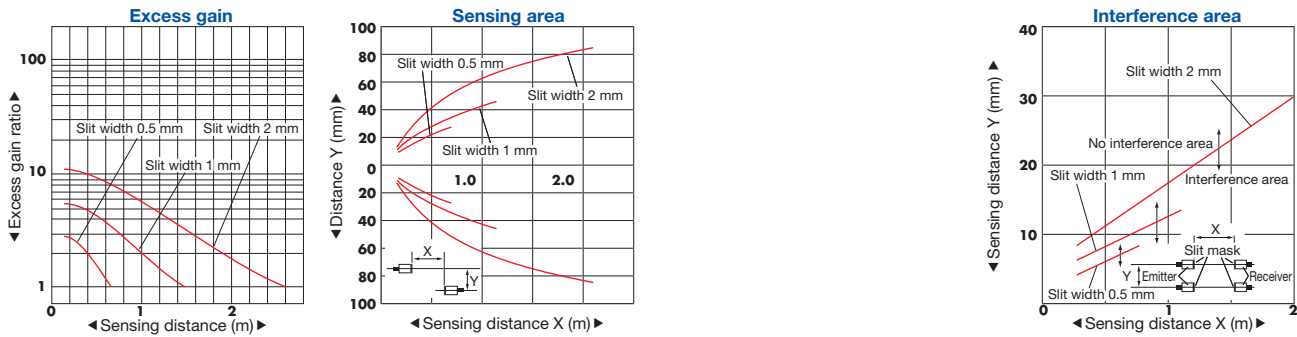

SR-150

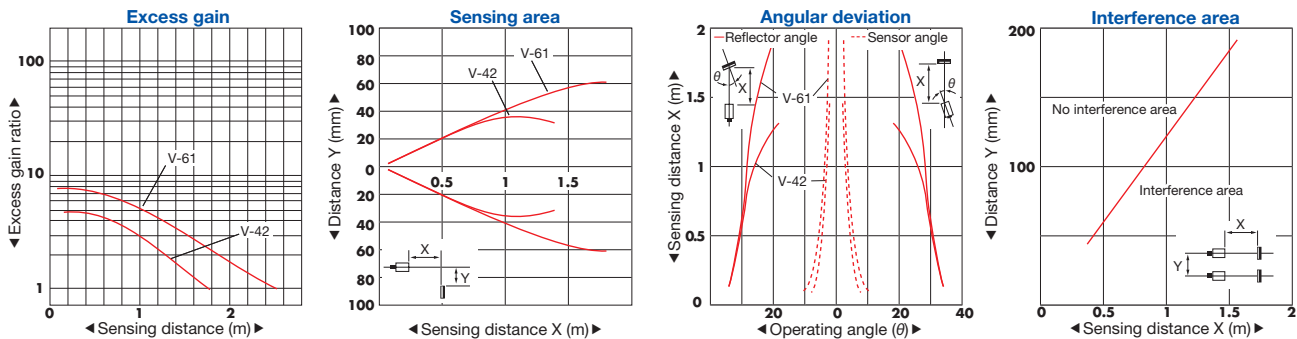

SD-20

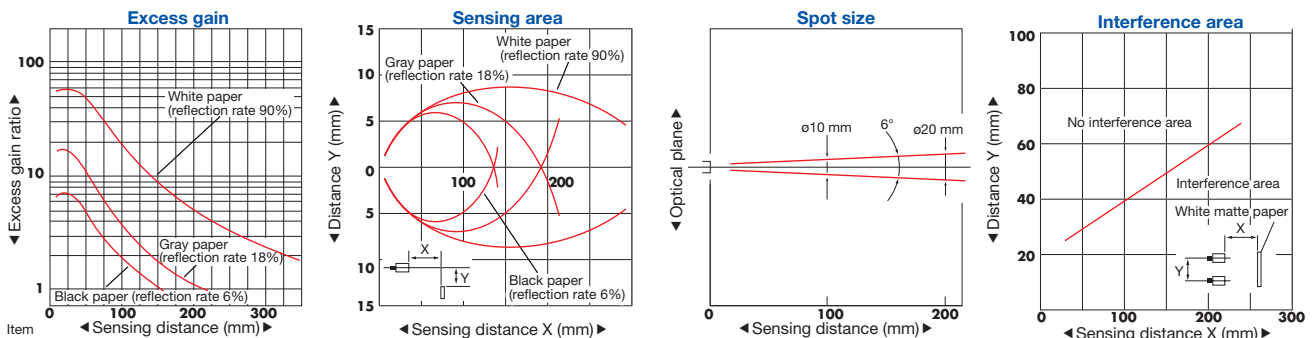

Item targeted for detection 100 x 100 mm