

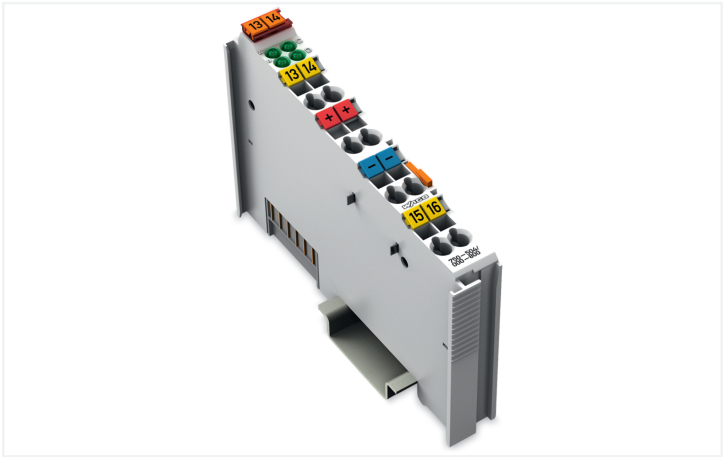
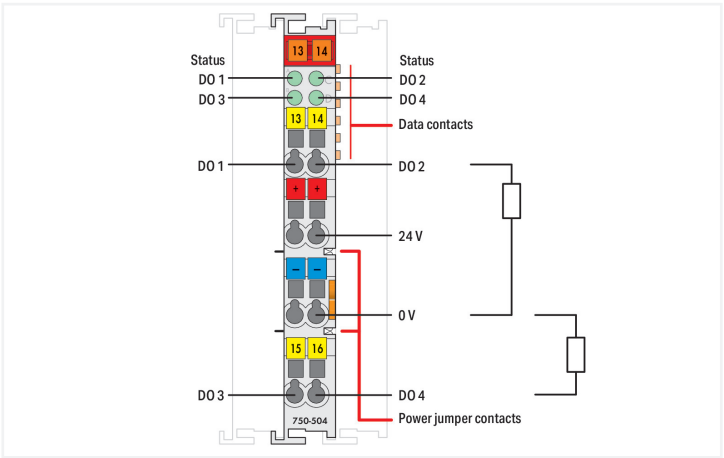


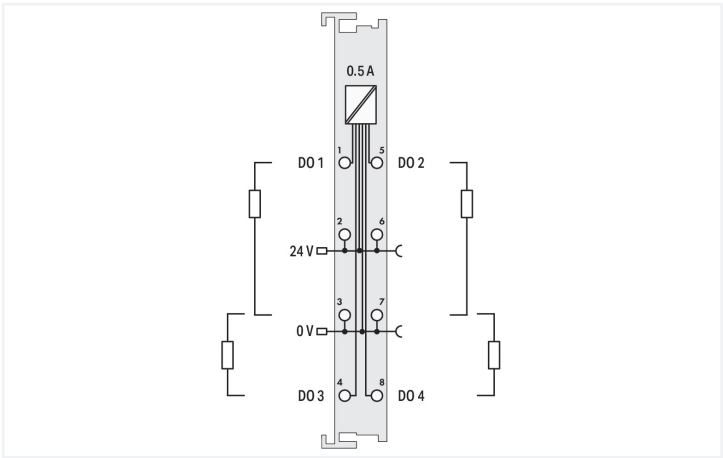

Color: ■ light gray

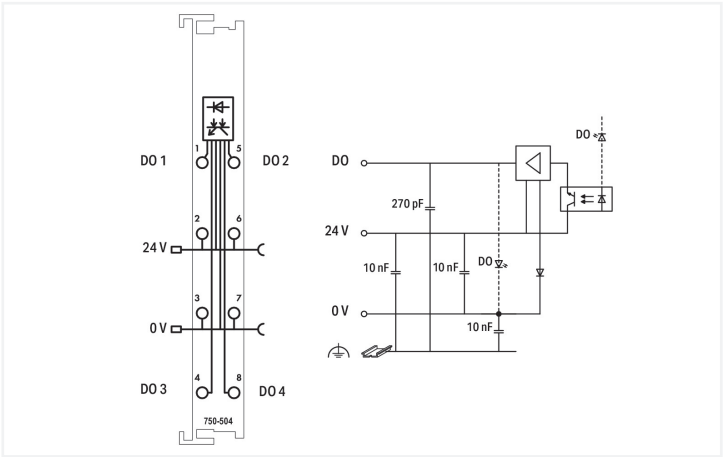

This digital output module transmits control signals from the automation device to the connected actuators.
All outputs are short-circuit-protected.
Field and system levels are electrically isolated.

Technical data	
Number of digital outputs	4
Total number of channels (module)	4
Signal type	Digital
Signal type (voltage)	24 VDC
Actuator connection	2 x (2-wire, 3-wire); A suitable field side connection module (e.g., 750-614) must also be used to connect other actuators.
Output characteristic	high-side switching
Output current per channel	0.5 A
Output current	short-circuit-protected
Load type	Resistive, inductive, lamp load
Switching frequency (max.)	1 kHz
Inductive load switch-off energy dissipation (max.)	0.3 J
Output data width (internal) max.	4 bits
Supply voltage (system)	5 VDC; via data contacts
Current consumption (5 V system supply)	10 mA
Supply voltage (field)	24 VDC (-25 ... +30 %); via power jumper contacts (power supply via blade contact; transmission (field side supply voltage only) via spring contact)
Current consumption, field supply (module with no external load)	30 mA
Isolation	500 V system/field
Interference-free with safety function	Yes



Technical data		
Indicators		LED (A-D) green: Status DO 1 ... DO 4
Number of incoming power jumper contacts		2
Number of outgoing power jumper contacts		2
Current carrying capacity (power jumper contacts)		10 A

Connection data		
Connection technology: I/O		8 x CAGE CLAMP® (outputs)
Connectable conductor materials		Copper
Connection type		Output
Solid conductor		0.08 ... 2.5 mm² / 28 ... 14 AWG
Fine-stranded conductor		0.08 ... 2.5 mm² / 28 ... 14 AWG
Strip length		8 ... 9 mm / 0.31 ... 0.35 inches

Physical data		
Width		12 mm / 0.472 inches
Height		100 mm / 3.937 inches
Depth		69.8 mm / 2.748 inches
Depth from upper-edge of DIN-rail		62.6 mm / 2.465 inches

Mechanical data		
Mounting type		DIN-35 rail
Pluggable connector		fixed

Material data		
Color		light gray
Housing material		Polycarbonate; polyamide 6.6
Fire load		1.271 MJ
Weight		48.4 g
Conformity marking		CE

Environmental requirements		
Ambient temperature (operation)		0 ... +55 °C
Ambient temperature (storage)		-40 ... +85 °C
Protection type		IP20
Pollution degree		2 per IEC 61131-2
Operating altitude		0 ... 2000 m / 0 ... 6562 ft
Mounting position		Horizontal left, horizontal right, horizontal top, horizontal bottom, vertical top and vertical bottom
Relative humidity (without condensation)		95 %
Vibration resistance		4g per IEC 60068-2-6
Shock resistance		15g per IEC 60068-2-27
EMC immunity to interference		per EN 61000-6-2, marine applications
EMC emission of interference		per EN 61000-6-4, marine applications
Exposure to pollutants		per IEC 60068-2-42 and IEC 60068-2-43
Permissible H ₂ S contaminant concentration at a relative humidity 75 %		10 ppm
Permissible SO ₂ contaminant concentration at a relative humidity 75 %		25 ppm



Commercial data	
Product Group	15 (I/O System)
PU (SPU)	1 pcs
Packaging type	Box
Country of origin	DE
GTIN	4045454870454
Customs tariff number	85371098990

Product Classification	
UNSPSC	32151705
eCl@ss 10.0	27-24-26-04
eCl@ss 9.0	27-24-26-04
ETIM 9.0	EC001599
ETIM 8.0	EC001599
ECCN	NO US CLASSIFICATION

Environmental Product Compliance	
CAS-No.	1303-86-2 1317-36-8 25550-51-0 7439-92-1 75980-60-8
REACH Candidate List Substance	4-Methyl-1,2-cyclohexanedicarboxylic anhydride Diboron trioxide Lead Lead monoxide Phosphine oxide, diphenyl(2,4,6-trimethylbenzoyl)-
RoHS Compliance Status	Compliant,With Exemption
RoHS Exemption	6(c) 7(a) 7(c)-I 7(c)-II
SCIP notification number (Austria)	a08770db-21c0-4bed-82e3-a40a37701efe
SCIP notification number (Belgium)	2a2ec452-cc3f-49ce-8ca0-11b7edf42f97
SCIP notification number (Bulgaria)	969a7672-d542-4fa8-95ec-0e32d51b6423
SCIP notification number (Czech Republic)	b305b855-7e2f-41f6-9460-0e05ef57fae2
SCIP notification number (Denmark)	18d9e0e9-e462-473b-8f52-707b340188c2
SCIP notification number (Finland)	509a241c-88bf-4a76-a6f0-2cf96fb4c3ca
SCIP notification number (France)	90548fcf-83c9-4ca3-8f23-4c10d1474699
SCIP notification number (Germany)	68fbe5f8-499e-41df-b1d5-f08d33e1bd15
SCIP notification number (Hungary)	3439fe27-dc80-4a79-b80a-c9fa8e8368d0
SCIP notification number (Italy)	4c0ce7f4-3c92-49f6-a01f-29e1b1d56f96
SCIP notification number (Netherlands)	4bcd8229-9d22-4699-a7f5-9a41d446b54b
SCIP notification number (Poland)	fe35663e-1a68-429a-a2db-dd301fb349f8
SCIP notification number (Romania)	89287865-d1c4-4a1a-8aa6-d3e3fad02e5b
SCIP notification number (Sweden)	a32ed2de-e817-45e3-9be7-8383b0a0fb80



Approvals / Certificates

General approvals



Approval	Standard	Certificate Name
EAC GZO Almaty Standart	TP TC 020/2011	EAC CoC 03083
KC National Radio Research Agency	Article 58-2, Clause 3	MSIP-REM-W43-DOM750
UL Underwriters Laboratories Inc. (ORDINARY LOCATIONS)	UL 508	E175199

Declarations of conformity and manufacturer's declarations

Approval	Standard	Certificate Name
EU-Declaration of Conformity WAGO GmbH & Co. KG	-	-
UK-Declaration of Conformity WAGO GmbH & Co. KG	-	-

Approvals for marine applications



Approval	Standard	Certificate Name
ABS American Bureau of Shipping	-	22-2219060
BSH Bundesamt fuer Seeschifffahrt und Hydrographie	-	1104
BV Bureau Veritas S.A.	-	30389/C0 BV
DNV DNV GL SE	DNV-CG-0339, Aug. 2021	TAA0000194
KR Korean Register of Shipping	-	KR HMB05880-AC001
LR Lloyds Register EMEA	-	LR22180952TA
PRS Polski Rejestr Statków	-	TE/1101/880590/23
RINA RINA Germany GmbH	-	ELE343521XG001

Approvals for hazardous areas



Approval	Standard	Certificate Name
ATEX TUEV Nord Cert GmbH	EN 60079-0	TUEV14ATEX148929X (II 3 G Ex ec IIC T4 Gc)
CCCEX CQST/CNEX	CNCA-C23-01	2020312310000213 (Ex ec IIC T4 Gc)
INMETRO TÜV Rheinland do Brasil Ltda.	IEC 60079-0	TÜV 12.1297 X
UKEX WAGO GmbH & Co. KG	EN 60079-0	UKCA_WA GO22UKEX003X_ec
UL Underwriters Laboratories Inc. (HAZARDOUS LOCATIONS)	UL 121201	E198726

Downloads

Environmental Product Compliance

Compliance Search
Environmental Product Compliance 750-504/000-800





Documentation				
Manual				
Product Manual 4-channel, 24VDC, 0.5A	2492330635 3 en-US 2025-07-01 13:09 07.10.2025	pdf	1009.84 KB	
System Manual Series 750/753				
System Description				
750/753 Series I/O-System – General Product Information		pdf	953.35 KB	
Overview on WAGO-I/O-SYSTEM 750 approvals		pdf	770.48 KB	
Bid Text				
750-504/000-800	19.02.2019	xml	4.20 KB	
Instruction Leaflet				
CCC Ex (Additional information)	26.04.2023	pdf	159.76 KB	
CAD/CAE-Data				
CAD data		CAE data		
2D/3D Models 750-504/000-800				
		EPLAN Data Portal 750-504/000-800		
		WSCAD Universe 750-504/000-800		
		ZUKEN Portal 750-504/000-800		
Device Files				
Device Driver				
WAGO USB Service Kabel Treiber / Serie 750 und 857	6.5.3.0 10.09.2014	zip	4721.96 KB	
1 Compatible Products				
1.1 Optional Accessories				
1.1.1 DIN-rail				
1.1.1.1 Mounting accessories				
				
				
				
				
				
				
				
				
				
				
				
				
				
				
				
				

Item No.: 210-196 Aluminum carrier rail; 35 x 8.2 mm; 1.6 mm thick; 2 m long; unslotted; similar to EN 60715; silver-colored	Item No.: 210-198 Copper carrier rail; 35 x 15 mm; 2.3 mm thick; 2 m long; unslotted; according to EN 60715; copper-colored	Item No.: 210-508 Steel carrier rail; 35 x 15 mm; 1.5 mm thick; 2 m long; slotted; galvanized; similar to EN 60715; silver-colored	Item No.: 210-197 Steel carrier rail; 35 x 15 mm; 1.5 mm thick; 2 m long; slotted; similar to EN 60715; silver-colored
Item No.: 210-506 Steel carrier rail; 35 x 15 mm; 1.5 mm thick; 2 m long; unslotted; galvanized; similar to EN 60715; silver-colored	Item No.: 210-114 Steel carrier rail; 35 x 15 mm; 1.5 mm thick; 2 m long; unslotted; similar to EN 60715; silver-colored	Item No.: 210-118 Steel carrier rail; 35 x 15 mm; 2.3 mm thick; 2 m long; unslotted; according to EN 60715; silver-colored	Item No.: 210-115 Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; slotted; according to EN 60715; "Hole width 18 mm; silver-colored
Item No.: 210-112 Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; slotted; according to EN 60715; "Hole width 25 mm; silver-colored	Item No.: 210-504 Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; slotted; galvanized; according to EN 60715; silver-colored	Item No.: 210-113 Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; unslotted; according to EN 60715; silver-colored	Item No.: 210-505 Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; unslotted; galvanized; according to EN 60715; silver-colored



1.1.2 Marking

1.1.2.1 Group marker carrier



[Item No.: 750-106](#)
Group marker carrier

1.1.2.2 Marker



[Item No.: 750-100](#)
Marker card; as a DIN A4 sheet; plain



[Item No.: 2009-145/000-006](#)
Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; blue



[Item No.: 2009-145/000-007](#)
Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; gray



[Item No.: 2009-145/000-023](#)
Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; green



[Item No.: 2009-145/000-012](#)
Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; orange



[Item No.: 2009-145/000-005](#)
Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; red



[Item No.: 2009-145/000-024](#)
Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; violet



[Item No.: 2009-145](#)
Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; white



[Item No.: 2009-145/000-002](#)
Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; yellow



[Item No.: 248-501/000-006](#)
Mini-WSB marking card; as card; not stretchable; plain; snap-on type; blue



[Item No.: 248-501/000-007](#)
Mini-WSB marking card; as card; not stretchable; plain; snap-on type; gray



[Item No.: 248-501/000-023](#)
Mini-WSB marking card; as card; not stretchable; plain; snap-on type; green



[Item No.: 248-501/000-017](#)
Mini-WSB marking card; as card; not stretchable; plain; snap-on type; light green



[Item No.: 248-501/000-012](#)
Mini-WSB marking card; as card; not stretchable; plain; snap-on type; orange



[Item No.: 248-501/000-005](#)
Mini-WSB marking card; as card; not stretchable; plain; snap-on type; red



[Item No.: 248-501/000-024](#)
Mini-WSB marking card; as card; not stretchable; plain; snap-on type; violet



[Item No.: 248-501](#)
Mini-WSB marking card; as card; not stretchable; plain; snap-on type; white



[Item No.: 248-501/000-002](#)
Mini-WSB marking card; as card; not stretchable; plain; snap-on type; yellow

1.1.2.3 Marker carrier



[Item No.: 750-103](#)
Group marker carrier

1.1.3 Potential distribution

1.1.3.1 Potential distribution module



[Item No.: 750-614](#)
Potential Distribution



1.1.4 Shield termination

1.1.4.1 Shield clamping saddles



Item No.: 790-108
Shield clamping saddle; 11 mm wide; dia-
meter of compatible conductor; 3 ... 8 mm



Item No.: 790-208
Shield clamping saddle; 12.4 mm wide;
3 ... 8 mm



Item No.: 790-116
Shield clamping saddle; 19 mm wide; dia-
meter of compatible conductor; 7 ... 16
mm



Item No.: 790-216
Shield clamping saddle; 21.8 mm wide;
6 ... 16 mm



Item No.: 790-124
Shield clamping saddle; 27 mm wide; dia-
meter of compatible conductor; 6 ... 24
mm



Item No.: 790-220
Shield clamping saddle; 30 mm wide; 6 ...
20 mm



Item No.: 790-140
Shield clamping saddle; diameter of com-
patible conductor

1.1.5 Supply module

1.1.5.1 Supply module



Item No.: 750-612
Power Supply; 0 ... 230 V AC/DC



Item No.: 750-602
Power Supply; 24 VDC



Item No.: 750-601
Power Supply; 24 VDC; fuse holder



Item No.: 750-610
Power Supply; 24 VDC; fuse holder; Dia-
gnostics

1.1.6 System enclosure

1.1.6.1 System enclosure



Item No.: 850-825
IP65 enclosure; Aluminium (RAL 7032);
WxHxD (160x100x160 mm); 9 x M12, 4 x
M20



Item No.: 850-826
IP65 enclosure; Aluminium (RAL 7032);
WxHxD (240x100x160 mm); 4 x M20, 4 x
M16, 14 x M12 cable grip



Item No.: 850-827
IP65 enclosure; Aluminium (RAL 7032);
WxHxD (320x100x160 mm); 4 x M20, 8 x
M16, 17 x M12 cable grip



Item No.: 850-828
IP65 enclosure; Aluminium (RAL 7032);
WxHxD (480x100x160 mm); 4 x M20, 10 x
M16, 35 x M12 cable grip



Item No.: 850-826/002-000
IP65 enclosure; Aluminium (RAL 7035);
WxHxD (240x100x160 mm); 4 x M20, 4 x
M16, 14 x M12 cable grip



Item No.: 850-827/002-000
IP65 enclosure; Aluminium (RAL 7035);
WxHxD (320x100x160 mm); 4 x M20, 8 x
M16, 17 x M12 cable grip



Item No.: 850-828/002-000
IP65 enclosure; Aluminium (RAL 7035);
WxHxD (480x100x160 mm); 4 x M20, 10 x
M16, 35 x M12 cable grip



Item No.: 850-834
IP65 enclosure; Polyester (RAL 7032); Wx-
HxD (164x100x164 mm); 9 x M12, 4 x M20



Item No.: 850-835
IP65 enclosure; Polyester (RAL 7032); Wx-
HxD (244x100x164 mm); 4 x M20, 4 x
M16, 14 x M12 cable grip



Item No.: 850-836
IP65 enclosure; Polyester (RAL 7032);
WxHxD (324x100x164 mm); 4 x M20, 8 x
M16, 17 x M12 cable grip



Item No.: 850-814/002-000
IP65 enclosure; Sheet steel (RAL 7035);
WxHxD (200x120x200 mm); without flan-
ge plate



Item No.: 850-815/002-000
IP65 enclosure; Sheet steel (RAL 7035);
WxHxD (300x120x200 mm); without flan-
ge plate



Item No.: 850-816/002-000
IP65 enclosure; Sheet steel (RAL 7035);
WxHxD (400x120x200 mm); without flan-
ge plate



Item No.: 850-817/002-000
IP65 enclosure; Sheet steel (RAL 7035);
WxHxD (600x120x200 mm); without flan-
ge plate