

**COMPUTER
VISION
PORTFOLIO**

Basler Vision Solutions	4	Line Scan Cameras	42
pylon Software Suite	6	Basler racer	42
pylon vTools	10	Basler racer 2	43
pylon AI vTools	12	3D Cameras	44
Camera Features	14	Basler ToF Camera	44
PGI	14	Basler Stereo Cameras	46
Beyond Features	15	Basler Robotics Application Software	50
SWIR Camera Features	15	PC Cards	52
MED Feature Sets	15	Frame Grabber	56
Area Scan Cameras	16	Capabilities & Services	58
Basler ace 2	16	Lenses	60
Basler ace 2 GMSL	20	Lighting	62
Basler ace 2 IP67	22	Basler Worldwide	66
Basler ace	24		
Basler MED ace	28		
Basler boost	32		
Basler dart	34		
Basler dart M	36		
SWIR and UV Cameras	38		
Basler ace 2 X visSWIR	38		
Basler ace 2 X UV	40		

How to Read Our Camera Model Names

ac	A	2040	180	k	m	NIR
Model	Type	Resolution	Frame Rate	Interface	Color	Spectrum
a2 = ace 2	A = Area scan	Horizontal	Number of frames per	k = CL	m = mono	NIR = Near Infrared
ac = ace	L = Line scan	pixels	second (fps)	c = CoaXPress	c = color	SWIR = Short Wavelength Infrared
bo = boost	T = TDI		at full AOI	g = GigE		UV = Ultraviolet
da = dart				g5 = 5GigE		Product Line
dm = dart M				u = USB 3.0		BAS = Basic
pu = pulse				mg = GMSL		PRO = Pro
ra = racer				m = BCON for MIPI		ISP
r2 = racer 2						i = Internal ISP for MIPI cameras
						IP67
						IP67 = Ingress Protection 67

Specifications are subject to change without notice.

Keys

New: ★ Coming soon: ⌚ Preliminary: !



We Give Technology the Power of Sight

The needs and requirements of our customers drive us to create innovative and reliable vision solutions. Through lean product design and efficient production, we reduce effort, errors, and costs, allowing us to offer high-quality cameras, vision products, and software for vision systems at an attractive price-performance ratio.

Quality & Quality Assurance

We believe that the quality and reliability of our products are of the highest importance. To ensure these high quality requirements are met, we rely on seamless monitoring with standardized quality assurance processes. For example, every industrial camera we produce undergoes "9 + 1" tests: Nine standard tests and one additional customized test on request. Our suppliers are also subject to strict quality controls: Our R&D team thoroughly tests all supplier products, including regular functional and interoperability tests. This allows our customers to rely on our products for exceptional quality and unwavering performance.

Fast, Seamless Integration

With a portfolio of approximately 5,000 hardware and software products, we offer all the components needed to build a complete vision system. We ensure their full compatibility by developing our products according to dedicated system specifications and through systematic testing. When our customers develop a vision system based on our products, they can count on minimal investment and maximum efficiency.

Worldwide Support

With more than 37 years of experience from many successful customer projects and with a strong global presence, we provide a high level of application engineering and support. Our sales experts and regional application engineers are ready to support you with their knowledge.

The Management Board



Hardy Mehl
CEO

Ines Brückel
CFO

Dr. Kai Jens Ströder
CTO

“ We firmly believe that advances in vision technology improve the quality of our lives. Because of this, we give technology the power of sight. ”

Basler Vision Solutions

Everything you need to build your vision system

A vision solution is more than just a camera. It is the software, lighting, lenses, cables, acquisition cards, and other components that make up a functioning unit. To achieve the best results, it is essential that all components are compatible and work together seamlessly. As vision experts, we not only provide the necessary hardware and software, but also guide you through the development process of your vision solution.

Vision Hardware Portfolio

All the components to set up your vision solution



Extensive product range

Coordinated vision products from a single source



Long-term availability

Extensive product availability for long-term integration into your system



High reliability

Certified and tested products for reliable performance



Easy system setup & simple integration

Supplemented by (local) FAE support before and after the buying decision

pylon Software Suite

The software that brings your vision solution to life

The pylon Software Suite is a collection of features and tools for creating computer vision applications. Handle the entire image processing pipeline in one software: Set image parameters and use pylon vTools and pylon AI for advanced, robust image analysis.

Learn more about the pylon Software Suite on page 6.



pylon Software Suite

The all-in-one machine vision software

The pylon Software Suite is a collection of features and tools for creating computer vision applications. Handle the entire image processing pipeline in one software: Set image parameters and utilize pylon vTools and pylon AI for advanced, robust image analysis. Quickly turn prototypes into target applications with the pylon SDK developer toolset.



Real-time image acquisition
Industry-leading low latency and jitter



Best image quality
Configure camera and in-camera image pre-processing features for the best images



Minimized development time
pylon SDK, pylon APIs and other tools simplify deployment to target applications and easy system debugging



Add-ons for image processing and analysis
pylon vTools and pylon AI offer both classic and AI-based analysis algorithms that can be flexibly combined to meet your application needs




AI image analysis
Now available: pylon AI for challenging use cases

More information:
baslerweb.com/pylon-software-suite



The pylon Software Suite at a Glance

The pylon Software Suite includes all the software components needed to develop machine vision solutions.

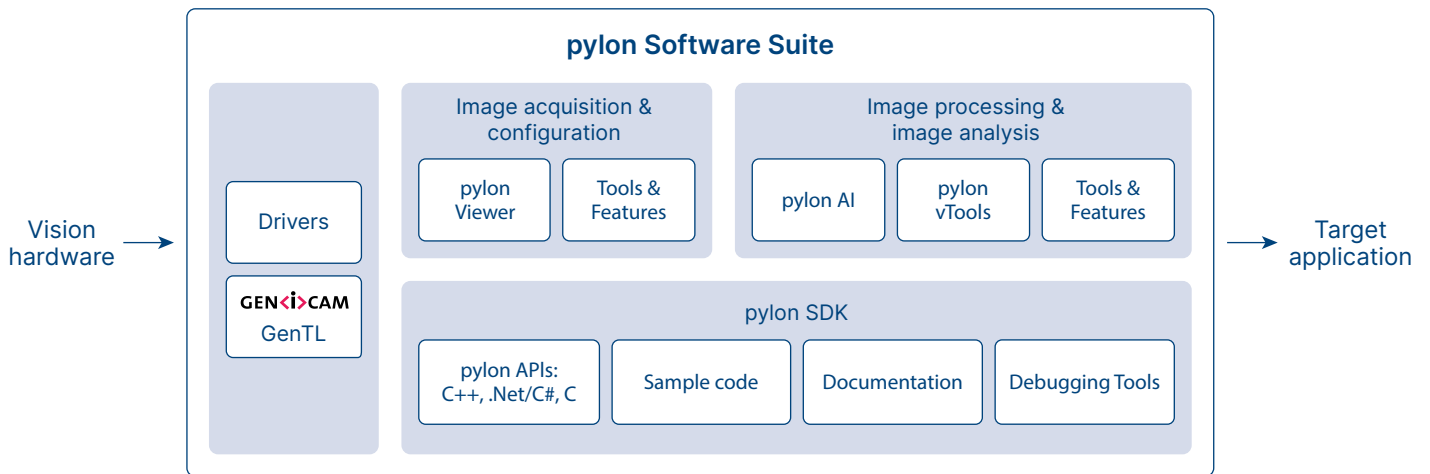

Scope of the pylon Software Suite

The pylon Software Suite runs on common operating systems and provides easy, flexible, and universal integration with target applications.

Certified drivers

Reliable performance for Windows, Linux, macOS, and Android.

Supported interfaces

USB3, 5GigE and GigE, CXP-12, MIPI CSI-2, Camera Link, and others.

GenICam standard conformity

Connect machine vision hardware to your application in a standardized way using pylon GenTL producer. With the pylon APIs, we provide convenient universal functions that encapsulate the GenICam standard.



pylon Viewer


The pylon Viewer is the central tool to acquire images and set and configure image parameters. With a live image, the pylon Viewer allows for fast camera evaluation.

Best image quality with powerful tools

Features such as the Color Calibrator, Sharpness Indicator, or Bandwidth Manager help you get the best image from Basler cameras

Fast prototyping


Easy-to-use GUI, live image, and tools and features simplify your development process

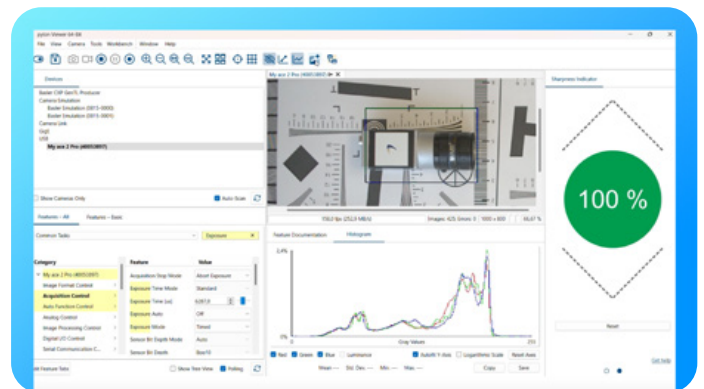

The Sharpness Indicator feature helps you to focus your lens correctly. It visualizes the optimal focus.

pylon SDK

The pylon SDK provides easy-to-learn programming interfaces that allow you to increase the productivity and stability of your applications. It includes the pylon APIs in C++, C and .Net programming languages, numerous code examples for all types of functionalities, as well as comprehensive developer documentation.

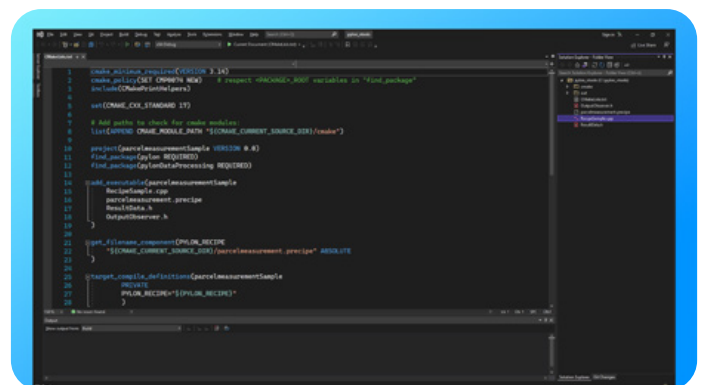

pylon vTools and pylon AI

pylon vTools and pylon AI are high-performance image processing and analysis functions with classic and AI algorithms, respectively. With the add-ons, flexibly create advanced, robust image analysis pipelines and with our set of tools, deploy everything you need into your application.

Image processing pipelines with drag-and-drop ease

Run and combine pylon vTools and pylon AI without programming

Get fast results


Test and adjust your image processing pipeline with a few clicks and evaluate your results using a live image.

Only buy what you need

With pylon vTools and pylon AI, you don't purchase an extensive vision library – you only opt for the functions that you actually use.

Make your application robust

pylon vTools and pylon AI operate with performant, robust algorithms for better results with fewer errors.

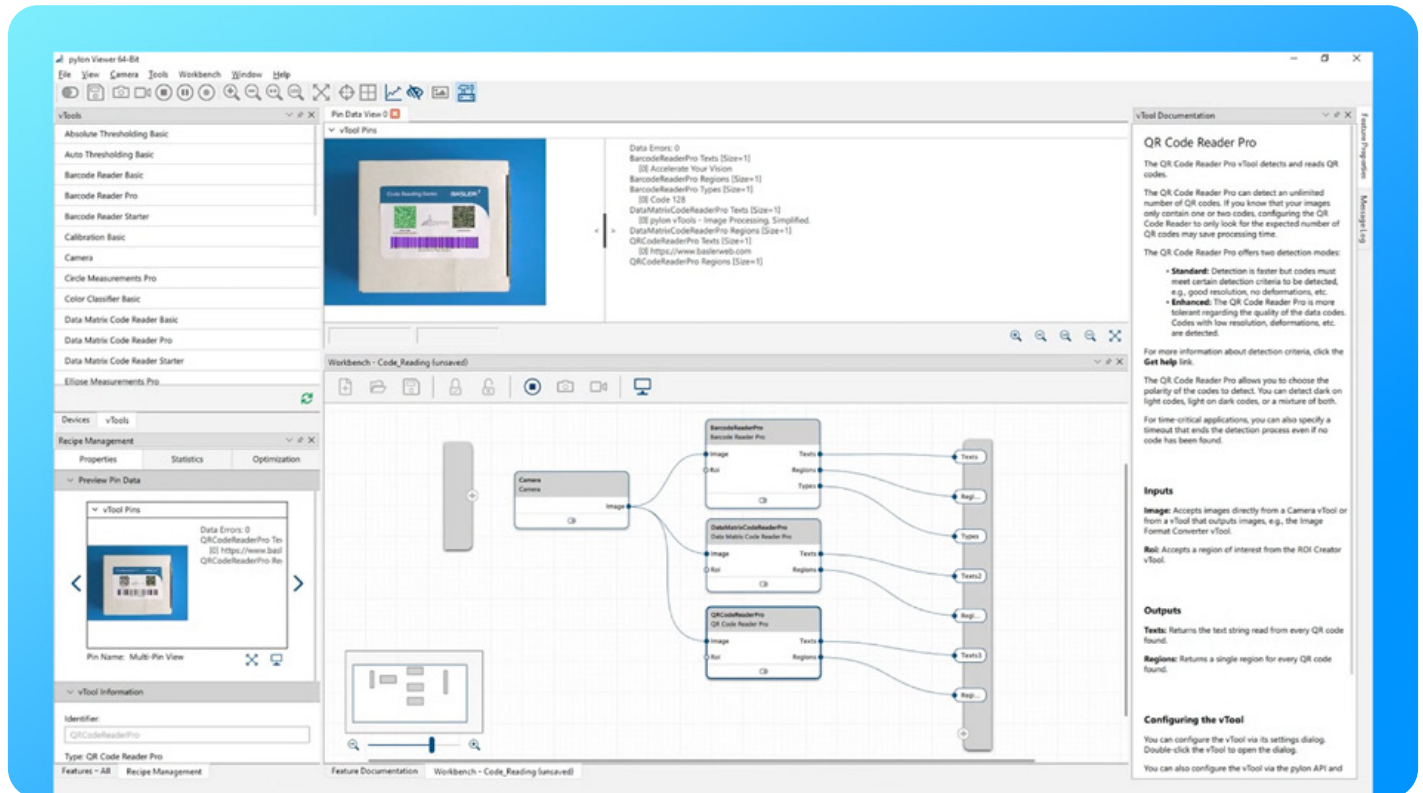


An image processing pipeline, called a recipe. It consists of several code-reading vTools.



The efficient AI software for image analysis


With its deep learning algorithms, pylon AI enables complex image analysis such as object detection or segmentation. Unique to computer vision software, the new performance benchmarking feature allows users to determine the most powerful processing hardware for their application.

More information: baslerweb.com/pylon-ai

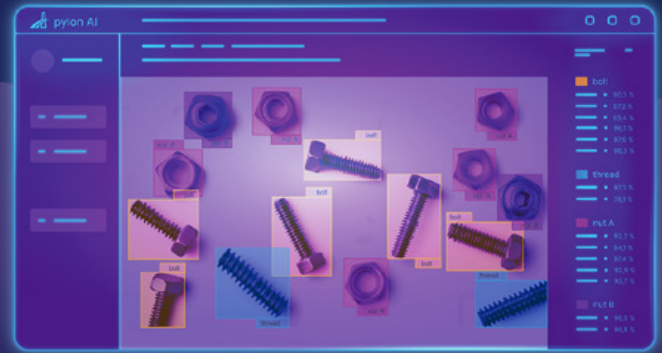

AI Add-ons for Advanced, Robust Image Analysis

Choose flexibly from ONNX AI models, use your own data sets to enhance your AI model, and optimize your AI model for your target processing hardware. Without any programming, pylon AI can be used by anyone.

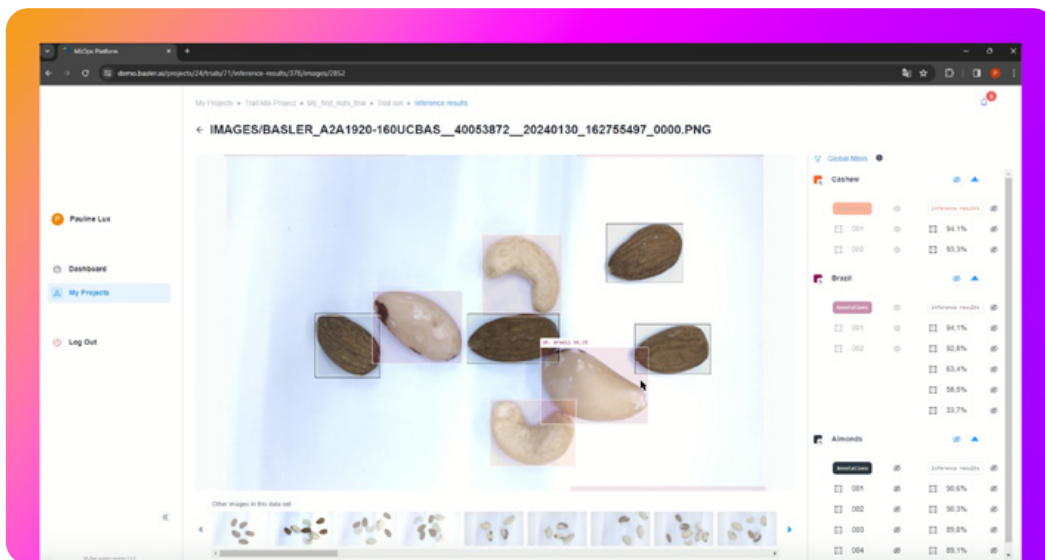

Object detection with pylon AI: Different types of nuts are detected. The inference results are output with a probability calculation.

Maximize the performance of your AI application

Benchmark the performance of your AI model across a range of processors and AI chips.

Optimize AI model for vision applications

Optimize your AI model for your processing hardware and enhance the AI vTool's specific algorithm.

Simple: No programming










Create image analysis functions with drag-and-drop ease and deploy them to target applications using proven pylon APIs.

Flexibility thanks to ONNX AI model format

Whether your AI model is trained in PyTorch, TensorFlow, or NVIDIA TAO – pylon AI is compatible with a wide range of AI frameworks thanks to the ONNX format.

pylon vTools

Add-ons for image analysis with classic algorithms

vTool	Description	License Variants	Order No.	Price
General Image Processing Bundle 	Comprehensive vTools bundle for a wide range of common image processing applications The pylon vTool All-in-One Bundle contains a wide range of vTools in a single license. This means that all functions of the listed individual modules are available in one license, which can be used for various industrial image processing applications.	Included are: Calibration, (Color) BLOB Analysis, Measurements, Geometric Pattern Matching, Template Matching, Preprocessing, OCR, Code Reading Bundle	20282	2,039.00 € ¹
Code Reader Bundle 	All common code readers in one bundle for reliable code detection The pylon vTool Code Reader Bundle includes five code readers for barcodes, Data Matrix codes, Aztec codes, QR codes, and PDF417 codes in a single license. The code readers are easy to implement and offer the fastest way to achieve high-performance code recognition with excellent recognition rates.	All readout functions of the individual vTools are available in one license, which can be used for various industrial applications.	20281	1,019.00 € ¹
OPC UA Client 	Interoperability for your image processing system The OPC UA standard offers a simple and standardized way to exchange data and information between machines, independent of platform and manufacturer.	Basic: For plug-and-play integration of image processing data exchange	20247	125.00 € ¹
Barcode Reader 	Fast and Robust Recognition of All Types of Barcodes Barcode reading licenses include pylon vTools for recognizing and decoding barcodes of up to 28 different bar code types. Easy to implement, they provide the fastest path to powerful bar code recognition with best-in-class recognition rates.	Basic: Up to two barcodes per image and one group of barcodes per instance Pro: Unlimited number of barcodes per image from each of the 28 different barcode types	20085	88.00 € ¹
Data Matrix Code Reader 	Fast and Robust Recognition of Data Matrix Codes Data matrix code reading licenses include pylon vTools for recognizing and decoding data matrix codes. Easy to implement, they provide the fastest path to powerful data matrix code recognition with best-in-class recognition rates.	Basic: For up to three Data Matrix Codes per image, dark on bright background Pro: For an unlimited number of Data Matrix Codes per image, adjustable polarity, and enhanced recognition rate	20086	62.00 € ¹
QR Code Reader 	Fast and Robust Recognition of QR Codes QR code reading licenses include pylon vTools for recognizing and decoding QR codes. Easy to implement, they provide the fastest path to powerful QR code recognition with best-in-class recognition rates.	Basic: For up to three QR codes per image, dark on bright background Pro: For an unlimited number of QR codes per image, adjustable polarity, and enhanced recognition rate	20087	57.00 € ¹
PDF417 Code Reader 	Fast and Robust Recognition of PDF417 Codes This licenses include pylon vTools for PDF417 code recognition and decoding. These easy-to-use tools provide the fastest route to exceptional PDF417 code recognition with unmatched accuracy.	Basic: For up to three PDF417 codes per image, dark on bright background Pro: An unlimited number of PDF417 codes per image, adjustable polarity, and enhanced recognition rate	20180	45.00 € ¹
Aztec Code Reader 	Fast and Robust Recognition of Aztec Codes Aztec code reading licenses include pylon vTools for recognizing and decoding Aztec codes. Easy to implement, they provide the fastest path to powerful Aztec code recognition with best-in-class recognition rates.	Basic: For up to three Aztec codes per image, dark on bright background Pro: An unlimited number of Aztec codes per image, adjustable polarity, and enhanced recognition rate	20178	45.00 € ¹
OCR Basic 	Optical Character Recognition (OCR) Made Easy With this vTool Optical Character Recognition is made easy. Define the region of interest, choose from one of the standard fonts and adjust the segmentation to achieve fast character recognition.	Basic: Pretrained standard fonts	20209	88.00 € ¹


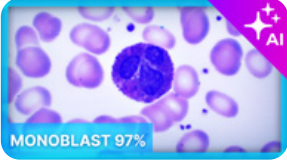




¹For EMEA only. Regional pricing available at baslerweb.com/pylon-vtools

vTool	Description	License Variants	Order No.	Price
Geometric Pattern Matching 	Edge-Based Algorithm for Simple and Robust Recognition of Shapes, Logos and Objects Geometric Pattern Matching licenses provide pylon vTools for easy training of shape models and high-performance, adjustable recognition of trained shapes on live images. Create shape models by marking areas on live images or on images from files.	Basic: Single pattern search, 360° rotation, without further scaling Pro: Single pattern search including scaling, adjustable angle and polarity	20116 20084	303.00 € ¹ 691.00 € ¹
Template Matching 	Correlation-based algorithm for simple and robust matching Template Matching licenses provide pylon vTools with robust correlation-based matching. Create a reference pattern by marking areas on live images or on images from files. The reference pattern is detected in the live image using normalized cross-correlation, making it robust to edge deformation, rotation, and blur. Images can be aligned with object positions from matching for further processing steps.	Basic: Matching at defined rotation levels with freeform definition	20117	109.00 € ¹
Calibration & Rectification 	Calibration for Precise Transformation from Pixel to Real World Coordinates The Calibration and Rectification license provides you with a pylon vTool to quickly and easily calibrate cameras for distortion correction and real world coordinate transformation. Create a precise transformation model that converts pixel coordinates of object positions, angles, or dimensions to real-world values.	Basic: Single image, single camera calibration for entocentric cameras Pro: Single image, single camera calibration for entocentric and telecentric cameras	20080 20182	109.00 € ¹ 521.00 € ¹
Measurements 	Measure distances along lines and geometric shapes The measurement license includes vTool for edge based measurement, along a line and geometric shapes. Also available in real world coordinates together with Calibration vTool.	Basic: Measure distances between edges along a line Pro: Measure along lines and geometric shapes	20083 20151	109.00 € ¹ 511.00 € ¹
BLOB Analysis 	Easy thresholding based image segmentation The BLOB-Analysis license includes pylon vTools for typical thresholding based BLOB analysis tasks, such as identifying regions by their grey value range. The license includes three thresholding tools: absolute thresholding, auto thresholding (binary), and relative thresholding for dynamic thresholding relative to a mean image.	Basic: Absolute thresholding, auto thresholding, and relative thresholding - including vTools for region morphology, object filtering, and feature extraction	20082	76.00 € ¹
Color BLOB Analysis 	Machine Learning-Based Object Recognition The Color Blob Analysis licenses include pylon vTools for blob analysis tasks that cannot be solved with common grayscale thresholding techniques, such as identifying objects by color. They include a machine-learning based pixel classifier for training and applying a Gaussian Mixture Model.	Basic: Training and application of a model for one class - including vTools for region morphology, object filtering, and feature extraction	20081	76.00 € ¹
Preprocessing 	High performant image preprocessing The Preprocessing license provides vTools for arithmetic operations as well as smoothing and morphology operations on images. With these high performance algorithms image features can be enhanced, masked or weakened, to improve and optimize for further image processing steps.	Basic: Arithmetic, smoothing, enhancement and morphology image operations	20150	71.00 € ¹
Document Cropper 	Fast and Easy Document Cropping This license allows you to easily crop rectangular documents for archiving. Simply set the threshold and this tool will automatically align and crop the document from a dark background.	Basic: For automatic document cropping and alignment	20187	75.00 € ¹


¹For EMEA only. Regional pricing available at baslerweb.com/pylon-vtools

pylon AI vTools

Add-ons for image analysis with AI algorithms

AI vTool	Description	Order No.	Price
 <p>Object detection</p>	<p>Locating and counting different and complex objects</p> <p>Object Detection licenses provide vTools for powerful, customizable, deep learning detection algorithms of objects on live images. Create object detection models by annotating objects on images from files. The free choice of deep learning algorithm in, for example, standard ONNX format enables an efficient training process customized to your requirements. Within the pylon AI Platform, you can optimize object detection models based on your performance needs and deploy the trained bundle to the pylon Software Suite. The images can be used for further processing steps based on the detected objects.</p>	20211	599.00 € ¹
 <p>Classification</p>	<p>Classification and systematic grouping of objects into categories</p> <p>Classification licenses provide vTools for powerful, customizable, deep learning classification algorithms of live images. Create classification models by annotating images from files. The free choice of deep learning algorithm in, for example, standard ONNX format enables an efficient training process customized to your requirements. Within the pylon AI Platform, you can optimize classification models based on your performance needs and deploy the trained bundle to the pylon Software Suite. The images can be used for further processing steps based on the classification prediction.</p>	20212	599.00 € ¹
 <p>Semantic segmentation</p>	<p>Identification of pixel clusters for object classes and background regions</p> <p>Semantic Segmentation licenses provide vTools for powerful, customizable, deep learning semantic segmentation algorithms of objects on live images. Create semantic segmentation models by annotating objects on images from files. The free choice of deep learning algorithm in standard ONNX format enables efficient, customizable training. Within the pylon AI Platform, you can optimize semantic segmentation models based on your performance needs and deploy the trained bundle to the pylon Software Suite. The images can be used for further processing steps based on the segmented objects.</p>	20214	599.00 € ¹
 <p>Instance segmentation</p>	<p>Prediction of pixel-accurate boundaries of each individual object</p> <p>Instance Segmentation licenses provide vTools for powerful, customizable, deep learning instance segmentation algorithms of objects on live images. Create instance segmentation models within the pylon AI platform by annotating objects on images from files. The free choice of deep learning algorithm in, for example, standard ONNX format enables an efficient training process customized to your requirements. Within the pylon AI Platform, you can optimize instance segmentation models based on your performance needs and deploy the trained bundle to the pylon Software Suite. The images can be used for further processing steps based on the segmented objects.</p>	20213	599.00 € ¹
 <p>OCR Pro</p>	<p>Character recognition under difficult, changing readout conditions</p> <p>The OCR vTool makes optical character recognition easy, even on difficult backgrounds. With the help of deep learning algorithms, even inhomogeneous characters can be reliably recognized. Define the relevant area (ROI), define a text format if possible and select a suitable deep learning model to achieve fast character recognition.</p>	20210	on request
 <p>Anomaly Detection</p>	<p>Identifying unusual patterns and deviations from expected attributes</p> <p>Anomaly Detection licenses provide vTools for advanced, customisable deep learning algorithms to detect inconsistencies and anomalies in live data streams. This enables product deviations to be recognised and provides precise quality assurance</p>	20257	on request

¹For EMEA only. Regional pricing available at baslerweb.com/pylon-ai

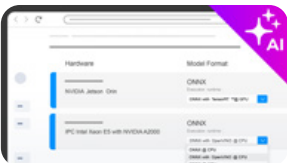pylon AI Platform	Description	Order No.	Price
 <p>pylon AI Platform</p>	<p>The pylon AI Platform is a web application for MLOps (Machine Learning Operations), where you can optimize your AI model based on your image data. The license is valid for 365 days. It includes 5 user accounts.</p>	20238	7,000.00 € p.a.

	pylon for Windows	pylon for Linux x86	pylon for Linux ARM	pylon for macOS	pylon for Android
Platform					
Supported OS Version	10 (64 bit), 11 (64 bit)	Ubuntu 18.04 or newer (64 bit), CentOS 8.0-1905 or newer (64 bit)	Ubuntu 18.04 or newer (64 bit)	10.14, 10.15, 11.1 (Intel 64 bit)	8, 9, 10, 11
Configuration Tools					
pylon Workbench & vTools	•	•	•		
pylon Viewer	•	•	•	•	
pylon GigE Configurator	•	•	•		
pylon IP Configurator	•	•	•	•	
pylon USB Configurator	•				
pylon Camera Link Configurator	•				
Firmware Updater	•	•	•		
CXP Grabber Firmware Updater	•	•			
CXP gpioTool	•	•			
Color Calibrator for MED ace cameras	•	•	•	•	
MPEG-4 Video Recording	•	•	•		
blaze 3D viewer	•	• (Ubuntu 18.04 or newer)			
Application Development					
Data Processing C++ API	•	•	•		
C++ API	•	•	•	•	•
VB.Net / C# API	•				
C API	•	•	•		
Java API					•
GenTL					
USB3 Vision	•	•	•	•	
GigE Vision	•	•	•	•	
CoaXPress 2.0	•	•			
BCON for MIPI			•		
blaze 3D	•	•	•		
Interface Driver					
Direct Show Driver (U3V, GEV)	•				
TWAIN Driver (U3V, GEV)	•				
NeuroCheck Driver (U3V, GEV)	•				
CoaXPress 2.0 Driver	•	•			
GigE Vision Driver	•	•	•	•	
USB3 Vision Driver	•	•	•	•	•
Camera Link Driver	•				
BCON for MIPI Driver			•		

Our Unique Camera Features

Unique features that add real value to a vision system and help save time and money are key to an efficient and reliable setup. They are the most important element in determining productivity, performance, and ease-of-use.



PGI Feature Set

For optimized images



SWIR Imaging

Pixel Correction Beyond and Line Noise Reduction



Beyond Features

Compression Beyond and Pixel Beyond



MED Feature Sets

Combine powerful hardware, firmware and software features


PGI

Several of our newest camera models come with our powerful in-camera image optimization technology already built in: This proprietary PGI feature set enhances your images at the full speed of your camera. PGI is comprised of a unique feature combination:




5x5 Debayering

Provides true color images without artifacts.

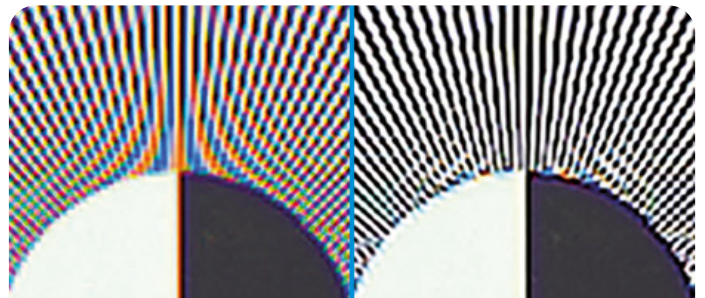


Color-Anti-Aliasing

Reduces the appearance of false colors at edges in the image.

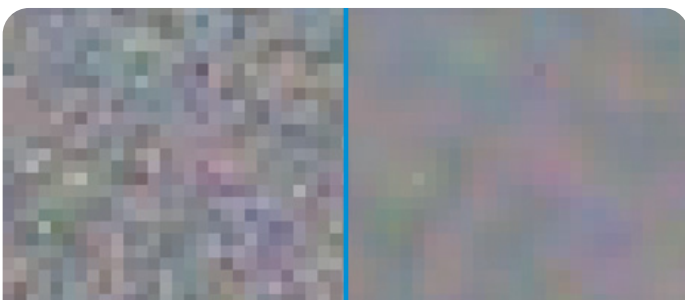

Denoising

Improves the imaging of the finest structures.

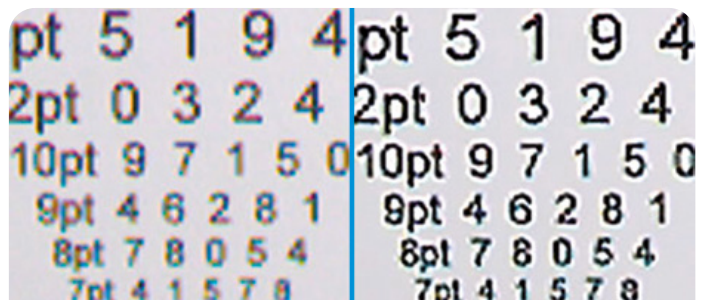

Improved Sharpness


Reduces the appearance of noise – inhomogeneities – in the image.

With PGI, your camera will produce better images than ever, without putting additional load on your processor. The PGI feature set is included in all color and mono cameras of the dart Classic, dart R, dart E and pulse series, as well as in color and mono cameras of the MED ace, ace U, ace L, and ace 2 Pro product lines.

Learn more about PGI at baslerweb.com/PGI

Beyond Features

Our ace 2 Pro and ace 2 X UV cameras offer unique features that provide you with immediate added value. The Beyond features are often patented or patent pending and are particularly characterized by functionality that is unique in the market.

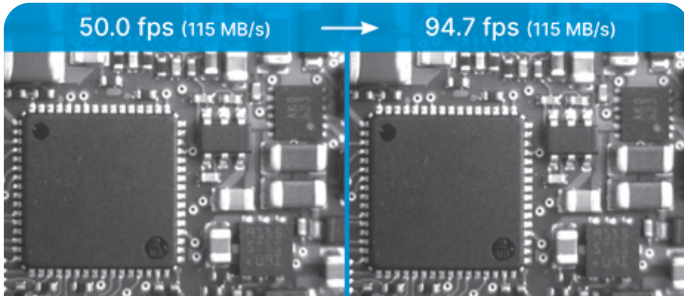

Compression Beyond

Provides lossless data compression for faster frame rates and higher throughput.




Pixel Beyond

Allows flexible scalability of pixel sizes and adjustment in resolution.

Learn more about our Beyond features at baslerweb.com/beyond-features


SWIR Camera Features

SWIR sensors (short wavelength infrared, or SWIR) based on InGaAs technology tend to have pixel defects and a higher noise level. Basler's innovative firmware features improve the images within the camera and are one of the reasons for the outstanding image quality of our ace 2 X visSWIR cameras.

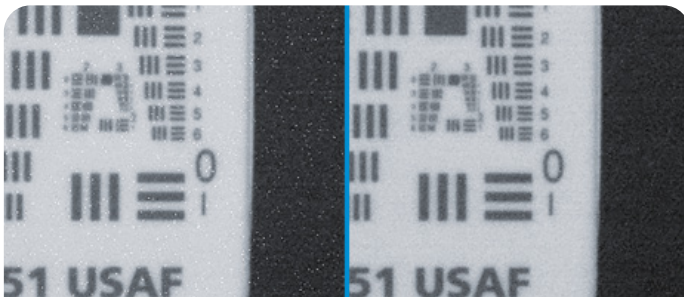

Pixel Correction Beyond

Reduces pixel defects directly in the camera's FPGA.

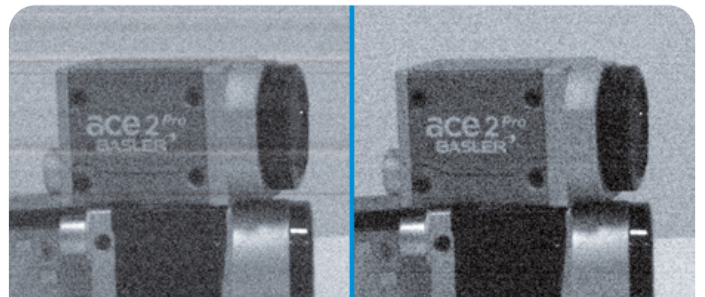

Line Noise Reduction

Minimizes background noise, which is visible as horizontal stripes in the image.

Learn more about our SWIR camera features at baslerweb.com/ace2x-swir

MED Feature Sets

MED Feature Sets are as versatile as your applications in medicine, medical technology, and life sciences. They are part of every MED ace camera and combine specially developed hardware, firmware, and software functions for superior performance.

Learn more about our MED Feature Set at page 26 and at baslerweb.com/med-feature-sets

Basler ace 2

As versatile as your application

The ace 2 camera, with its proven compact design, offers maximum versatility. Thanks to the wide range of sensors and interfaces, you will always find the right camera for your application. Commissioning and control are simple and the image quality can be individually adjusted.



Sensor variety

Up to 25 MP resolution, global and rolling shutter, from UV to SWIR



Interface variety

Choose from a CoaXPress, USB 3.0, GigE, 5GigE, or GMSL2 interface



Optimal handling & image quality

Easy commissioning, wide range of control options, best image quality



Small housing

Space-saving housing measuring 29 mm x 29 mm; optional IP65/67 protection

More Information: baslerweb.com/ace2




ace 2 GigE / 5GigE

Product Group Specifications

Interface	Fast Ethernet (100 Mbit/s), GigE (1000 Mbit/s), 2.5GigE (2500 Mbit/s), 5GigE (5000 Mbit/s)
Housing Size [L x W x H]	55.5 mm x 29 mm x 29 mm
Housing Temperature During Operation	ace 2 Basic: -10 °C – 60 °C, ace 2 Pro: 0 °C – 50 °C
Typical Weight	100 g
Lens Mount	C-mount
Power Supply	Power over Ethernet (IEEE 802.3af) ¹ or 12-24 VDC (+/- 10%)
Digital I/O	1 opto-isolated input + 2 GPIO
Synchronization	Via hardware trigger, via software trigger or free-run
Exposure Control	Via hardware trigger or programmable via the camera API
Conformity	CE, RoHS, GenICam, GigE Vision 2.0, IP30, UL ¹ , FCC, KC, EAC ²
Driver	pylon Software Suite or 3rd party GigE Vision Software
Operating System	Windows, Linux, macOS, Android

¹ Not available for ace 2 Basic 5GigE models. ² Only for selected models, please refer to our website baslerweb.com/ace2 for detailed information.

Camera Model	Sensor	Resolution [HxV pixels]	Resolution [MP]	Sensor Type	Shutter	Frame Rate [fps]	Pixel Size [µm ²]	Optical Size ["]
ace 2 Basic – 5GigE								
a2A1920-165g5m/g5cBAS	IMX392	1920 x 1200	2.3	CMOS	Global	168	3.45 x 3.45	1/2.3
a2A2048-114g5m/g5cBAS	IMX900	2048 x 1536	3.2	CMOS	Global	114	2.25 x 2.25	1/3.1
a2A2448-105g5m/g5cBAS	IMX547	2448 x 2048	5	CMOS	Global	106	2.74 x 2.74	1/1.8
a2A2440-98g5m/g5cBAS	IMX250	2448 x 2048	5	CMOS	Global	98	3.45 x 3.45	2/3
a2A2840-67g5m/g5cBAS	IMX546	2840 x 2840	8	CMOS	Global	67	2.74 x 2.74	2/3
a2A4096-44g5m/g5cBAS	IMX545	4096 x 3000	12.3	CMOS	Global	44	2.74 x 2.74	1/1.1
a2A3536-42g5m/g5cBAS	IMX676	3536 x 3536	12.5	CMOS	Rolling	42	2 x 2	1/1.6
a2A5320-34g5m/g5cBAS	IMX542	5320 x 3032	16.1	CMOS	Global	34	2.74 x 2.74	1.1
a2A4504-27g5m/g5cBAS	IMX541	4504 x 4504	20.2	CMOS	Global	27	2.74 x 2.74	1.1
a2A5328-22g5m/g5cBAS	IMX540	5328 x 4608	24.4	CMOS	Global	22	2.74 x 2.74	1.2
a2A5060-21g5m/g5cBAS	E2525A	5060 x 5060	25	CMOS	Global	21	2.5 x 2.5	1.1
★ a2A2464-115g5m/g5cBAS	OG05C	2448 x 2048	5	CMOS	Global	115	3.45 x 3.45	2/3

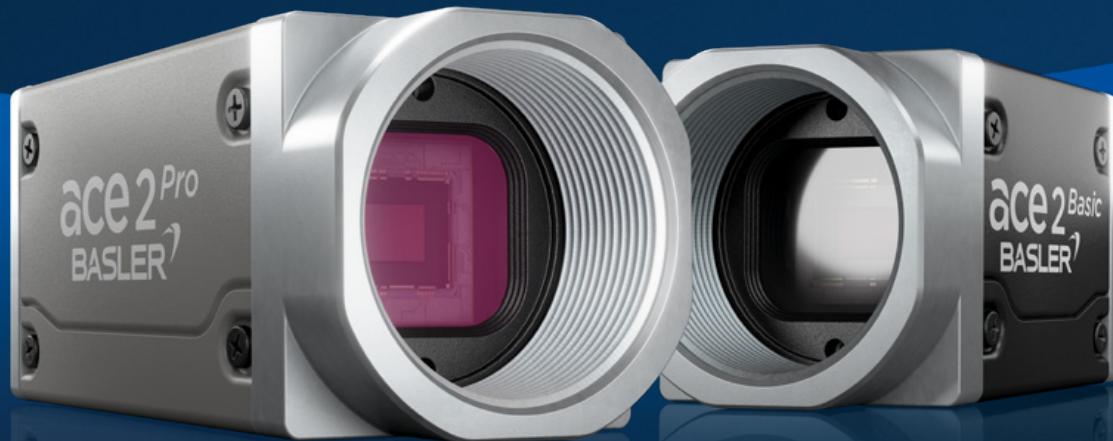

Camera Model	Sensor	Resolution [H×V pixels]	Resolution [MP]	Sensor Type	Shutter	Frame Rate [fps]	Pixel Size [μm ²]	Optical Size ["]
ace 2 Basic – GigE								
a2A1920-51gm/gcBAS	IMX392	1920 × 1200	2.3	CMOS	Global	51	3.45 × 3.45	1/2.3
a2A2048-37gm/gcBAS	IMX900	2048 × 1536	3.2	CMOS	Global	37	2.25 × 2.25	1/3.1
a2A2590-22gm/gcBAS	IMX334ROI	2592 × 1944	5	CMOS	Rolling	22	2.0 × 2.0	1/2.8
a2A2448-23gm/gcBAS	IMX547	2448 × 2048	5	CMOS	Global	23	2.74 × 2.74	1/1.8
a2A2600-20gm/gcBAS	GMAX2505	2600 × 2160	5.6	CMOS	Global	20	2.5 × 2.5	1/2
a2A2840-14gm/gcBAS	IMX546	2840 × 2840	8	CMOS	Global	14	2.74 × 2.74	2/3
a2A3840-13gm/gcBAS	IMX334	3840 × 2160	8.3	CMOS	Rolling	13	2.0 × 2.0	1/1.8
a2A4200-12gm/gcBAS	GMAX2509	4200 × 2160	9.1	CMOS	Global	12	2.5 × 2.5	2/3
a2A4096-9gm/gcBAS	IMX545	4096 × 3000	12.3	CMOS	Global	9	2.74 × 2.74	1/1.1
a2A3536-9gm/gcBAS	IMX676	3536 × 3536	12.5	CMOS	Rolling	9	2 × 2	1/1.6
a2A5320-7gm/gcBAS	IMX542	5320 × 3032	16.1	CMOS	Global	7	2.74 × 2.74	1.1
a2A4508-6gm/gcBAS	GMAX2518	4508 × 4096	18	CMOS	Global	6	2.5 × 2.5	1
a2A4504-5gm/gcBAS	IMX541	4504 × 4504	20.2	CMOS	Global	5	2.74 × 2.74	1.1
a2A5328-4gm/gcBAS	IMX540	5328 × 4608	24.4	CMOS	Global	4	2.74 × 2.74	1.2
a2A5060-4gm/gcBAS	E2525A	5060 × 5060	25	CMOS	Global	4	2.5 × 2.5	1.1
★ a2A2464-23gm/gcBAS	OG05C	2448 × 2048	5	CMOS	Global	23	3.45 × 3.45	2/3
ace 2 Pro – GigE PGI BEYOND								
a2A1920-51gm/gcPRO	IMX392	1920 × 1200	2.3	CMOS	Global	51 ¹	3.45 × 3.45	1/2.3
a2A2048-37gm/gcPRO	IMX900	2048 × 1536	3.2	CMOS	Global	37 ¹	2.25 × 2.25	1/3.1
a2A2590-22gm/gcPRO	IMX334ROI	2592 × 1944	5	CMOS	Rolling	22 ¹	2.0 × 2.0	1/2.8
a2A2448-23gm/gcPRO	IMX547	2448 × 2048	5	CMOS	Global	23 ¹	2.74 × 2.74	1/1.8
a2A2600-20gm/gcPRO	GMAX2505	2600 × 2160	5.6	CMOS	Global	20 ¹	2.5 × 2.5	1/2
a2A2840-14gm/gcPRO	IMX546	2840 × 2840	8	CMOS	Global	14 ¹	2.74 × 2.74	2/3
a2A3840-13gm/gcPRO	IMX334	3840 × 2160	8.3	CMOS	Rolling	13 ¹	2.0 × 2.0	1/1.8
a2A4200-12gm/gcPRO	GMAX2509	4200 × 2160	9.1	CMOS	Global	12 ¹	2.5 × 2.5	2/3
a2A4096-9gm/gcPRO	IMX545	4096 × 3000	12.3	CMOS	Global	9 ¹	2.74 × 2.74	1/1.1
a2A3536-9gm/gcPRO	IMX676	3536 × 3536	12.5	CMOS	Rolling	9 ¹	2 × 2	1/1.6
a2A5320-7gm/gcPRO	IMX542	5320 × 3032	16.1	CMOS	Global	7 ¹	2.74 × 2.74	1.1
a2A4508-20gm/gcPRO	GMAX2518	4508 × 4096	18	CMOS	Global	6 ¹	2.5 × 2.5	1
a2A4504-5gm/gcPRO	IMX541	4504 × 4504	20.2	CMOS	Global	5 ¹	2.74 × 2.74	1.1
a2A5328-4gm/gcPRO	IMX540	5328 × 4608	24.4	CMOS	Global	4 ¹	2.74 × 2.74	1.2
★ a2A2464-23gm/gcPRO	OG05C	2448 × 2048	5	CMOS	Global	23 ¹	3.45 × 3.45	2/3

¹ Higher frame rates possible with Compression Beyond. Please refer to our website baslerweb.com/ace2 for detailed information.

ace 2 USB

Product Group Specifications

Interface	USB 3.0
Housing Size [L x W x H]	42.8 mm x 29 mm x 29 mm
Housing Temperature During Operation	ace 2 Basic: -10 °C – 60 °C, ace 2 Pro: 0 °C – 50 °C
Typical Weight	85 g
Lens Mount	C-mount
Power Supply	Via USB 3.0 interface
Digital I/O	1 opto-isolated input + 2 GPIO
Synchronization	Via hardware trigger, via software trigger or free-run
Exposure Control	Via hardware trigger or programmable via the camera API
Conformity	CE, RoHS, GenICam, USB3 Vision, IP30, UL, FCC, KC, EAC ¹
Driver	pylon Software Suite or 3rd party USB3 Vision Software
Operating System	Windows, Linux, macOS, Android

¹ Only for selected models, please refer to our website baslerweb.com/ace2 for detailed information.

Camera Model	Sensor	Resolution [HxV pixels]	Resolution [MP]	Sensor Type	Shutter	Frame Rate [fps]	Pixel Size [µm ²]	Optical Size ["]
ace 2 Basic								
a2A1920-160um/ucBAS	IMX392	1920 x 1200	2.3	CMOS	Global	160	3.45 x 3.45	1/2.3
a2A2048-114um/ucBAS	IMX900	2048 x 1536	3.2	CMOS	Global	114	2.25 x 2.25	1/3.1
a2A2590-60um/ucBAS	IMX334ROI	2592 x 1944	5	CMOS	Rolling	60	2.0 x 2.0	1/2.8
a2A2448-75um/ucBAS	IMX547	2448 x 2048	5	CMOS	Global	75	2.74 x 2.74	1/1.8
a2A2600-64um/ucBAS	GMAX2505	2600 x 2160	5.6	CMOS	Global	64	2.5 x 2.5	1/2
a2A2840-48um/ucBAS	IMX546	2840 x 2840	8	CMOS	Global	48	2.74 x 2.74	2/3
a2A3840-45um/ucBAS	IMX334	3840 x 2160	8.3	CMOS	Rolling	45	2.0 x 2.0	1/1.8
a2A4200-40um/ucBAS	GMAX2509	4200 x 2160	9.1	CMOS	Global	40	2.5 x 2.5	2/3
a2A4096-30um/ucBAS	IMX545	4096 x 3000	12.3	CMOS	Global	30	2.74 x 2.74	1/1.1
a2A3536-31um/ucBAS	IMX676	3536 x 3536	12.5	CMOS	Rolling	31	2 x 2	1/1.6
a2A5320-23um/ucBAS	IMX542	5320 x 3032	16.1	CMOS	Global	23	2.74 x 2.74	1.1
a2A4508-20um/ucBAS	GMAX2518	4508 x 4096	18	CMOS	Global	20	2.5 x 2.5	1
a2A4504-18um/ucBAS	IMX541	4504 x 4504	20.2	CMOS	Global	18	2.74 x 2.74	1.1
a2A5328-15um/ucBAS	IMX540	5328 x 4608	24.4	CMOS	Global	15	2.74 x 2.74	1.2
a2A5060-15um/ucBAS	E2525A	5060 x 5060	25	CMOS	Global	15	2.5 x 2.5	1.1
★ a2A2464-77um/ucBAS	OG05C	2448 x 2048	5	CMOS	Global	77	3.45 x 3.45	2/3
ace 2 Pro PGI BEYOND								
a2A1920-160um/ucPRO	IMX392	1920 x 1200	2.3	CMOS	Global	160 ¹	3.45 x 3.45	1/2.3
a2A2048-114um/ucPRO	IMX900	2048 x 1536	3.2	CMOS	Global	114 ¹	2.25 x 2.25	1/3.1
a2A2590-60um/ucPRO	IMX334ROI	2592 x 1944	5	CMOS	Rolling	60 ¹	2.0 x 2.0	1/2.8
a2A2448-75um/ucPRO	IMX547	2448 x 2048	5	CMOS	Global	75 ¹	2.74 x 2.74	1/1.8
a2A2600-64um/ucPRO	GMAX2505	2600 x 2160	5.6	CMOS	Global	64 ¹	2.5 x 2.5	1/2
a2A2840-48um/ucPRO	IMX546	2840 x 2840	8	CMOS	Global	48 ¹	2.74 x 2.74	2/3
a2A3840-45um/ucPRO	IMX334	3840 x 2160	8.3	CMOS	Rolling	45 ¹	2.0 x 2.0	1/1.8
a2A4200-40um/ucPRO	GMAX2509	4200 x 2160	9.1	CMOS	Global	40 ¹	2.5 x 2.5	2/3
a2A4096-30um/ucPRO	IMX545	4096 x 3000	12.3	CMOS	Global	30 ¹	2.74 x 2.74	1/1.1
a2A3536-31um/ucPRO	IMX676	3536 x 3536	12.5	CMOS	Rolling	31 ¹	2 x 2	1/1.6
a2A5320-23um/ucPRO	IMX542	5320 x 3032	16.1	CMOS	Global	23 ¹	2.74 x 2.74	1.1
a2A4508-20um/ucPRO	GMAX2518	4508 x 4096	18	CMOS	Global	20 ¹	2.5 x 2.5	1
a2A4504-18um/ucPRO	IMX541	4504 x 4504	20.2	CMOS	Global	18 ¹	2.74 x 2.74	1.1
a2A5328-15um/ucPRO	IMX540	5328 x 4608	24.4	CMOS	Global	15 ¹	2.74 x 2.74	1.2
★ a2A2464-77um/ucPRO	OG05C	2448 x 2048	5	CMOS	Global	77 ¹	3.45 x 3.45	2/3

¹ Higher frame rates possible with Compression Beyond. Please refer to our website baslerweb.com/ace2 for detailed information.

ace 2 CXP-12

Product Group Specifications

Interface	CoaXPRESS (CXP-12)
Housing Size [L × W × H]	42.8 mm × 29 mm × 29 mm
Housing Temperature During Operation	0 °C – 50 °C
Typical Weight	76 g
Lens Mount	C-mount
Power Supply	PoCXP
Digital I/O	1 opto-isolated input + 2 GPIO
Synchronization	Via hardware trigger, via software trigger, or free-run
Exposure Control	Via hardware trigger or programmable via the camera API
Conformity	CE (incl. RoHS), FCC, KC, UKCA, EAC, CoaXPRESS 2.0, GenICam, IP30, UL
Driver	pylon Software Suite
Operating System	Windows, Linux (64-Bit)

Camera Model	Sensor	Resolution [H×V pixels]	Resolution [MP]	Sensor Type	Shutter	Frame Rate [fps]	Pixel Size [μm ²]	Optical Size ["]
ace 2								
a2A2448-120cm/cc	IMX547	2448 × 2048	5	CMOS	Global	122	2.74 × 2.74	1/1.8
a2A2448-210cm/cc	IMX537	2448 × 2048	5	CMOS	Global	212	2.74 × 2.74	1/1.8
a2A2840-86cm/cc	IMX546	2840 × 2840	8	CMOS	Global	86	2.74 × 2.74	2/3
a2A4096-67cm/cc	IMX545	4096 × 3000	12	CMOS	Global	67	2.74 × 2.74	1/1.1
a2A5320-52cm/cc	IMX542	5320 × 3032	16.1	CMOS	Global	52	2.74 × 2.74	1.1
a2A4504-42cm/cc	IMX541	4504 × 4504	20.2	CMOS	Global	42	2.74 × 2.74	1.1
a2A5328-35cm/cc	IMX540	5328 × 4608	24.4	CMOS	Global	35	2.74 × 2.74	1.2
a2A5060-35cm/cc	E2525A	5060 × 5060	25	CMOS	Global	35	2.5 × 2.5	1.1

Basler ace 2 GMSL

Get a complete and simple solution including camera and components

Discover Basler's vision system based on the Gigabit Multimedia Serial Link (GMSL™) embedded interface that is characterized by its ease of use. With all necessary hardware and software components available from a single source, you can easily build a complete GMSL vision system for your embedded application with a NVIDIA platform.



Get a vision system for your embedded application

Equip your NVIDIA® Jetson Orin™-based application with vision technology



Find your complete solution

All components are fully coordinated and from a single source



Benefit from industrial cameras


GenICam-compatible GMSL cameras reduce integration and maintenance effort



Simply put your system into operation

Software packages for partner IPCs to easily integrate the vision system into your application

More information: baslerweb.com/gmsl



ace 2 GMSL



Product Group Specifications

Interface	GMSL2
Housing Size [L × W × H]	42.8 mm × 29 mm × 29 mm
Housing Temperature During Operation	-10 °C – 60 °C
Typical Weight	85 g
Lens Mount	C-mount
Power Supply	Power over Coax (PoC)
Digital I/O	1 opto-isolated input + 2 GPIO
Synchronization	Via hardware trigger, via software trigger, or free-run
Exposure Control	Via hardware trigger or programmable via the camera API
Conformity	CE (incl. RoHS), FCC, KC, UKCA, GenICam, IP30, UL
Driver	pylon Software Suite plus host system-specific Camera Enablement Packages
Operating System	Linux ARM

Camera Model	Sensor	Resolution [H×V pixels]	Resolution [MP]	Sensor Type	Shutter	Frame Rate [fps]	Pixel Size [µm²]	Optical Size ["]
ace 2								
★ a2A1920-168mgm/mgc	IMX392	1920 × 1200	2.3	CMOS	Global	168	3.45 × 3.45	1/2.3
★ a2A2448-90mgm/mgc	IMX547	2448 × 2048	5	CMOS	Global	90	2.74 × 2.74	1/1.8
★ a2A3536-37mgm/mgc	IMX676	3536 × 3536	12.5	CMOS	Rolling	37	2 × 2	1/1.8
★ a2A5320-29mgm/mgc	IMX542	5320 × 3032	16.1	CMOS	Global	29	2.74 × 2.74	1.1
★ a2A5328-19mgm/mgc	IMX540	5328 × 4608	24.4	CMOS	Global	19	2.74 × 2.74	1.2
🕒 a2A2048-114mgm/mgc	IMX900	2048 × 1536	3.2	CMOS	Global	114	2.25 × 2.25	1/3.1
🕒 a2A2840-57mgm/mgc	IMX546	2840 × 2840	8	CMOS	Global	57	2.74 × 2.74	2/3
🕒 a2A4096-38mgm/mgc	IMX545	4096 × 3000	12.3	CMOS	Global	38	2.74 × 2.74	1/1.1
🕒 a2A4504-23mgm/mgc	IMX541	4504 × 4504	20.2	CMOS	Global	23	2.74 × 2.74	1.1



The components for your complete solution

Our portfolio includes all components in different versions for guaranteed flexibility.

Coaxial cable with FAKRA plug

Most industrial PCs (IPCs) with a GMSL interface have a FAKRA socket, so our cables can be used flexibly.


- Coaxial cable with FAKRA plug connects ace 2 GMSL camera and IPC
- Stable image data transmission thanks to high electromagnetic compatibility
- Single-cable solution with Power over Coax (PoC)
- Optional: two-cable solution with coaxial cable for data transport and I/O cable for power supply and control of the camera I/O ports



Camera Enablement Packages for partner IPCs

When using the GMSL interface, the correct configuration between the camera and IPC is important. Camera Enablement Packages are IPC-specific software add-on packages that contain this configuration.

- Available for IPC models from various manufacturers such as Advantech Co, Lanner Inc, Neousys Technology, and Syslogic AG
- Enables plug-and-play connection between the vision system and your application
- Minimizes development and maintenance costs

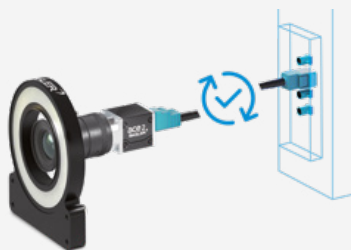

Lens and lighting

Complete your vision system with lenses and lighting from our extensive portfolio.

- Lenses for sensor resolutions up to 25 MP and sensor formats up to 1.1"
- Various lighting types in different sizes and light colors
- Flexible handling in continuous or trigger mode w/out external lighting controller
- Optional: combine with Basler Lighting Controller (SLP Controller) for simple lighting control



Basler ace 2 IP67

Get a complete IP67 solution consisting of camera and components

Basler's IP67 vision systems are designed to withstand challenging environments with dust, moisture and water. With all necessary components available from a single source, you can easily build a complete solution that fits your application and works reliably over time.



IP67

Vision system with Ingress Protection (IP) against dust (6) and water (7) for reliable operation in demanding environments



Reduce costs

Fully tested and certified IP67 system for a fair price matching highest image quality



Save time

Efficient system configuration leads to quick and easy integration into your application



Find your complete solution

All components are fully coordinated and from a single source

More information: baslerweb.com/ip67



ace 2 IP67

Product Group Specifications

Interface	Fast Ethernet (100 Mbit/s) or GigE (1000 Mbit/s)
Housing Size [L × W × H]	55.5 mm × 31 mm × 31 mm
Housing Protection Class	IP65/67 (with lens housing and cable)
Housing Temperature During Operation	-10 °C – 60 °C
Typical Weight	72 g
Lens Mount	C-mount
Power Supply	Power over Ethernet (IEEE 802.3af) or 12-24 VDC (+/- 10 %)
Digital I/O	1 opto-isolated input + 2 GPIO
Synchronization	Via hardware trigger, via software trigger or free-run
Exposure Control	Via hardware trigger or programmable via the camera API
Conformity	CE (incl. RoHS), EAC, FCC, GenICam, GigE Vision 2.0, IP65, IP67, KC, RoHS, UKCA, UL (in preparation)
Driver	pylon Software Suite or 3rd party GigE Vision Software
Operating System	Windows, Linux, macOS, Android

Camera Model	Sensor	Resolution [H×V pixels]	Resolution [MP]	Sensor Type	Shutter	Frame Rate [fps]	Pixel Size [µm ²]	Optical Size ["]
ace 2 IP67								
a2A1920-51gm/gcIP67	IMX392	1920 × 1200	2.3	CMOS	Global	51	3.45 × 3.45	1/2.3
a2A2448-23gm/gcIP67	IMX547	2448 × 2048	5	CMOS	Global	23	2.74 × 2.74	1/1.8
a2A2840-14gm/gcIP67	IMX546	2840 × 2840	8.1	CMOS	Global	14	2.74 × 2.74	2/3
a2A4096-9gm/gcIP67	IMX545	4096 × 3000	12.3	CMOS	Global	9	2.74 × 2.74	1/1.1
a2A5320-7gm/gcIP67	IMX542	5320 × 3032	16.1	CMOS	Global	7	2.74 × 2.74	1.1
a2A4504-5gm/gcIP67	IMX541	4504 × 4504	20.2	CMOS	Global	5	2.74 × 2.74	1.1
a2A5328-4gm/gcIP67	IMX540	5328 × 4608	24.4	CMOS	Global	4	2.74 × 2.74	1.2



The components for your complete solution

Our portfolio includes all components in different versions for guaranteed flexibility.

Lens and lens housing

Choose a lens according to your requirements. Then select the right lens housing to protect it from dust and water.

- Lenses for sensor resolutions up to 25 MP and sensor formats up to 1.2"
- Lens housing suitable to protect the lens from dust and water (IP67 standard)



IP67 lighting

Ensure high image quality under demanding conditions with homogeneous lighting.

- IP67 protection with mounted cable
- LED ring and bar lighting
- Flexible handling in continuous or trigger mode w/out external lighting controller
- Optional: combine with Basler Lighting Controller (SLP) for simple lighting control



Cables

Get cables with special connectors to protect the IP67 camera from dust and water.

- GigE data cable for stable data transfer: Screwable M12 8-pin connector (camera) and RJ-45 connector (host)
- I/O cable for controlling the camera I/O ports: Screwable M8 6-pin connector (camera) and one open end



Basler ace

Small, affordable, and powerful

With the Basler ace, you can rely on a renowned camera series with an unbeatable price/performance ratio. Various resolutions and speeds, diverse interfaces, extensive features, and a choice of sensors from all the leading manufacturers make the ace the perfect choice for a wide range of machine vision applications.



Small and compact

Thanks to the housing of 29 mm x 29 mm as well as 30 mm x 40 mm usable for numerous vision applications



Firmware features

With PGI for highest image quality at full camera speed without additional processor load



Broad sensor portfolio

Wide range of CCD, CMOS and NIR sensors from renowned manufacturers



Interface diversity

USB 3.0, GigE or Camera Link: Choose the right interface for your application

More information: baslerweb.com/ace



ace USB


Product Group Specifications

Interface	USB 3.0
Housing Size [L x W x H]	ace Classic/ace U: 29.3 mm x 29 mm x 29 mm, ace L: 35.8 mm x 40 mm x 30 mm
Housing Temperature During Operation	0 °C – 50 °C ¹
Typical Weight	< 80 g
Lens Mount	ace Classic: C- or CS-mount (depending on model), ace U/ace L: C-mount
Power Supply	Via USB 3.0 interface
Digital I/O	1 opto-isolated input + 1 opto-isolated output + 2 Fast-GPIO (configurable as In/Out)
Power Suspend Mode	Yes, less than 0.02 W, configurable
Synchronization	Via hardware trigger, via software trigger or free-run
Exposure Control	Via hardware trigger ² or programmable via the camera API
Conformity	CE, RoHS, GenICam, USB3 Vision, IP30, UL, FCC, KC, EAC, UKCA
Driver	pylon Software Suite or 3rd party USB3 Vision Software
Operating System	Windows, Linux, macOS, Android

¹ 0 °C – 60 °C for acA2040-90um/uc, acA2040-90umNIR.

² Not applicable for ace models with sensors of the MT line from onsemi.

Camera Model	Sensor	Resolution [HxV pixels]	Resolution [MP]	Sensor Type	Shutter	Frame Rate [fps]	Pixel Size [µm ²]	Optical Size ["]
ace Classic								
acA1920-25um/uc	MT9P031	1920 x 1080	2	CMOS	Rolling	26	2.2 x 2.2	1/3.7
acA2000-165um/uc	CMV2000	2048 x 1088	2	CMOS	Global	165	5.5 x 5.5	2/3
acA2040-90um/uc	CMV4000	2048 x 2048	4	CMOS	Global	90	5.5 x 5.5	1
acA2040-90umNIR	CMV4000 NIR-enhanced	2048 x 2048	4	CMOS	Global	90	5.5 x 5.5	1
acA2500-14um/uc	MT9P031	2592 x 1944	5	CMOS	Rolling	14	2.2 x 2.2	1/2.5
acA3800-14um/uc	MT9J003	3840 x 2748	10	CMOS	Rolling	14	1.67 x 1.67	1/2.3

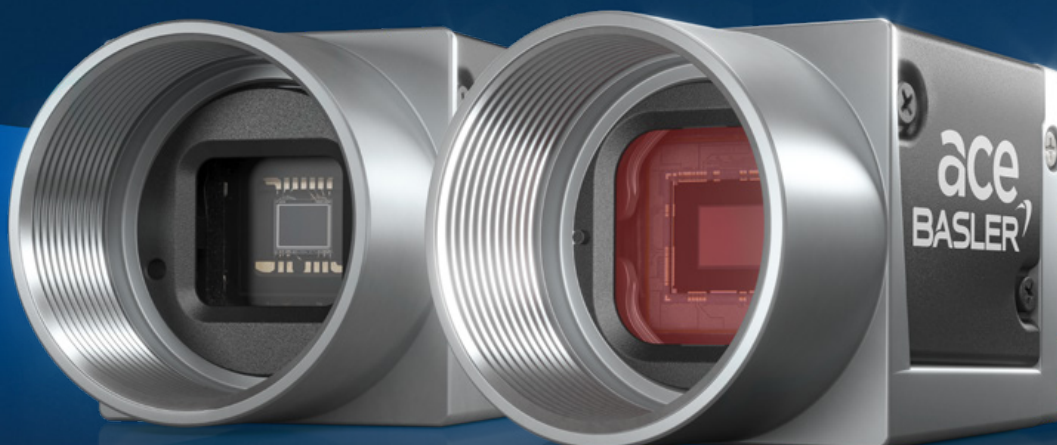

Camera Model	Sensor	Resolution [H×V pixels]	Resolution [MP]	Sensor Type	Shutter	Frame Rate [fps]	Pixel Size [μm ²]	Optical Size ["]
ace U PGI								
acA640-750um/uc	PYTHON 300	640 × 480	VGA	CMOS	Global	751	4.8 × 4.8	1/4
acA720-520um/uc	IMX287	720 × 540	VGA	CMOS	Global	525	6.9 × 6.9	1/2.9
acA800-510um/uc	PYTHON 500	800 × 600	CCIR	CMOS	Global	511	4.8 × 4.8	1/3.6
acA1300-200um/uc	PYTHON 1300	1280 × 1024	1.3	CMOS	Global	203	4.8 × 4.8	1/2
acA1440-220um/uc	IMX273	1440 × 1080	1.6	CMOS	Global	227	3.45 × 3.45	1/2.9
acA1920-40um/uc	IMX249	1920 × 1200	2.3	CMOS	Global	41	5.86 × 5.86	1/1.2
acA1920-150um/uc	PYTHON 2000	1920 × 1200	2.3	CMOS	Global	150	4.8 × 4.8	2/3
acA1920-155um/uc	IMX174	1920 × 1200	2.3	CMOS	Global	164	5.86 × 5.86	1/1.2
acA2040-55um/uc	IMX265	2048 × 1536	3	CMOS	Global	55	3.45 × 3.45	1/1.8
acA2040-120um/uc	IMX252	2048 × 1536	3	CMOS	Global	120	3.45 × 3.45	1/1.8
acA2440-35um/uc	IMX264	2448 × 2048	5	CMOS	Global	35	3.45 × 3.45	2/3
acA2440-75um/uc	IMX250	2448 × 2048	5	CMOS	Global	75	3.45 × 3.45	2/3
acA2500-60um/uc	PYTHON 5000	2592 × 2048	5	CMOS	Global	60	4.8 × 4.8	1
acA3088-57um/uc	IMX178	3088 × 2064	6	CMOS	Rolling	59	2.4 × 2.4	1/1.8
acA4024-29um/uc	IMX226	4024 × 3036	12	CMOS	Rolling	31	1.85 × 1.85	1/1.7
acA5472-17um/uc	IMX183	5472 × 3648	20	CMOS	Rolling	17	2.4 × 2.4	1
ace L PGI								
acA4096-30um/uc	IMX267	4096 × 2168	9	CMOS	Global	32	3.45 × 3.45	1
acA4096-40um/uc	IMX255	4096 × 2168	9	CMOS	Global	42	3.45 × 3.45	1
acA4112-20um/uc	IMX304	4096 × 3000	12	CMOS	Global	23	3.45 × 3.45	1.1
acA4112-30um/uc	IMX253	4096 × 3000	12	CMOS	Global	30	3.45 × 3.45	1.1

ace GigE

Product Group Specifications

Interface	Fast Ethernet (100 Mbit/s) or GigE (1000 Mbit/s)
Housing Size [L × W × H]	ace Classic/ace U: 42 mm × 29 mm × 29 mm, ace L: 50 mm × 40 mm × 30 mm
Housing Temperature During Operation	0 °C – 50 °C
Typical Weight	< 90 g
Lens Mount	ace Classic: C- or CS-mount (depending on model), ace U/ace L: C-mount
Power Supply	ace Classic: Power over Ethernet (IEEE 802.3af) or 12 VDC (+/- 10%) ace U/ace L: Power over Ethernet (IEEE 802.3af) or 12-24 VDC (+/- 10%) ¹
Digital I/O	ace Classic: 1 opto-isolated input + 1 opto-isolated output ace U/ace L: 1 opto-isolated input + 1 opto-isolated output + 1 GPIO
Synchronization	Via hardware trigger, via software trigger or free-run
Exposure Control	Via hardware trigger ² or programmable via the camera API
Conformity	CE, RoHS, GenICam, GigE Vision, IP30, UL, FCC, IEEE 802.3af (PoE), KC, EAC, UKCA
Driver	pylon Software Suite or 3rd party GigE Vision Software
Operating System	Windows, Linux, macOS

¹ Also applies to ace Classic models acA3800-10gm/gc, acA1280-60gm/gc, acA1300-60gm/gc, acA1300-60gmNIR, acA1600-60gm/gc.

² Not applicable for acA1280-60gm/gc, acA1300-60gm/gc, acA1600-60gm/gc, acA3800-10gm/gc.

Camera Model	Sensor	Resolution [H×V pixels]	Resolution [MP]	Sensor Type	Shutter	Frame Rate [fps]	Pixel Size [µm ²]	Optical Size ["]
ace Classic								
acA1280-60gm/gc	EV76C560	1282 × 1026	1.3	CMOS	Rolling	60	5.3 × 5.3	1/1.8
acA1300-60gm/gc	EV76C560	1282 × 1026	1.3	CMOS	Global & Rolling	60	5.3 × 5.3	1/1.8
acA1300-60gmNIR	EV76C661	1282 × 1026	1.3	CMOS	Global & Rolling	60	5.3 × 5.3	1/1.8
acA1600-60gm/gc	EV76C570	1602 × 1202	2	CMOS	Global & Rolling	60	4.5 × 4.5	1/1.8
acA1920-25gm/gc	MT9P031	1920 × 1080	2	CMOS	Rolling	25	2.2 × 2.2	1/3.7
acA2000-50gm/gc	CMV2000	2048 × 1088	2	CMOS	Global	50	5.5 × 5.5	2/3
acA2040-25gm/gc	CMV4000	2048 × 2048	4	CMOS	Global	25	5.5 × 5.5	1
acA2040-25gmNIR	CMV4000 NIR-enhanced	2048 × 2048	4	CMOS	Global	25	5.5 × 5.5	1
acA2500-14gm/gc	MT9P031	2592 × 1944	5	CMOS	Rolling	14	2.2 × 2.2	1/2.5
acA3800-10gm/gc	MT9J003	3840 × 2748	10	CMOS	Rolling	10	1.67 × 1.67	1/2.3
ace U PGI								
acA640-121gm	ICX618 Replacement	659 × 494	VGA	CMOS	Global	134	5.6 × 5.6	1/4
acA640-300gm/gc	PYTHON 300	640 × 480	VGA	CMOS	Global	376	4.8 × 4.8	1/4
acA720-290gm/gc	IMX287	720 × 540	VGA	CMOS	Global	291	6.9 × 6.9	1/2.9
acA800-200gm/gc	PYTHON 500	800 × 600	CCIR	CMOS	Global	240	4.8 × 4.8	1/3.6
acA1300-75gm/gc	PYTHON 1300	1280 × 1024	1.3	CMOS	Global	88	4.8 × 4.8	1/2
acA1440-73gm/gc	IMX273	1440 × 1080	1.6	CMOS	Global	73	3.45 × 3.45	1/2.9
acA1920-40gm/gc	IMX249	1920 × 1200	2.3	CMOS	Global	42	5.86 × 5.86	1/1.2
acA1920-48gm/gc	PYTHON 2000	1920 × 1200	2.3	CMOS	Global	50	4.8 × 4.8	2/3
acA1920-50gm/gc	IMX174	1920 × 1200	2.3	CMOS	Global	50	5.86 × 5.86	1/1.2
acA2040-35gm/gc	IMX265	2048 × 1536	3	CMOS	Global	36	3.45 × 3.45	1/1.8
acA2440-20gm/gc	IMX264	2448 × 2048	5	CMOS	Global	23	3.45 × 3.45	2/3
acA2500-20gm/gc	PYTHON 5000	2592 × 2048	5	CMOS	Global	21	4.8 × 4.8	1
acA3088-16gm/gc	IMX178	3088 × 2064	6	CMOS	Rolling	16	2.4 × 2.4	1/1.8
acA4024-8gm/gc	IMX226	4024 × 3036	12	CMOS	Rolling	8	1.85 × 1.85	1/1.7
acA5472-5gm/gc	IMX183	5472 × 3648	20	CMOS	Rolling	5	2.4 × 2.4	1
ace L PGI								
acA4096-11gm/gc	IMX267	4096 × 2160	9	CMOS	Global	12	3.45 × 3.45	1
acA4112-8gm/gc	IMX304	4096 × 3000	12	CMOS	Global	8	3.45 × 3.45	1.1

ace Camera Link

Product Group Specifications

Interface	Camera Link (base, medium or full)
Housing Size [L × W × H]	42 mm × 29 mm × 29 mm, ace
Housing Temperature During Operation	0 °C – 50 °C
Typical Weight	≈ 100 g
Lens Mount	C-mount
Power Supply	Power over Camera Link (PoCL) or 12VDC (+/- 10%)
Digital I/O	1 opto-isolated input or output (GPIO)
Synchronization	Via hardware trigger, via software trigger or free-run
Exposure Control	Trigger width or timed
Conformity	CE, RoHS, GenICam, Camera Link, IP30, FCC, KC, EAC, UKCA
Driver	pylon Software Suite or 3rd party Camera Link Software
Operating System	Windows, Linux, macOS, Android

Camera Model	Sensor	Resolution [H×V pixels]	Resolution [MP]	Sensor Type	Shutter	Frame Rate [fps]	Pixel Size [μm ²]	Optical Size ["]
ace Classic								
acA2000-340km/kc	CMV2000	2048 × 1088	2	CMOS	Global	340	5.5 × 5.5	2/3
acA2040-180km/kc	CMV4000	2048 × 2048	4	CMOS	Global	180	5.5 × 5.5	1
acA2040-180kmNIR	CMV4000	2048 × 2048	4	CMOS	Global	180	5.5 × 5.5	1

Basler MED ace For Medical & Life Sciences

Use MED ace cameras for your application in medicine, medical technology and life sciences. The cameras convince with best image quality, reliability and long-term availability. They also have special MED feature sets.



CMOS sensors

CMOS sensors from Sony and onsemi with up to 164 fps frame rate and 20 MP resolution



Dust Protection*

Sensor room sealing, clean room production and inspection for dust and other particles



MED Feature Sets

Combine powerful hardware, firmware and software features



Interface diversity

Plug-and-play USB 3.0 or GigE interface

More information: baslerweb.com/MEDace




MED ace

Product Group Specifications


Interface	USB 3.0	GigE
Housing Size [L x W x H]	MED ace U: 29.3 mm x 29 mm x 29 mm MED ace L: 35.8 mm x 40 mm x 30 mm	42 mm x 29 mm x 29 mm
Housing Temperature During Operation	0 °C – 50 °C	0 °C – 50 °C
Typical Weight	80 g	90 g
Lens Mount	C-mount	C-mount
Power Supply	Via USB 3.0 interface	Power over Ethernet (IEEE 802.3af) or 12-24 VDC (+/- 10 %)
Digital I/O	1 opto-isolated input + 1 opto-isolated output + 2 Fast-GPIO (configurable as In/Out)	1 opto-isolated input + 1 opto-isolated output + 1 GPIO (configurable as In/Out)
Synchronization	Via hardware trigger, via software trigger or free-run	Via hardware trigger, via Ethernet connection or free-run
Exposure Control	Via hardware trigger or programmable via the camera API	Via hardware trigger or programmable via the camera API
Conformity	ISO 13485:2016, CE, RoHS, GenICam, USB3 Vision, IP30, UL, FCC Class B, EMV Class B, KC ¹ , EAC ¹ , UKCA	ISO 13485:2016, CE, RoHS, GenICam, GigE Vision, IP30, IEEE 802.3af (PoE), UL, FCC Class B, KC, EAC ¹
Driver	pylon Software Suite or 3rd party USB3 Vision Software	pylon Software Suite or 3rd party GigE Vision Software
Operating System	Windows, Linux, macOS, Android	Windows, Linux, macOS, Android

¹ Only for selected models, please refer to our website baslerweb.com/MEDace for detailed information.

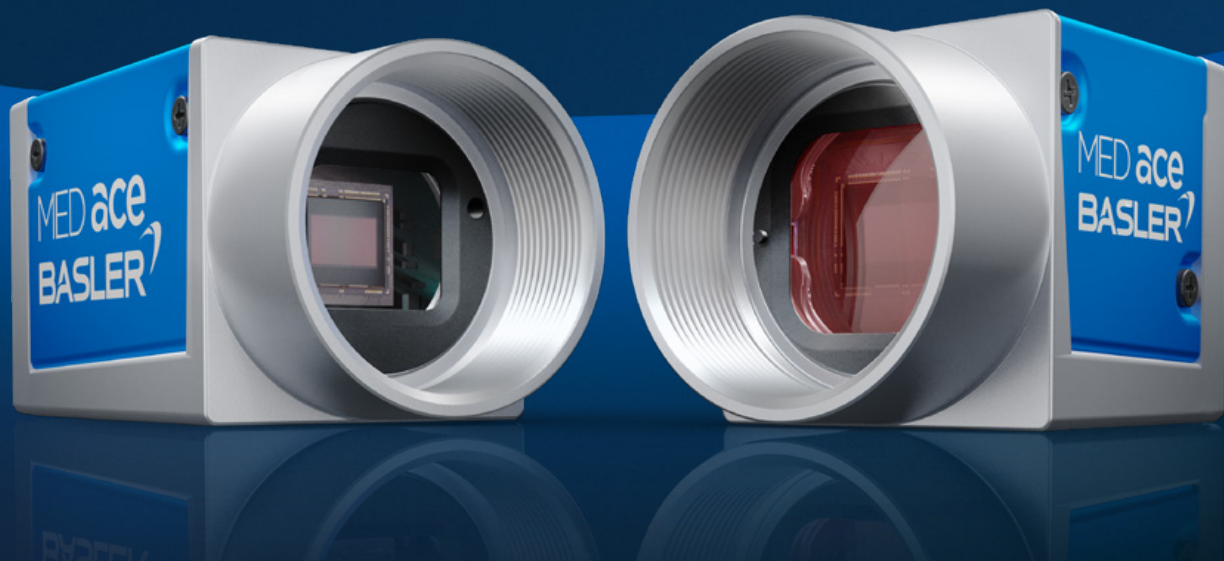


Camera Model	Sensor	Resolution [H×V pixels]	Resolution [MP]	Sensor Type	Shutter	Frame Rate [fps]	Pixel Size [μm ²]	Optical Size ["]
MED ace U USB 3.0 PGI								
MED ace 2.3 MP 41 m/c	IMX249	1920 × 1200	2.3	CMOS	Global	41	5.86 × 5.86	1/1.2
MED ace 2.3 MP 164 m/c	IMX174	1920 × 1200	2.3	CMOS	Global	164	5.86 × 5.86	1/1.2
MED ace 5.1 MP 35 m/c	IMX264	2448 × 2048	5	CMOS	Global	35	3.45 × 3.45	2/3
MED ace 5.1 MP 75 m/c	IMX250	2448 × 2048	5	CMOS	Global	75	3.45 × 3.45	2/3
MED ace 6.4 MP 59 m/c	IMX178	3088 × 2064	6.4	CMOS	Rolling	59	2.4 × 2.4	1/1.8
MED ace 20.0 MP 17 m/c	IMX183	5472 × 3648	20	CMOS	Rolling	17	2.4 × 2.4	1
MED ace L USB 3.0 PGI								
MED ace 8.9 MP 32 m/c	IMX267	4096 × 2160	9	CMOS	Global	32	3.45 × 3.45	1
MED ace 8.9 MP 42 m/c	IMX255	4096 × 2160	9	CMOS	Global	42	3.45 × 3.45	1
MED ace 12.3 MP 23 m/c	IMX304	4096 × 3000	12	CMOS	Global	23	3.45 × 3.45	1.1
MED ace 12.3 MP 30 m/c	IMX253	4096 × 3000	12	CMOS	Global	30	3.45 × 3.45	1.1
MED ace GigE PGI								
MED ace 5.3 MP 20 m/c	PYTHON 5000	2590 × 2048	5	CMOS	Global	21	4.8 × 4.8	1

Basler MED Feature Sets

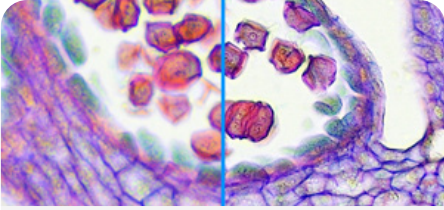


Brilliant Image

You get best quality pictures from the first time you activate the camera because MED ace cameras have optimal wake-up settings, Basler's PGI algorithm and auto-image functions.

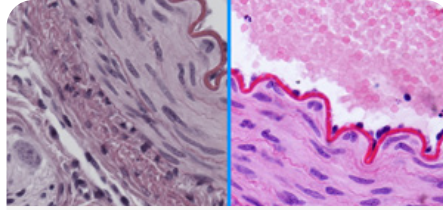


Perfect Color

Design the color reproduction of your picture yourself: e.g., by adjusting the settings for hue, saturation, brightness and contrast over the entire picture as well as for individual colors.

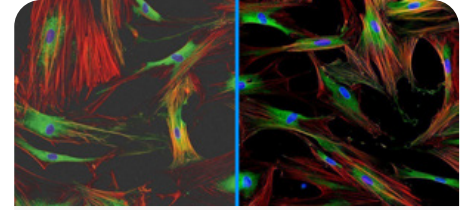

Low Light Imaging

Thanks to modern CMOS sensor technology and our mode for long exposure times, you produce best quality images even in low light.



Dust Protection*

We ensure high cleanliness by sealing the sensor room, producing the MED ace separately in a clean-room and strictly testing selected components for dust and other particles during assembly.



Industrial Excellence

Our tested high quality cameras together with our pylon software package, our extended camera control functions and our individual customer support enable easy camera integration.



High Speed

Global shutter, CMOS sensor technology and USB3 Vision interface technology enable frame rates of up to 164 frames per second with the MED ace.

More information: baslerweb.com/med-feature-sets

Camera	Brilliant Image	Perfect Color ¹	Low Light Imaging	Dust Protection ⁺	Industrial Excellence	High Speed
MED ace 2.3 MP 41 m/c	●	●		● ¹	●	
MED ace 2.3 MP 164 m/c	●	●	●	● ¹	●	●
MED ace 5.1 MP 35 m/c	●	●		● ¹	●	
MED ace 5.1 MP 75 m/c	●	●	●	● ¹	●	●
MED ace 5.3 MP 20 m/c	●	●			●	
MED ace 6.4 MP 59 m/c	●	●		●	●	
MED ace 8.9 MP 32 m/c	●	●			●	
MED ace 8.9 MP 42 m/c	●	●	●		●	
MED ace 12.3 MP 23 m/c	●	●			●	
MED ace 12.3 MP 30 m/c	●	●	●		●	
MED ace 20 MP 17 m/c	●	●		●	●	

¹ This MED Feature Set is available for color cameras only.

Basler boost

CoaXPress 2.0 for high bandwidths and large resolution

The boost series features modern, high-performance cameras that deliver excellent image quality – even at high data rates – thanks to CoaXPress 2.0 and modern CMOS sensors. Combining these cameras with our coordinated accessories forms the perfect system for applications with high requirements.



High bandwidths

Bandwidth up to 50 Gbps over longer distances and in real time



Latest CMOS sensors

Latest global shutter CMOS sensors for best inspection results



High resolutions

Up to 127 MP for capturing the smallest details



Sensor diversity

Broad portfolio with CMOS sensors from Gpixel, Sony and onsemi for your individual requirement

More information: baslerweb.com/boost



	boost R	boost V
Product Group Specifications		
Interface	CoaXPress 2.0 (CXP-12)	
Housing Size [L x W x H]	45 mm x 80 mm x 80 mm	66.6 mm x 65 mm x 65 mm
Housing Temperature During Operation	0 °C – 50 °C	max. 70 °C
Typical Weight	400 - 525 g	400 g
Lens Mount	Flexible mount concept (adapters available for C-mount, F-mount, M42 x 0.75 and M42 x 1)	Flexible mount concept (adapters available for C-mount, F-mount, M58 x 0.75 and M42 x 1)
Power Supply	PoCXP or 24 VDC	
Digital I/O	1/2 inputs, 2 GPIO	1/2 inputs, 1 GPIO
Synchronization	Via hardware trigger, via software trigger, or free-run	Via hardware trigger, via software trigger
Exposure Control	Via hardware trigger or programmable via the camera API	
Conformity	RoHS, CE, GenICam, KC, UL, EAC ¹ , CoaXPress 2.0	RoHS, CE, GenICam, KC, UKCA, FCC, CoaXPress 2.0
Driver	pylon Software Suite	
Operating System	Windows, Linux (64-Bit)	

¹ Only for selected models, please refer to our website baslerweb.com/boost for detailed information.



Camera Model	Sensor	Resolution [H×V pixels]	Resolution [MP]	Sensor Type	Shutter	Frame Rate [fps]	Pixel Size [μm ²]	Optical Size ["]
boost R								
boA1936-400cm/cc	IMX421	1936 × 1464	3	CMOS	Global	400	4.5 × 4.5	2/3
boA2448-250cm/cc	IMX537	2448 × 2048	5	CMOS	Global	250	2.74 × 2.74	1/1.8
boA2832-190cm/cc	IMX536	2832 × 2840	8	CMOS	Global	190	2.74 × 2.74	2/3
boA4096-93cm/cc	IMX255	4096 × 2168	9	CMOS	Global	93	3.45 × 3.45	1
boA4096-180cm/cc	IMX535	4096 × 3000	12	CMOS	Global	180	2.74 × 2.74	1/1.1
boA4112-68cm/cc	IMX253	4096 × 3000	12	CMOS	Global	68	3.45 × 3.45	1.1
boA5320-150cm/cc	IMX532	5320 × 3032	16.1	CMOS	Global	150	2.74 × 2.74	1.1
boA4504-100cm/cc	IMX531	4504 × 4504	20	CMOS	Global	100	2.74 × 2.74	1.1
boA4500-45cm/cc	XGS 20000	4500 × 4500	20	CMOS	Global	45	3.2 × 3.2	1.3
boA5328-100cm/cc	IMX530	5328 × 4608	24.4	CMOS	Global	100	2.74 × 2.74	1.2
boA6500-36cm/cc	XGS 32000	6580 × 4935	32.4	CMOS	Global	35	3.2 × 3.2	APS-C
boA8100-16cm/cc	XGS 45000	8192 × 5460	44.7	CMOS	Global	19	3.2 × 3.2	35 mm
boA13440-17cm	IMX661	13376 × 9528	127	CMOS	Global	17	3.45 × 3.45	3.6
boA13440-19ccCST	IMX661	13376 × 9528	127	CMOS	Global	19	3.45 × 3.45	3.6
boost V								
boA5120-230cm/cc	GSPRINT4521	5120 × 4096	21	CMOS	Global	230	4.5 × 4.5	APS-C
boA5120-150cm/cc	GMAX0505	5120 × 5120	25	CMOS	Global	150	2.5 × 2.5	1.1
boA9344-30cm/cc	GMAX3265	9344 × 7000	65	CMOS	Global	30	3.2 × 3.2	2.3
boA9344-70cm/cc	GMAX3265	9344 × 7000	65	CMOS	Global	70	3.2 × 3.2	2.3

Basler dart

Compact, board level camera with excellent image quality

Looking for a flexible camera for factory or embedded applications? The Basler dart – with its small design, low weight, low power consumption, and various mounting options – is the right choice for you.



Board level design

For flexible and optimal integrability in the system setup



Variety of mounting options

Bare board, S-mount, and CS-mount



Diverse sensor options

Resolutions from VGA to 13 MP and frame rates from 14 to 523 fps



Interface diversity

GigE, USB 3.0, and BCON for MIPI interface options

More information: baslerweb.com/dart




dart Classic, dart R, dart E

Product Group Specifications

Interface	BCON for MIPI (MIPI CSI-2), USB 3.0
Housing Size [W × H]	27 mm × 27 mm (bare board); 29 mm × 29 mm (other mount versions)
Camera Depth	5.3 mm – 8.0 mm (bare board); 18 mm – 19.9 mm (other mount versions)
Housing Temperature During Operation	0 °C – 50 °C
Typical Weight	5 g (bare board); 10 g -15 g (other mount versions)
Lens Mount	USB 3.0: bare board, S-mount or CS-mount BCON for MIPI: bare board or S-mount
Power Requirements	5V / 0.6 W – 2.0 W
Digital I/O	BCON for MIPI: 2 outputs/2 inputs, USB 3.0: 2 or 4 GPIO
Synchronization	Via hardware trigger, via software trigger, or free-run ¹
Exposure Control	Via hardware trigger or programmable via the camera API ¹
Conformity	CE, RoHS, GenICam, USB3 Vision, UL, FCC, KC ¹ , EAC ¹ , UKCA
Driver	pylon Software Suite
Operating System	Linux, Windows (USB 3.0 only), macOS (USB 3.0 only), Android (USB 3.0 only)

¹ Only for selected models, please refer to our website baslerweb.com/dart for detailed information.

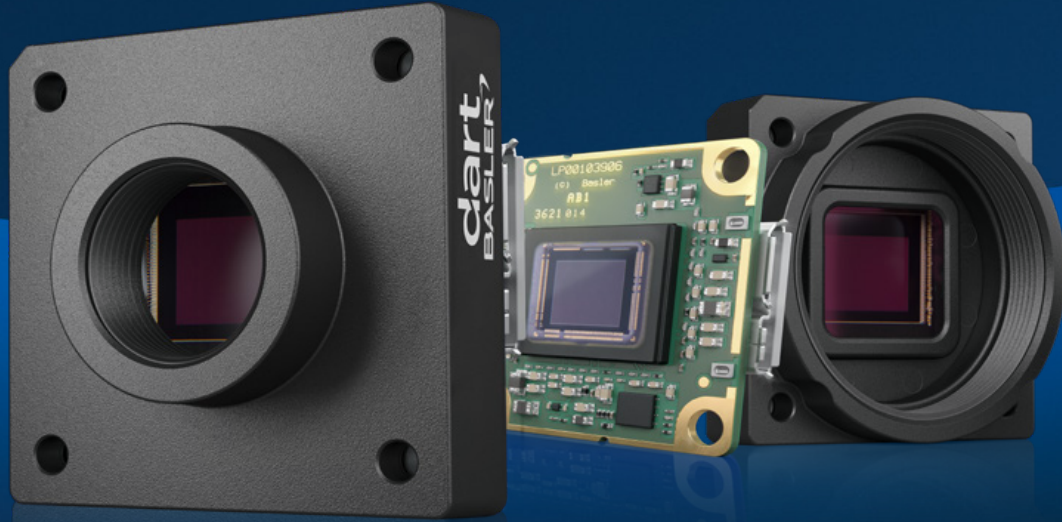

Camera Model	Sensor	Resolution [H×V pixels]	Resolution [MP]	Sensor Type	Shutter	Frame Rate [fps]	Pixel Size [μm ²]	Optical Size ["]
dart Classic USB 3.0 PGI								
daA1280-54um/uc	AR0134	1280 × 960	1.2	CMOS	Global	54	3.75 × 3.75	1/3
daA1600-60um/uc	EV76C570	1600 × 1200	2	CMOS	Global	60	4.5 × 4.5	1/1.8
daA1920-15um ¹	MT9P031	1920 × 1080	2	CMOS	Rolling	15	2.2 × 2.2	1/3.7
daA1920-30um/uc	MT9P031	1920 × 1080	2	CMOS	Rolling	30	2.2 × 2.2	1/3.7
daA2500-14um/uc	MT9P031	2592 × 1944	5	CMOS	Rolling	14	2.2 × 2.2	1/2.5
dart R USB 3.0 PGI								
daA720-520um/uc	IMX287	720 × 540	VGA	CMOS	Global	523	6.9 × 6.9	1/2.9
daA1440-220um/uc	IMX273	1440 × 1080	1.6	CMOS	Global	227	3.45 × 3.45	1/2.9
daA1920-160um/uc	IMX392	1920 × 1200	2.3	CMOS	Global	160	3.45 × 3.45	1/2.3
daA2448-70um/uc	IMX548	2448 × 2048	5	CMOS	Global	72	2.74 × 2.74	1/1.8
daA3840-45um/uc	IMX334	3840 × 2160	8.3	CMOS	Rolling Shutter	45	2 × 2	1/1.8

¹ Bare board only.

Camera Model	Sensor	Resolution [H×V pixels]	Resolution [MP]	Sensor Type	Shutter	Frame Rate [fps]	Pixel Size [μm ²]	Optical Size ["]
dart E BCON for MIPI PGI								
daA2500-60mc	AR0521	2560 × 1920	5	CMOS	Rolling	60	2.2 × 2.2	1/2.5
daA2500-60mci ¹	AR0521	2560 × 1920	5	CMOS	Rolling	60	2.2 × 2.2	1/2.5
daA3840-30mc	AR0821	3840 × 2160	8	CMOS	Rolling	30	2.1 × 2.1	1/1.8
daA4200-30mci ¹	AR1335	4208 × 3120	13	CMOS	Rolling	30	1.1 × 1.1	1/3

¹ Internal ISP.

Basler dart M

A camera based on the modular principle

The dart M camera is a modular, board level camera with GigE interface that adapts to the installation situation of your application: based on the camera module, you can put together a modular camera that meets your requirements and obtain an easy-to-integrate, cost-efficient camera. The sensor on the camera module, distance between sensor and Ethernet socket, power supply, and lens mount can all be flexibly selected.


Modular
Camera configuration according to individual requirements

GigE interface
Enables long cable lengths and multi-camera setups


Compact and lightweight
Board level design offers small size and reduced weight

Top price/performance ratio
Maximum flexibility and quality at a low price

More information: baslerweb.com/dart-m




Camera Model	Sensor	Resolution [H×V pixels]	Resolution [MP]	Sensor Type	Shutter	Frame Rate [fps]	Pixel Size [μm ²]	Optical Size ["]
dart M GigE								
dmA720-290gm/gc	IMX287	720 × 540	VGA	CMOS	Global	290	6.9 × 6.9	1/2.9
dmA1440-73gm/gc	IMX273	1440 × 1080	1.6	CMOS	Global	73	3.45 × 3.45	1/2.9
dmA1920-51gm/gc	IMX392	1920 × 1200	2.3	CMOS	Global	51	3.45 × 3.45	1/2.3
dmA2048-37gm/gc	IMX900	2048 × 1536	3.2	CMOS	Global	37	2.25 × 2.25	1/3.1
dmA2448-23gm/gc	IMX547	2448 × 2048	5.1	CMOS	Global	23	2.74 × 2.74	1/1.8
dmA2840-14gm/gc	IMX546	2840 × 2840	8.1	CMOS	Global	14	2.74 × 2.74	2/3
dmA4096-9gm/gc	IMX545	4096 × 3000	12.3	CMOS	Global	9	2.74 × 2.74	1/1.1
dmA3536-9gm/gc	IMX676	3536 × 3536	12.5	CMOS	Rolling	9	2 × 2	1/1.6

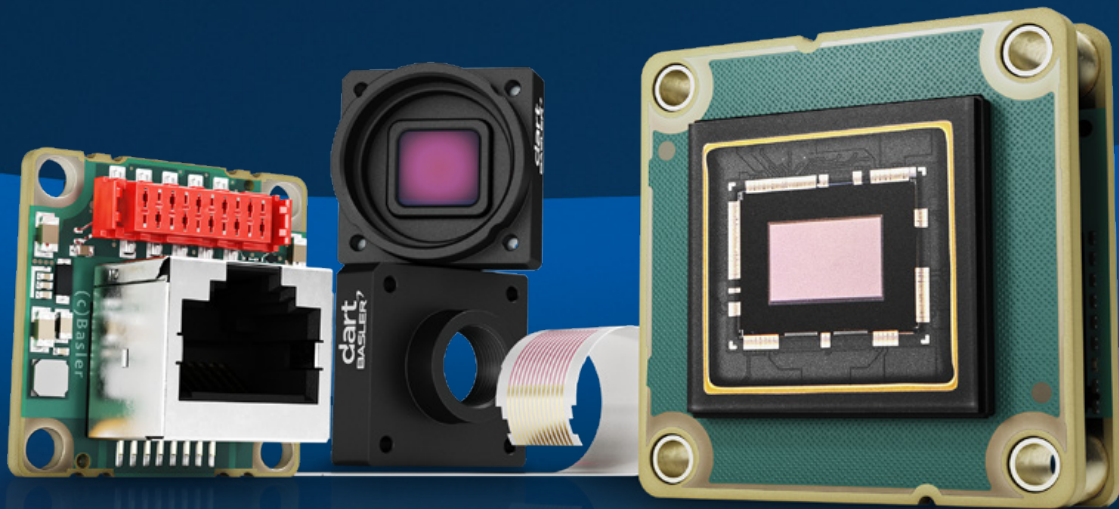

The dart M Building Block


Camera module

Get the camera module with the latest CMOS sensors from Sony. To easily integrate the camera module into your application, continue with the selection of further components. If you would like to develop your own, the camera module can also be integrated into your own electronics via the provided FFC connector.




Flat flex cable (FFC)

Connect the camera module and interface board (or your own electronics) using a 5 cm, 15 cm, or 30 cm flat flex cable. This separation saves space at the image acquisition location and allows you to flexibly decide on the orientation of the interface board or your own electronics.



Interface board

If you decide to use the GigE standard RJ45 plug, you have two interface boards to choose from: either the one-cable solution via PoE (Power overEthernet) or the two-cable solution via AUX power to connect the camera from the interface board to the host system.




Lens mount


The camera module can be used as a bareboard variant or with a lens mount. We offer S- and CS-mounts made of plastic, as well as S-, C- and CS-mounts made of aluminum. The CS- and C-mounts are available for color camera modules with an integrated IR cut filter.




Basler ace 2 X visSWIR See beyond the visible spectrum

The ace 2 X visSWIR cameras deliver the best image quality in the visible and short-wave infrared (SWIR) spectrum. They are also compact and affordable, making them well suited for applications for which conventional SWIR cameras are too large or too expensive.

 **visible + SWIR**
Image acquisition in the visible and short-wave infrared spectrum up to 1.7 µm

 **High image quality**
This uncooled camera delivers exceptional image quality thanks to innovative SWIR camera features

 **Small size, small price**
Camera with a compact housing measuring just 29 mm x 29 mm at a low price

 **Extensive visSWIR accessories**
Coordinated components for a complete vision system from a single source


More information:
baslerweb.com/ace2x-swir



ace 2 X visSWIR

Product Group Specifications

Interface	USB 3.0	Fast Ethernet (100 Mbit/s) or GigE (1000 Mbit/s)	CoaXPress 2.0 (CXP-12)
Housing Size [L × W × H]	42.8 mm × 29 mm × 29 mm	55.5 mm × 29 mm × 29 mm	42.8 mm × 29 mm × 29 mm
Housing Temperature During Operation	-10 °C – 60 °C		
Typical Weight	85 - 90 g	100 g	76 g
Lens Mount	C-mount		
Power Supply	Via USB 3.0 interface	PoE or 12-24 VDC	PoCXP
Digital I/O	1 opto-isolated input + 2 GPIO		
Synchronization	Via hardware trigger, via software trigger, or free-run		
Exposure Control	Via hardware trigger or programmable via the camera API		
Conformity	CE (incl. RoHS), EAC, FCC, GenICam, USB3 Vision 2.0, IP30, KC, RoHS, UL	CE (incl. RoHS), EAC, FCC, GenICam, GigE Vision 2.0, IP30, KC, RoHS, UL	CE (incl. RoHS), EAC, FCC, GenICam, CoaXPress 2.0, IP30, KC, RoHS, UL
Driver	pylon Software Suite		
Operating System	Windows, Linux, macOS, Android		

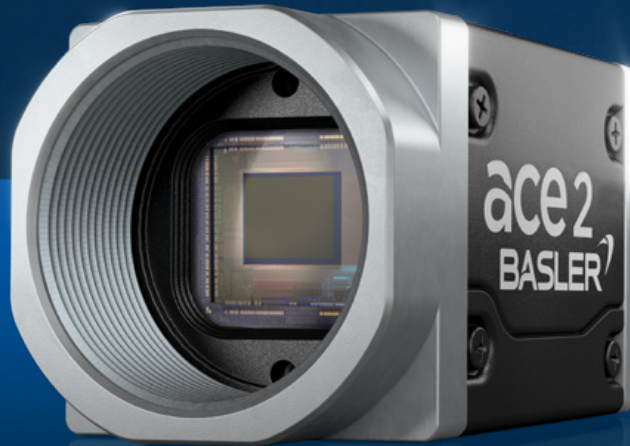

Camera Model	Sensor	Resolution [H×V pixels]	Resolution [MP]	Sensor Type	Shutter	Frame Rate [fps]	Pixel Size [μm ²]	Optical Size ["]
ace 2 X visSWIR USB SWIR								
a2A640-240umSWIR	IMX991	640 × 512	VGA	InGaAs	Global	240	5 × 5	1/4
a2A1280-125umSWIR	IMX990	1280 × 1024	1.3	InGaAs	Global	125	5 × 5	1/2
a2A2048-110umSWIR	IMX993	2048 × 1536	3.1	InGaAs	Global	110	3.45 × 3.45	1/1.8
a2A2560-70umSWIR	IMX992	2560 × 2048	5.2	InGaAs	Global	70	3.45 × 3.45	1/1.4
ace 2 X visSWIR GigE SWIR								
a2A640-240gmSWIR	IMX991	640 × 512	VGA	InGaAs	Global	240	5 × 5	1/4
a2A1280-80gmSWIR	IMX990	1280 × 1024	1.3	InGaAs	Global	80	5 × 5	1/2
a2A2048-35gmSWIR	IMX993	2048 × 1536	3.1	InGaAs	Global	35	3.45 × 3.45	1/1.8
a2A2560-20gmSWIR	IMX992	2560 × 2048	5.2	InGaAs	Global	20	3.45 × 3.45	1/1.4
ace 2 X visSWIR CXP SWIR								
a2A2048-173cmSWIR	IMX993	2048 × 1536	3.1	InGaAs	Global	173	3.45 × 3.45	1/1.8
a2A2560-131cmSWIR	IMX992	2560 × 2048	5.2	InGaAs	Global	131	3.45 × 3.45	1/1.4

Basler ace 2 X UV

See in the ultraviolet spectrum

ace 2 X UV cameras operate in the ultraviolet (UV) spectral range, in which many materials have different optical properties than in the visible range. This predestines the technology for special applications beyond the visible wavelengths.

UV spectrum
 Capturing images in the invisible light spectrum with wavelengths from 0.2 μm to 0.4 μm

High sensitivity
 Thanks to the Sony IMX487 UV sensor with 8.1 MP resolution, global shutter, and back side lighting

Small design
 Easy to design in, thanks to its compact 29 mm x 29 mm housing

UV accessories
 Large selection of UV components suitable for ultraviolet applications

More information: baslerweb.com/ace2x-uv



ace 2 X UV

Product Group Specifications

Interface	USB 3.0	Fast Ethernet (100 Mbit/s), GigE (1000 Mbit/s)	Fast Ethernet (100 Mbit/s), GigE (1000 Mbit/s), 2.5GigE (2500 Mbit/s), 5GigE (5000 Mbit/s)
Housing Size [L x W x H]	42.8 mm x 29 mm x 29 mm	55.5 mm x 29 mm x 29 mm	
Housing Temperature During Operation	0 °C – 50 °C		
Typical Weight	85 g	100 g	102 g
Lens Mount	C-mount		
Power Supply	Via USB 3.0 interface or 12-24 VDC	PoE or 12-24 VDC	12-24 V
Digital I/O	1 opto-isolated input + 2 GPIO		
Synchronization	Via hardware trigger, via software trigger, or free-run		
Exposure Control	Via hardware trigger or programmable via the camera API		
Conformity	CE (incl. RoHS), UKCA, KC, EAC, FCC, GenICam, USB3 Vision, IP30, UL	CE (incl. RoHS), UKCA, KC, EAC, FCC, GenICam, GigE Vision 2.0, IP30, UL	
Driver	pylon Software Suite		
Operating System	Windows, Linux, macOS, Android	Windows, Linux, macOS, Android	Windows, Linux




Camera Model	Sensor	Resolution [H×V pixels]	Resolution [MP]	Sensor Type	Shutter	Frame Rate [fps]	Pixel Size [μm ²]	Optical Size ["]
ace 2 X UV USB BEYOND a2A2840-48umUV	IMX487	2856 × 2848	8.1	CMOS	Global	48	2.74 × 2.74	2/3
ace 2 X UV GigE BEYOND a2A2840-14gmUV	IMX487	2856 × 2848	8.1	CMOS	Global	14	2.74 × 2.74	2/3
ace 2 X UV 5GigE BEYOND a2A2840-67g5mUV	IMX487	2856 × 2848	8.1	CMOS	Global	67	2.74 × 2.74	2/3

Basler racer

Outstanding speed, reliability, and image quality

The Basler racer is perfect for multi-camera setups and low-light applications. These cameras are available in multiple resolutions, with GigE and Camera Link interfaces to fit your needs.

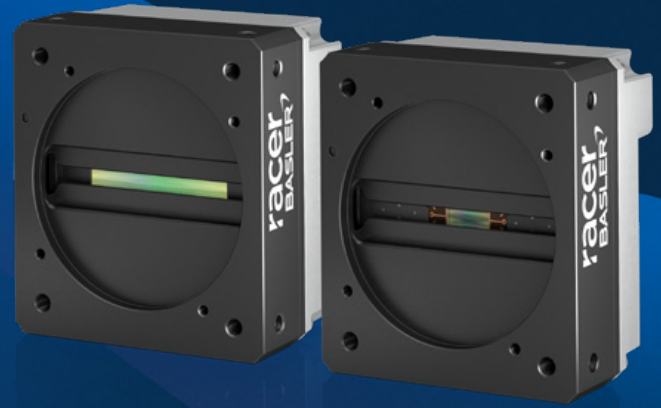

HD Various resolutions
Available in 2k, 4k, 6k, 8k, and 12k resolutions

Line rates up to 80 kHz
For applications that require high throughput

Diverse Interfaces
GigE or Camera Link interfaces for different applications

More information: baslerweb.com/racer



racer

Product Group Specifications

Interface	GigE, Camera Link
Housing Size [L × W × H]	GigE: 36.2 mm × 56 mm × 62 mm, CL: 33.8 mm × 56 mm × 62 mm
Housing Temperature During Operation	0 °C – 60 °C
Typical Weight	GigE: ca. 240 g, CL: ca. 210 g
Lens Mount	C-mount, F-mount, M42 × 1, M42 × 0.75, M58 × 0.75
Power Supply	12-24 VDC (±5%), PoCL1
Digital I/O	GigE: 3 in/2 out, CL: via camera control signals (max. 4)
Synchronization	Via hardware trigger, via software trigger, or free-run
Exposure Control	Trigger width or timed
Conformity	CE, RoHS, GenICam, IP30, UL, FCC, GigE Vision/Camera Link, KC, EAC, UKCA
Driver	pylon Software Suite or 3rd party Software
Operating System	Windows, Linux, macOS

¹ raL2048-80km and raL4096-80km only.

Camera Model	Sensor	Resolution [H×V pixels]	Resolution [Pixels]	Sensor Type	Shutter	Line Rate [kHz]	Pixel Size [µm ²]	Sensor Format [mm]
racer GigE								
raL2048-48gm	DR-2k-7	2048 × 1	2k	CMOS	Global	51	7.0 × 7.0	14.3
raL4096-24gm	DR-4k-7	4096 × 1	4k	CMOS	Global	26	7.0 × 7.0	28.7
raL6144-16gm	DR-6k-7	6144 × 1	6k	CMOS	Global	17	7.0 × 7.0	43.0
raL8192-12gm	DR-8k-3.5	8192 × 1	8k	CMOS	Global	12	3.5 × 3.5	28.7
raL12288-8gm	DR-12k-3.5	12288 × 1	12k	CMOS	Global	8	3.5 × 3.5	43.0
racer Camera Link								
raL2048-80km	DR-2k-7	2048 × 1	2k	CMOS	Global	80	7.0 × 7.0	14.3
raL4096-80km	DR-4k-7	4096 × 1	4k	CMOS	Global	80	7.0 × 7.0	28.7
raL6144-80km	DR-6k-7	6144 × 1	6k	CMOS	Global	80	7.0 × 7.0	43.0
raL8192-80km	DR-8k-3.5	8192 × 1	8k	CMOS	Global	80	3.5 × 3.5	28.7
raL12288-66km	DR-12k-3.5	12288 × 1	12k	CMOS	Global	66	3.5 × 3.5	43.0

Basler racer 2

Fast line scan cameras with up to 16k resolution

Basler racer 2 line scan cameras have resolutions of up to 16k and line rates of up to 500 kHz. They are especially suitable for quality assurance in battery production, for example.



Various resolutions

Available in 2k, 4k, 8k and 16k resolutions



Latest CMOS sensors

Best images thanks to latest line scan sensors from Gpixel



Line rates up to 500 kHz

For applications that require high performance

More information: baslerweb.com/racer2



CoaXPress
over-Fiber



racer 2 S

racer 2 L

racer 2 XL

Product Group Specifications

	racer 2 S	racer 2 L	racer 2 XL
Interface	GigE, 5GigE, CoaXPress 2.0 (CXP-12)	CoaXPress 2.0 (CXP-12)	CoaXPress-over-Fiber
Housing Size [L × W × H]	GigE, 5GigE: 48.9 mm × 29 mm × 29 mm CoaXPress 2.0: 48.9 mm × 29 mm × 29 mm	36 mm × 80 mm × 90 mm	106 mm × 110 mm × 110 mm
Housing Temperature During Operation	-10 °C – 60 °C	0 °C – 50 °C	0 °C – 50 °C
Typical Weight	< 105 g	420 g	1420 g
Lens Mount	C-mount	M72 × 0.75	M90 × 1
Power Supply	12–24 VDC	24 VDC	21.6–26.4 VDC
Digital I/O	1 opto-coupled input line 2 general purpose I/O (GPIO) lines	3 differential general purpose I/O (GPIO) lines	1 CXP trigger via QSPF28 3 differential GPIO lines
Synchronization	Via hardware trigger, via software trigger, or free-run		
Exposure Control	Via hardware trigger or programmable via the camera API		
Conformity	CE, CoaXPress 2.0, FCC, GenICam, KC, RoHS, UKCA, UL Listed, EAC, GigE Vision, IP30	CE, CoaXPress 2.0, FCC, GenICam, KC, RoHS, UKCA	CE (incl. RoHS), UKCA, FCC, KC, GenICam, CoaXPress-over-Fiber, IP30
Driver	pylon Software Suite or 3rd party Software	pylon Software Suite or 3rd party Software	FG-SDK or GenICam supporting 3rd party software
Operating System	Windows, Linux	Windows, Linux	Windows

Camera Model	Sensor	Resolution [H×V pixels]	Resolution [Pixels]	Sensor Type	Shutter	Line Rate [kHz]	Pixel Size [µm²]	Sensor Format [mm]
racer 2 XL								
★ r2T16416-500cm	GLT5016BSI	16416 × 1	16k	CMOS	Global	500	5.0 × 5.0	82
racer 2 L								
r2L 8192-240cm	GL7008m	8192 × 4	8k	CMOS	Global	240	7.0 × 7.0	57.3
r2L 8192-80cc	GL7008c	8192 × 4	8k	CMOS	Global	80	7.0 × 7.0	57.3
r2L 16384-120cm	GL3516m	16384 × 2	16k	CMOS	Global	120	3.5 × 3.5	57.3
r2L 16384-60cc	GL3516c	16384 × 2	16k	CMOS	Global	60	3.5 × 3.5	57.3
racer 2 S CXP-12								
r2L 2048-172cm	GL3504	2048 × 1	2k	CMOS	Global	172	7.0 × 7.0	14.3
r2L 2048-62cc	GL3504	2048 × 3	2k	CMOS	Global	62	7.0 × 7.0	14.3
r2L 4096-84cm	GL3504	4096 × 1	4k	CMOS	Global	84	3.5 × 3.5	14.3
r2L 4096-42cc	GL3504	4096 × 2	4k	CMOS	Global	42	3.5 × 3.5	14.3
racer 2 S 5GigE								
r2L 2048-172g5m	GL3504	2048 × 1	2k	CMOS	Global	172	7.0 × 7.0	14.3
r2L 2048-62g5c	GL3504	2048 × 3	2k	CMOS	Global	62	7.0 × 7.0	14.3
r2L 4096-84g5m	GL3504	4096 × 1	4k	CMOS	Global	84	3.5 × 3.5	14.3
r2L 4096-42g5c	GL3504	4096 × 2	4k	CMOS	Global	42	3.5 × 3.5	14.3
racer 2 S GigE								
r2L 2048-58gm	GL3504	2048 × 1	2k	CMOS	Global	58	7.0 × 7.0	14.3
r2L 2048-29gc	GL3504	2048 × 3	2k	CMOS	Global	29	7.0 × 7.0	14.3
r2L 4096-29gm	GL3504	4096 × 1	4k	CMOS	Global	29	3.5 × 3.5	14.3
r2L 4096-14gc	GL3504	4096 × 2	4k	CMOS	Global	14	3.5 × 3.5	14.3

Basler ToF Camera

3D imaging for industrial applications

Basler's time-of-flight camera provides precise 3D images in real time thanks to Sony's DepthSense™ sensor technology and integrated depth image processing. The camera operates according to the time-of-flight principle at 850 nm or 940 nm wavelengths.



850 nm and 940 nm

Outstanding depth data thanks to the right wavelengths for indoor and outdoor use



3D images in real time

Minimal latency and precise hardware triggering provide fast 3D image capture



IP67 camera

Robust housing is dirt- and water-proof, with a M12 connector for demanding industrial applications



Dual Exposure HDR

Robust 3D imaging for scenes with large differences in brightness

More information: baslerweb.com/tof



Camera Model	blaze-101	blaze-102	blaze-112
Product Group Specifications			
Wavelength	940 nm	850 nm	850 nm
Field of View	67° × 51°	67° × 51°	108° × 77°
Sensor	Sony DepthSense™ IMX556		
Resolution	640px × 480px		
Frame Rate	30 fps		
Interface	GigE Vision, GenICam		
Working Range	0 m - 10 m		
Accuracy (typical)	±5 mm (0.5 - 5.5 m)		
Housing Size	100 mm × 81 mm × 64 mm		
Conformity	CE, FCC, RoHS, REACH, IP67, Laser Class 1 IEC60805-1:2014, EAC ¹		
Software Support	pylon, Isaac, OpenCV, HALCON, MIL, Point Cloud Library (PCL), ROS, ROS2		


¹ Only for selected models, please refer to our website baslerweb.com/tof for detailed information.


Basler RGB-D Solution

3D depth information in true colors

Combine spatial depth data from the Basler ToF Camera with RGB data from a 2D area scan camera and the result is a 3D point cloud in the colors seen by the human eye. The advantages: better scene understanding and more precise recognition of similar objects.


More information: baslerweb.com/rgb-d-solution

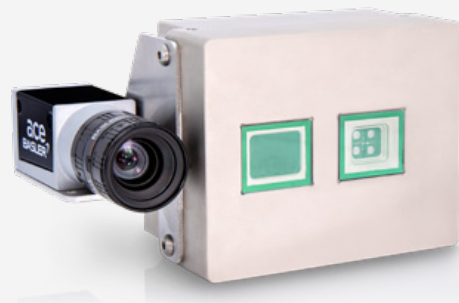

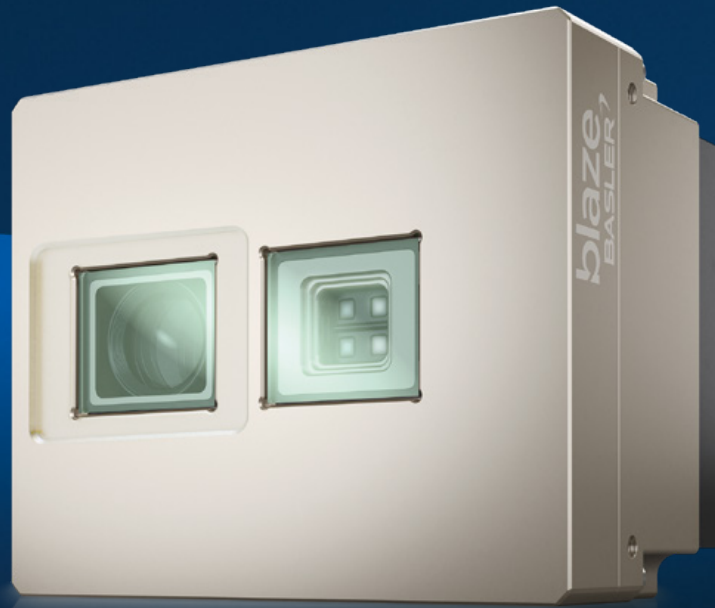

3D Point Cloud in False Colors

The Basler ToF Camera provides 3D data as a range map or point cloud containing the x/y/z 3D coordinates for each sensor pixel. To make the evaluation user-friendly, the points are often displayed in rainbow colors (rainbow color mapping). Depth values in the near range appear red to yellow while distant values are green to blue.

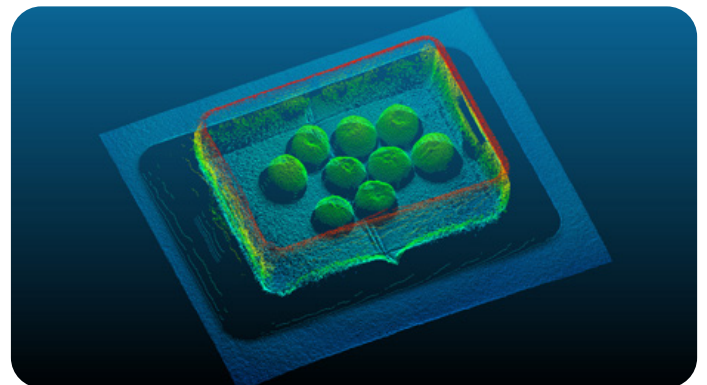

3D Point Cloud in RGB Colors

If the depth values of the Basler ToF Camera are combined with separately recorded color values from an RGB camera, point clouds can be displayed in the colors that are actually present. This can help compensate for missing depth information, allow additional classifications to be performed based on object color, or it can facilitate scene understanding.

Possible RGB-D Solutions

Basler RGB-D Solution	ToF Camera	ace 2 Camera	Lens
RGBD blaze-101 2.3MP	blaze-101	a2A1920-51gcBAS - IMX392	Basler C125-0418-5M F1.8 f4mm
RGBD blaze-101 5MP	blaze-101	a2A2448-23gcBAS - IMX547	Basler C125-0618-5M F1.8 f6mm
RGBD blaze-102 2.3 MP	blaze-102	a2A1920-51gcBAS - IMX392	Basler C125-0418-5M F1.8 f4mm
RGBD blaze-102 5 MP	blaze-102	a2A2448-23gcBAS - IMX547	Basler C125-0618-5M F1.8 f6mm

Basler Stereo Cameras

Industrial-grade hardware with intelligent 3D software modules

Basler stereo cameras are ideal for pick-and-place tasks in the fields of robotics, logistics, and factory automation. They impress with their outstanding image quality, low latency, and simple commissioning thanks to intuitive software. Compatibility with Basler 3D application software and third-party software offers many possible applications.



Plug-and-play

Easy integration thanks to intuitive software and numerous interfaces



Modular software suite

Intelligent 3D software modules for your individual image-controlled robotics application



Industrial grade

Rugged design engineered for high performance in demanding industrial environments



Cost efficiency

Overall system costs are optimized thanks to a modular hardware and software concept

More information: baslerweb.com/stereo



Basler Stereo visard

Industrial-grade 3D stereo vision for image-guided robotics

Thanks to the Basler Stereo visard series, robots can perceive their environment in real time. With the pre-installed, onboard software package and matching application software, these cameras are suitable for typical robotics tasks, such as pick-and-place.

Camera Model	Stereo Camera rc_visard 65m	Stereo Camera rc_visard 65c	Stereo Camera rc_visard 160m	Stereo Camera rc_visard 160c	Stereo Camera rc_visard 160m-6
Product Group Specifications					
Baseline	65 mm	65 mm	160 mm	160 mm	160 mm
Working Range	0.2 m - 1 m	0.2 m - 1 m	0.5 m - 3 m	0.5 m - 3 m	0.5 m - 3 m
Field of View	175 × 180 at 0.2 m 535 × 450 at 0.5 m 1.135 × 900 at 1 m	175 × 180 at 0.2 m 535 × 450 at 0.5 m 1.135 × 900 at 1 m	440 × 450 at 0.5 m 1.040 × 900 at 1 m 2.240 × 1.800 at 2 m	440 × 450 at 0.5 m 1.040 × 900 at 1 m 2.240 × 1.800 at 2 m	240 × 300 at 0.5 m 640 × 600 at 1 m 1.440 × 1.200 at 2m
Dimensions [W x H x L]	135 mm x 75 mm x 96 mm	135 mm x 75 mm x 96 mm	230 mm x 75 mm x 84 mm	230 mm x 75 mm x 84 mm	230 mm x 75 mm x 84 mm
Resolution	1.2 mpx (1280 × 960 px)				
Active Pattern	Optional with White, 5500 K				
Hardware Interface	1x Gigabit Ethernet, M12, 1× 24 V DC M12				
Software Interface	REST, ROS, GenICam, Robot specific				



Basler Stereo ace

High 3D image quality, even with challenging surfaces

The Basler Stereo ace impresses with its high resolution and outstanding image quality, even with demanding surfaces. This is achieved through factory pre-calibration and the integrated pattern projector. Thanks to extremely low latency times, the cameras are ideal for pick-and-place applications in the logistics sector.

Camera Model	Stereo ace 100	Stereo ace 200	Stereo ace 300
Product Group Specifications¹			
Baseline	100 mm	200 mm	300 mm
Field of view	789 × 737 at 1 m 1677 × 1475 at 2 m	630 × 710 at 1 m 1915 × 1770 at 2 m 2305 × 2125 at 3 m	836 × 669 at 1.1 m 1470 × 1470 at 2.0 m 2360 × 2210 at 3.0 m 3250 × 2940 at 4.0 m 4140 × 3680 at 5.0 m
Software Interface	GenICam, pylon SDK, Aravis		
Dimensions [W x H x L]	146 × 70 × 132 mm, 1500 g	245 × 70 × 159 mm, 1700 g	345 × 70 × 158.5 mm, 1800 g
Working Range	0.6 m - 2 m	0.71 m - 3 m	1.1 m - 5 m
Resolution	5.1 MP (2472 × 2064 px)		
Active Pattern	White, 5700 K		
Hardware Interface	2x Gigabit Ethernet RJ45, 1 × 24 V DC M12		
Host Requirements	Linux / Windows, x86-64, Nvidia GPU RTX 2070 or similar		

¹Preliminary Specifications

Basler Stereo mini

Compact and cost-efficient stereo vision for mobile robots and logistics automation

The Basler Stereo mini is a lightweight, factory-calibrated stereo camera delivering reliable 3D perception for object detection and navigation. With low latency, small form factor, and low power consumption, it integrates easily into mobile robots and intralogistics applications where size, weight, and cost efficiency are critical.

Camera Model	Stereo mini STM-501u / STM-502u	Stereo mini STM-951u / STM-952u	Stereo mini STM-951mg
Product Group Specifications			
Baseline	50 mm	95 mm	95 mm
Working Range	0.26 m - 3 m	0.25 m - 6 m	0.25 m - 6 m
Depth Accuracy	≤ 1.5 % @ 2 m	≤ 0.8 % @ 2 m; ≤ 1.6 % @ 4 m	≤ 0.8 % @ 2 m; ≤ 1.6 % @ 4 m
Depth Optical Filter	None (501u) / IR-pass (502u)	Visible suppression (951u) / IR-pass (952u)	Visible suppression
Depth Field of View	90° × 65° ± 3° @ 2 m	90° × 65° ± 3° @ 2 m	90° × 65° ± 3° @ 2 m
Depth Image Resolution & FPS	1280 × 800 @ 30 fps 848 × 480 @ 60 fps	1280 × 800 @ 30 fps 848 × 480 @ 60 fps	1280 × 800 @ 30 fps 848 × 480 @ 60 fps
RGB Image Resolution & FPS	1920 × 1080 @ 30 fps 1280 × 720 @ 60 fps	1280 × 800 @ 60 fps 1280 × 720 @ 60 fps	1280 × 800 @ 60 fps 1280 × 720 @ 60 fps
Ego-motion (IMU)	Yes	Yes	Yes
Housing Size	90 mm × 25 mm × 30 mm	124 mm × 29 mm × 27 mm	124 mm × 29 mm × 36 mm
Protection Class	IP5X	IP65	IP65



Camera Model	Stereo mini STM-951g	Stereo mini STM-955g
Product Group Specifications		
Baseline	95 mm	95 mm
Working Range	0.25 m - 6 m	0.31 m - 10 m
Depth Accuracy	≤ 0.8 % @ 2 m; ≤ 1.6 % @ 4 m	≤ 0.4 % @ 2 m; ≤ 0.8 % @ 4 m
Depth Optical Filter	Visible suppression	Visible suppression
Depth Field of View	90° × 65° ± 3° @ 2 m	90° × 65° ± 3° @ 2 m
Depth Image Resolution & FPS	1280 × 800 @ 30 fps 848 × 480 @ 60 fps	1280 × 800 @ 30 fps 848 × 480 @ 60 fps
RGB Image Resolution & FPS	1280 × 800 @ 60 fps 1280 × 720 @ 60 fps	1280 × 800 @ 60 fps 1280 × 720 @ 60 fps
Ego-motion (IMU)	Yes	Yes
Housing Size	124 mm × 29 mm × 50 mm	138 mm × 40 mm × 70 mm
Protection Class	IP67	IP67

Basler Robotics Application Software

Precise 3D vision software for robot applications

The plug and play software modules are suitable for typical robotics applications, such as object recognition, picking tasks, and navigation. You can select the exact modules that suit your requirements and easily combine them with our stereo cameras. Thanks to standardized software interfaces, they can be easily integrated into your robot environment.



Plug and play

Easy-to-activate application modules and software interfaces for robot integration



For typical robotics applications

Application-specific modules for typical robotics tasks, providing efficient automation and precise control



Web-based user interface

Intuitive, web-based configuration of the modules and real-time preview of the detected objects with the respective gripping points



Reduced system costs

Individually selectable modules, instead of a complete package, avoid unnecessary costs


More information:

baslerweb.com/3d-application-software



Software Modules for Robotic Tasks

Tailored to typical robotics applications, the 3D Application Software Suite includes six modules for tasks such as: object recognition and identification, picking, navigation, and CAD matching. Individual modules are designed to address the unique requirements of each of these tasks. The software modules are compatible with all Basler Stereo Camera models. When combined with the 3D Camera Cube, the Basler 3D ItemPick and Basler 3D BoxPick modules can also be used with the Basler ToF Camera.

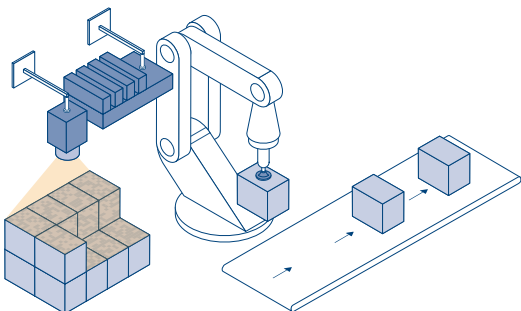


3D BoxPick

The 3D BoxPick Module enables the robot to detect the position, orientation and size of stationary rectangular objects, and to place them in a defined position.


3D BoxPick+Match: Pick and place for printed items

Enhanced with the innovative +Match extension, it demonstrates an advanced ability to detect and identify multiple rectangles with identical appearance.

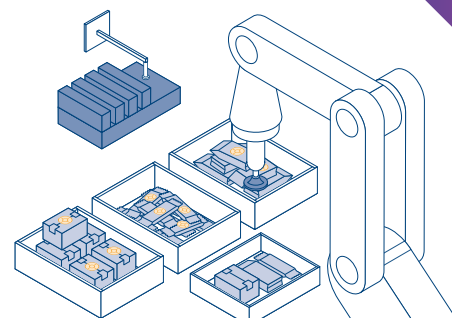



3D ItemPickAI

The 3D ItemPickAI Module is an AI-based software module for pick-and-place applications with unknown objects like bags or consumer goods, without teaching or training data.

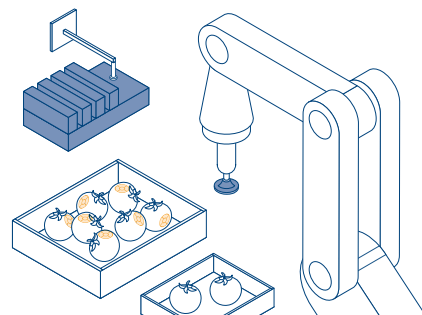


3D ItemPick

The 3D ItemPick Module is an ideal choice for robotic pick-and-place systems that operate with suction grippers, as it calculates surface grasp points on given objects.

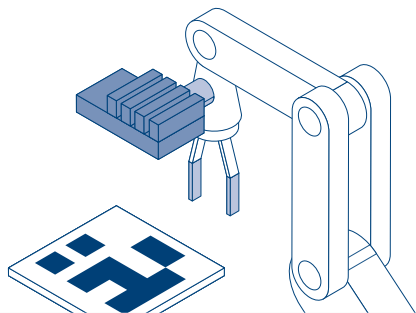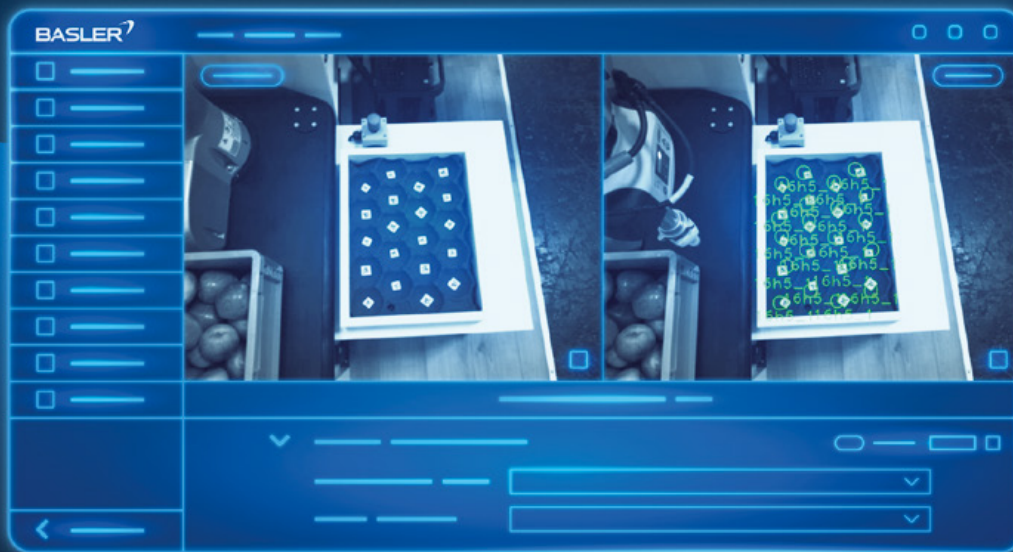


3D TagDetect

The 3D TagDetect Module enables the robust detection of AprilTags and QR codes which makes it a fundamental component for the efficient identification and manipulation of labelled objects, such as in pick-and-place applications.

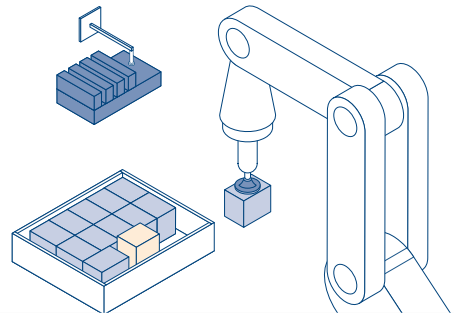


3D LoadCarrier

3D Software LoadCarrier to recognize containers and fill level. The LoadCarrier module is used to recognize containers and can be combined with BoxPick, BoxPick +Match, ItemPick, SilhouetteMatch and CADMatch.




3D SilhouetteMatch

The 3D SilhouetteMatch Module lets robots detect the position and orientation of flat objects on a plane surface, by matching the specific scene against a previously taught template.

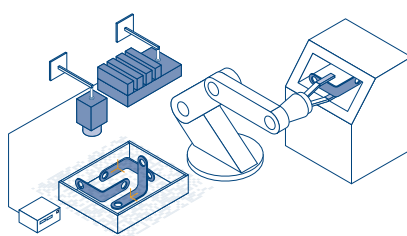

3D CADMatch

The 3D CADMatch Module enables the robot to reliably detect, localize and pick unmixed objects, based on CAD data and fully independent of the objects' position and orientation.

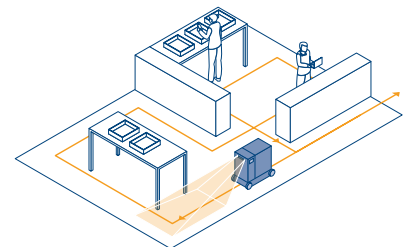

3D SLAM

The 3D SLAM Module is a key element of most mobile navigation applications as it provides drift-free and accurate localization without GPS.

PC Cards

Reliable image acquisition and stable operation

PC cards offer an easy, flexible connection between your cameras and the host PC, delivering the highest performance and reliable image acquisition via your chosen interface. Our PC cards are tested for continuous operation under common operating conditions and against operating system updates to ensure optimal performance.



Reliable capture

Reliable image acquisition enables continuous operation



Carefully tested

All of our products are tested under common operating conditions over the product's lifecycle, including operating system updates



Simple system integration

Flexible connection between the camera and host PC allows multi-camera systems or additional functions



Best price/performance ratio

Constant testing of the interface cards ensures the highest performance


More information: baslerweb.com/pccards



CXP-12 Interface Cards

Interface cards with the powerful CoaXPress 2.0 standard are used for particularly demanding applications. Basler CXP-12 interface cards are characterized by the following features:

- Latest FPGA technology ensures the lowest load on the CPU for data transfer and storage
- Hardware-based image preprocessing
- Precise camera synchronization
- Lowest latencies

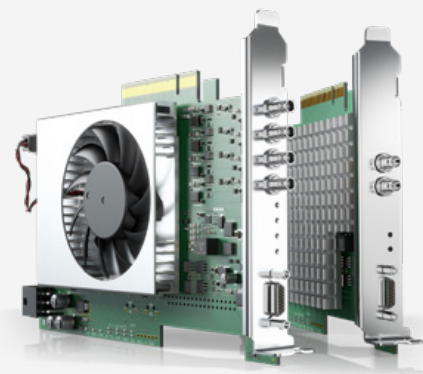

CXP-12 Interface Cards

	CXP-12 Interface Card 1C	CXP-12 Interface Card 2C	CXP-12 Interface Card 4C
Data Rate	3260 MB/s		6520 MB/s
Interface Host	PCIe 3.0 ×4		PCIe 3.0 ×8
On-Board Memory		1 GB DDR4-RAM	1.5 GB DDR4-RAM
Size (L × W × H)	PCIe low profile card (167.65 mm × 68.9 mm × 18 mm)		PCIe standard height (167.64mm × 111.15 mm)
Camera Interface	1× Micro-BNC (HD-BNC)	2× Micro-BNC (HD-BNC)	4× Micro-BNC (HD-BNC)
Power Supply	PCIe 6-pin connector 12 V (required for PoCXP)		
Trigger Connector	D-Sub Micro-D 15pin		
Typical Weight	180 g		270 g
Software	pylon Software Suite (version 6.1 or higher)		
Operating System	Windows, Linux (64-Bit)		
Conformity	CE, RoHS, WEEE, REACH, GenICam, EAC ¹ , PCB compliant with UL 94 V-0		

¹ Only for selected models



USB 3.0 Interface Cards

For trouble-free vision systems

They are the ideal solution for multi-camera setups with USB3 Vision: with 2, 4 or 8 ports, easy installation, and up-to-date drivers (even for software updates), you can expect a stable vision system.



- Simple integration: All of our components are compatible and easy to connect to target systems using pylon software
- Long-term product availability: Our vision portfolio products are all available on a long-term basis, allowing you to future-proof your system design
- Carefully tested: All of our products are tested under common operating conditions over the product's life-cycle, including operating system updates
- USB3 Vision certified: For stable communication between hardware and software

USB 3.0 Interface Cards

	No. of Ports	Chipset	PCIe Connection
Basler USB Interface Card, 1HC, 5G, 2Port	2	Renesas	PCIe x1 Gen2
Basler USB Interface Card, 1HC, 10G, 2Port	2	ASM	PCIe x4 Gen 3
Basler USB Interface Card, 1HC, 5G, 4Port	4	Renesas	PCIe x1 Gen2
Basler USB Interface Card, 4HC, 5G, 4Port	4	Fresco FL1100	PCIe x4 Gen2
Basler USB Interface Card, 4HC, 5G, 8Port	8	Fresco FL1100	PCIe x4 Gen2

GigE Interface Cards

For flexible multi-camera setups

Expand your GigE Vision applications with 1, 2.5, 5 and 10GigE interface cards: Configure multi-camera systems with up to four cameras at full bandwidth and benefit from single-cable solutions for data transfer and power supply via the Power over Ethernet+ (PoE+) function.



- Optional PoE+ function: Only one cable needed to transmit data and power
- Failsafe: Interface card and cameras work together to ensure uninterrupted operation
- Simple integration: Easy system and network setup through pylon software and plug-and-play components
- GigE Vision certified: Easy integration into image processing programs through software libraries

GigE Interface Cards at a glance

- Large selection: Numerous industrial-grade GigE interface cards for receiving image data and operating multiple cameras on a single PC
- Data bandwidth: 1, 2.5, 5 or 10 Gbit/s
- Number of ports: one port, two ports, or four ports for single- or multi-camera systems
- With or without PoE+ function
- High performance and reliability: Performance optimizations via the pylon software and Basler GigE Performance Driver



GigE Interface Cards

	Connectors	POE (IEEE 802.3AF)	PTP (IEEE 1588)	PC BUS IF
Basler 10GigE Interface Card, 1 Port	RJ45×1	no	yes	PCIe x4 (3.0)
Basler 5GigE Interface Card, 4 Port	RJ45×4	no	no	PCIe x4 (3.0)
Basler 5GigE Interface Card, 4 Port PoE+	RJ45×4	yes	no	PCIe x4 (3.0)
Basler 2.5GigE Interface Card, 1 Port	RJ45×1	no	yes	PCIe x1 (3.1)
Basler 2.5GigE Interface Card, 4 Port PoE+	RJ45×4	yes	yes	PCIe x4 (2.0)
Basler GigE Interface Card, 1 Port	RJ45×1	no	yes	PCIe x1 (2.1)
Basler GigE Interface Card, 1 Port PoE	RJ45×1	yes	yes	PCIe x1 (2.1)
Basler GigE Interface Card, 2 Port	RJ45×2	no	yes	PCIe x1 (2.1)
Basler GigE Interface Card, 2 Port PoE	RJ45×2	yes	yes	PCIe x4 (2.1)
Basler GigE Interface Card, 4 Port	RJ45×4	no	yes	PCIe x4 (2.1)
Basler GigE Interface Card, 4 Port PoE	RJ45×4	yes	yes	PCIe x4 (2.1)

Frame Grabber

Control center of the vision system

Frame grabbers are one of the key components for robust, high-speed image acquisition and signal control. At the core of the image acquisition boards are FPGA processors that ensure extensive image data processing in real time.



Reduced CPU load

Thanks to efficient image preprocessing, which creates lower data volume



Real-time image processing

Thanks to image and trigger processing with deterministic latencies



Bandwidths up to 100 Gbps

For joint processing of high data rates and high resolutions



Customizable

Individually programmable with our frame grabber services

More information:

baslerweb.com/framegrabbers



Our Frame Grabber Series

imaFlex 2 Dual 100

The programmable CoaXPress-over-Fiber frame grabber features two QSFP28 ports, each with 100 Gbps bandwidth.

- Connection of up to two cameras or one camera and one data forwarding connection
- Image preprocessing for reduced system complexity
- Signal processing via front I/O and trigger extension (both 8IN/8OUT)
- Active cooling for reliable continuous operation



imaFlex

imaFlex are powerful, individually programmable CoaXPress 2.0 frame grabbers for high-end vision applications.

- Graphical FPGA programming via VisualApplets for application-specific real-time processing of image data
- Services for individual customization of the frame grabber
- With four or five CXP-12 channels
- Up to 62.5 Gbps bandwidth
- Multi-frame grabber and multi-camera support



imaWorx

imaWorx CXP-12 Quad is a CoaXPress 2.0 frame grabber for high-speed image acquisition in demanding machine vision applications.

- With four CXP-12 channels
- Up to 50 Gbps bandwidth
- Power over CoaXPress
- Multi-frame grabber and multi-camera support




microEnable 5 marathon

The marathon frame grabbers are powerful image acquisition and preprocessing cards with Camera Link or CXP-6 interfaces.

- Graphical FPGA programming via VisualApplets for application-specific real-time processing of image data
- Services for individual customization of the frame grabber
- With four CXP-6 or two Camera Link channels
- Up to 25 Gbps bandwidth



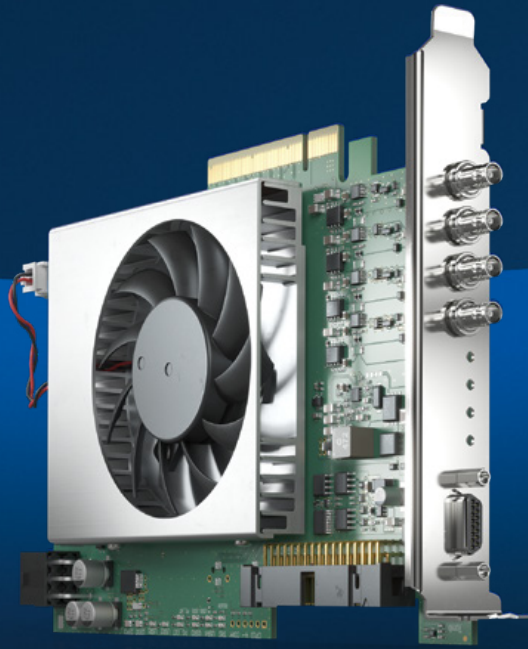

Frame Grabber	Camera IF	Connectors	Max. Data in	FPGA programming	PC Bus IF	Resolution A:Area, L:Line
CoaXPress-over-Fiber						
★ imaFlex 2 Dual 100	CoaXPress-over-Fiber	2x QSFP28	Dual 4× 25 Gbps	programmable	PCIe x16 (Gen 3)	A: 32 k x 65 k, L: 32 k
CoaXPress 2.0						
imaFlex CXP-12 Quad	CoaXPress 2.0	4x Micro-BNC	4× 12.5 Gbps	programmable	PCIe x8 (Gen 3)	A: 32 k x 65 k, L: 32 k
imaFlex CXP-12 Penta	CoaXPress 2.0	5x Micro-BNC	5× 12.5 Gbps	programmable	PCIe x8 (Gen 3)	A: 32 k x 65 k; L: 32 k
imaWorx CXP-12 Quad	CoaXPress 2.0	4x Micro-BNC	4× 12.5 Gbps	configurable	PCIe x8 (Gen 3)	A: 32 k x 65 k, L: 32 k
CoaXPress 1.1						
mE5 marathon ACX-QP	CoaXPress 1.1.1	4x DIN 1.0/2.3	4× 6,25 Gbps	configurable	PCIe x4 (Gen 2)	A: 16 k x 64 k, L: 32 k
mE5 marathon VCX-QP	CoaXPress 1.1.1	4x DIN 1.0/2.3	4× 6,25 Gbps	programmable	PCIe x4 (Gen 2)	A: 64 k x 64 k, L: 64 k
Camera Link						
mE5 ironman AD8-PoCL	Camera Link 2.0	2x MDR26	850 MBps	configurable	PCIe x8 (Gen 2)	A: 16 k x 64 k, L: 16 k
mE5 marathon ACL	Camera Link 2.0	2x SDR26 (miniCL)	850 MBps	configurable	PCIe x4 (Gen 2)	A: 16 k x 64 k, L: 16-52 k
mE5 marathon VCL	Camera Link 2.0	2x SDR26 (miniCL)	850 MBps	programmable	PCIe x4 (Gen 2)	A: 64 k x 64 k, L: 64 k
mE5 marathon VCLx	Camera Link 2.0	2x SDR26 (miniCL)	850 MBps	programmable	PCIe x4 (Gen 2)	A: 64 k x 64 k, L: 64 k

We Engineer Your Vision Application

While we offer a broad portfolio of off-the-shelf products, one of our value propositions is our ability to deliver application engineering and custom vision solutions tailored to your needs. At Basler, we work closely with our customers to develop the design and specifications that provide an optimum performance, cost, quality, and time-to-market.

Our Goal Is to Make Your System Perform

Machine vision systems are complex and dynamic at the same time. As experts in this field, we will guide you competently through the development process: from the initial inquiry to the finished product concept, and regardless of whether you need advice on the entire system or individual components.

“ Basler is our partner of choice for outstanding camera and vision systems characterized by high quality hardware and comprehensive service that support us in implementing future-proof AI-enabled complex automation systems.

Prof. Dr.-Ing. Jens Lambrecht, Managing Director Gestalt Robotics

“ Basler was the first choice by our engineers and purchasing department.

Dr. Eugen Funk, Managing Director Gestalt Robotics

Our Capabilities in Detail

We offer a range of capability packages for different project sizes. Whether you need a custom camera, application engineering, or a complete project-based solution, we carefully consider all aspects of a vision system. With our experience from many successful customer projects, our commitment to quality and our regional presence, you can be sure that your project is in safe hands with us.

Custom camera hardware and software

Our range of services include:

- Mount conversion, interface connector alignment, different housing colors or branding
- Extended temperature limits, IP67 capability, integration of various filters, polarization cameras
- Different binning modes, exposure time reduction or extension, HDR mode






Frame grabber and FPGA programming

Our range of services include:

- Programming: Graphical programming of frame grabbers with VisualApplets designs
- Verification: Verification of your VisualApplets designs, resource and error analysis
- Customized applications on request, simulation of applications
- Workshops: VisualApplets workshops for beginners and advanced users

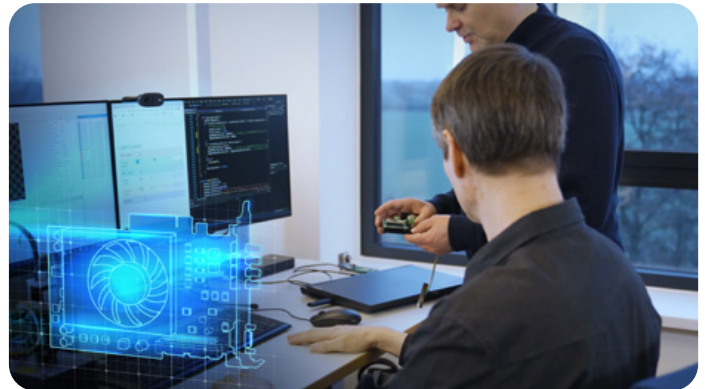

Solutions for AI and classic image analysis

Our range of services include:

- Development and training of AI models and convolutional neural networks (CNNs) with different architectures, e.g. U-Net architecture, MobileNet backbone.
- Adaptation and training of existing CNNs
- Integration with target systems, optimization for AI accelerators

Lenses

For optimal imaging quality in your machine vision application

Together with the camera and lighting, industrial lenses are crucial for the quality of your images. Optimal imaging performance enables the analysis of the finest structures and saves processing time in image analysis.



Reliability

Reliable performance and delivery, with short delivery times and long-term availability



Quality

Extensive quality control for reliable lenses



Flexibility

Well-designed portfolio with a wide range of products to meet a variety of requirements



More information: baslerweb.com/lens



Basler Lens	Maximum Image Circle	Magnification	Working Distance [mm]	Resolution [MP]	Pixel Pitch [µm]	Mount
Basler Telecentric Lenses						
★ Basler Lens C23T-03-110-VI	2/3" (11 mm)	0.3x	110	5	3.45	C-mount
★ Basler Lens C23T-03-110-VI-C	2/3" (11 mm)	0.3x	110	5	3.45	C-mount
★ Basler Lens C23T-1-110-VI	2/3" (11 mm)	1x	108	5	3.45	C-mount
★ Basler Lens C23T-1-110-VI-C	2/3" (11 mm)	1x	108	5	3.45	C-mount
★ Basler Lens C23T-2-110-VI	2/3" (11 mm)	2x	108	5	3.45	C-mount
★ Basler Lens C23T-2-110-VI-C	2/3" (11 mm)	2x	108	5	3.45	C-mount
★ Basler Lens C11T-05-110-VI	1.1" (17.5 mm)	0.5x	110	25	2.5	C-mount
★ Basler Lens C11T-05-110-VI-C	1.1" (17.5 mm)	0.5x	110	25	2.5	C-mount
★ Basler Lens C11T-08-110-VI	1.1" (17.5 mm)	0.8x	110	25	2.5	C-mount
★ Basler Lens C11T-08-110-VI-C	1.1" (17.5 mm)	0.8x	110	25	2.5	C-mount
★ Basler Lens C11T-1-110-VI	1.1" (17.5 mm)	1x	110	25	2.5	C-mount
★ Basler Lens C11T-1-110-VI-C	1.1" (17.5 mm)	1x	110	25	2.5	C-mount
★ Basler Lens C11T-2-110-VI	1.1" (17.5 mm)	2x	110	25	2.5	C-mount
★ Basler Lens C11T-2-110-VI-C	1.1" (17.5 mm)	2x	110	25	2.5	C-mount
★ Basler Lens C11T-4-110-VI	1.1" (17.5 mm)	4x	108	25	2.5	C-mount
★ Basler Lens C11T-4-110-VI-C	1.1" (17.5 mm)	4x	108	25	2.5	C-mount
★ Basler Lens C12T-1-80-VI	1.2" (19.3 mm)	1x	80	25	2.74	C-mount
★ Basler Lens C12T-1-80-VI-C	1.2" (19.3 mm)	1x	80	25	2.74	C-mount
★ Basler Lens C12T-2-63-VI	1.2" (19.3 mm)	2x	63	25	2.74	C-mount
★ Basler Lens C12T-2-63-VI-C	1.2" (19.3 mm)	2x	63	25	2.74	C-mount
★ Basler Lens C12T-4-63-VI	1.2" (19.3 mm)	4x	60	25	2.74	C-mount
★ Basler Lens C12T-4-63-VI-C	1.2" (19.3 mm)	4x	60	25	2.74	C-mount

Basler Lens	Maximum Image Circle	Resolution [MP]	Pixel Pitch [μm]	Focal Length [mm]	Mount	Maximum Relative Aperture
Basler Premium Lenses						
Basler Lens C125-0418-5M-P	1/2.5" (7.3 mm)	5	2.2	4	C-mount	1:1.8
Basler Lens C125-0618-5M-P	1/2.5" (7.3 mm)	5	2.2	6	C-mount	1:1.8
Basler Lens C125-0818-5M-P	1/2.5" (7.3 mm)	5	2.2	8	C-mount	1:1.8
Basler Lens C125-1218-5M-P	1/2.5" (7.3 mm)	5	2.2	12	C-mount	1:1.8
Basler Lens C125-1620-5M-P	1/2.5" (7.3 mm)	5	2.2	16	C-mount	1:2.0
Basler Lens C125-2522-5M-P	1/2.5" (7.3 mm)	5	2.2	25	C-mount	1:2.2
Basler Lens C23-0824-5M-P	2/3" (11 mm)	5	3.4	8	C-mount	1:2.4
Basler Lens C23-1224-5M-P	2/3" (11 mm)	5	3.4	12	C-mount	1:2.4
Basler Lens C23-1620-5M-P	2/3" (11 mm)	5	3.4	16	C-mount	1:2.0
Basler Lens C23-2518-5M-P	2/3" (11 mm)	5	3.4	25	C-mount	1:1.8
Basler Lens C23-3520-5M-P	2/3" (11 mm)	5	3.4	35	C-mount	1:2.0
Basler Lens C23-5028-5M-P	2/3" (11 mm)	5	3.4	50	C-mount	1:2.8
Basler Lens C23-0828-16M	2/3" (11 mm)	16	2	8	C-mount	1:2.8
Basler Lens C23-1228-16M	2/3" (11 mm)	16	2	12	C-mount	1:2.8
Basler Lens C23-1628-16M	2/3" (11 mm)	16	2	16	C-mount	1:2.8
Basler Lens C23-2528-16M	2/3" (11 mm)	16	2	25	C-mount	1:2.8
Basler Lens C23-3528-16M	2/3" (11 mm)	16	2	35	C-mount	1:2.8
Basler Lens C23-5028-16M	2/3" (11 mm)	16	2	50	C-mount	1:2.8
Basler Lens C23-7538-16M	2/3" (11 mm)	16	2	75	C-mount	1:3.8
Basler Lens C11-0824-12M-P	1.1" (17.5 mm)	12	3.5	8.5	C-mount	1:2.4
Basler Lens C11-1220-12M-P	1.1" (17.5 mm)	12	3.5	12	C-mount	1:2.0
Basler Lens C11-1620-12M-P	1.1" (17.5 mm)	12	3.5	16	C-mount	1:2.0
Basler Lens C11-2520-12M-P	1.1" (17.5 mm)	12	3.5	25	C-mount	1:2.0
Basler Lens C11-3520-12M-P	1.1" (17.5 mm)	12	3.5	35	C-mount	1:2.0
Basler Lens C11-5020-12M-P	1.1" (17.5 mm)	12	3.5	50	C-mount	1:2.0
Basler Lens C12-1224-25M	1.2" (19.3 mm)	25	2.71	12	C-mount	1:2.4
Basler Lens C12-1624-25M	1.2" (19.3 mm)	25	2.71	16	C-mount	1:2.4
Basler Lens C12-2524-25M	1.2" (19.3 mm)	25	2.71	25	C-mount	1:2.4
Basler Lens C12-3524-25M	1.2" (19.3 mm)	25	2.71	35	C-mount	1:2.4
Basler Lens C12-5024-25M	1.2" (19.3 mm)	25	2.71	50	C-mount	1:2.4
Basler Standard Lenses						
Basler Lens C23-0816-2M-S	2/3" (11 mm)	2	5.5	8.6	C-mount	1:1.6
Basler Lens C23-1216-2M-S	2/3" (11 mm)	2	5.5	12	C-mount	1:1.6
Basler Lens C23-1616-2M-S	2/3" (11 mm)	2	5.5	16	C-mount	1:1.6
Basler Lens C23-2518-2M-S	2/3" (11 mm)	2	5.5	25	C-mount	1:1.8
Basler Lens C23-3520-2M-S	2/3" (11 mm)	2	5.5	35	C-mount	1:2.0
Basler Lens C23-5026-2M-S	2/3" (11 mm)	2	5.5	50	C-mount	1:2.6
Basler Lens F-S35-3528-45M-S-SD	Super 35 (32 mm)	45	3.2	35	F-mount	1:2.8
Basler Lens F-S35-5028-45M-S-SD	Super 35 (32 mm)	45	3.2	50	F-mount	1:2.8
Basler Lens F-S35-7528-45M-S-SD	Super 35 (32 mm)	45	3.2	75	F-mount	1:2.8

Lighting

For ideal lighting conditions in your vision application

The type of lighting in your image processing system is crucial for image acquisition quality and can greatly simplify subsequent image evaluation. Reliability, long-term availability, and a good price/performance ratio are important criteria to consider when choosing the appropriate lighting for your application.



Quality

Product qualification processes for industrial quality components



Full-range supplier

Well thought-out portfolio of lighting products, perfect match for all cameras



Simple integration

Thanks to modular design, plug-and-play setup with easy mechanical integration



Long-term availability

For long-term integration into your system

More information: baslerweb.com/lighting



Lighting Control Made Easy

Basler SLP Feature

The SLP feature provides easy lighting control directly from the camera. It ensures smooth communication between Basler's SLP Controller and Basler boost R, ace 2, and the ace U and L cameras. There are different light modes (such as continuous light, strobing, or overdrive) that can be executed with the SLP feature.



- Simplest lighting control, directly from the camera
- Smooth operation through pylon software
- Easy one-click access to strobe and overdrive modes
- Plug-and-play setup and easy mechanical integration



LED Lighting

Low integration effort and low costs

Ensure consistent image quality in your application with our carefully considered portfolio. By choosing the right lighting early, you can save both time and money.

Basler Lights – Premium

Want to achieve fast, error-free integration? The Premium product line combines unique lighting control and effortless integration.

- Innovative lighting control directly from the camera with the SLP feature
- Easy Integration and smooth operation with a single software - Basler's pylon Software
- Easy one-click access to strobe and overdrive modes



Basler Lights – Premium

	Ring Light	Bar Light	Back Light	Flood Light
LED color (peak wavelength; typical)	White (5500K), Red (630 nm), Blue (470 nm)	White (5500K), Red (630 nm), Blue (470 nm)	White (6000K), Red (635 nm), Blue (470 nm)	White (5500K), Red (625 nm), Blue (465 nm)
Dimensions [mm]	50, 70, 90 - OD	113 × 20 × 20 163 × 20 × 20 213 × 20 × 20	63 × 90 × 15 123 × 154 × 15	278 × 51 × 49
Input voltage	24 VDC (+/-10%)			
Power consumption	3.1 – 4.7 W 5.8 – 7.8 W 11 – 13 W	3.1 – 5.2 W 4.6 – 7.8 W 6.1 – 11 W	6.1 W 15 W	14 W
Lighting modes	Continuous; Strobe incl. overdrive mode			
Pulse width	50 µs – 100 µs			
Pulse step size	10 µs			
Conformity	Lighting: CE, RoHS, IEC 62471 Compliant Product Controller: CE: EN61000-6-2, EN61000-6-4			

Basler Lights – Standard

Looking for cost-effective, easy-to-use lighting? In this product line, flexible operation meets industrial-grade durability.

- Offering direct control of continuous versus triggered light and the option to operate with an external lighting controller
- Increased service life due to modern thermal management
- Made in Germany & Protection class IP54



Basler Lights – Standard

	Back Light	Bar Light	Flatdome Light	Dome Light	Wide Bar Light	High Power Wide Bar Light
LED color (peak wavelength; typical)	White (5000K), Red (625 nm), Blue (465 nm), IR (850 nm)					
Degree of protection	IP54					
Dimensions [mm]	100 × 120 × 12 120 × 150 × 12 120 × 250 × 12 220 × 250 × 12 220 × 350 × 12	18 × 110 × 20 18 × 175 × 20 18 × 210 × 20 18 × 310 × 20 18 × 410 × 20 18 × 510 × 20	90 × 130 × 12 140 × 130 × 12 140 × 230 × 12 240 × 230 × 12 240 × 330 × 12	100 × 100 × 52 150 × 150 × 80 250 × 250 × 129 350 × 350 × 179	54 × 110 × 23 54 × 215 × 23 54 × 310 × 23	54 × 110 × 23 54 × 215 × 23 54 × 310 × 23
Input voltage	24 VDC (+/- 5 %)					
Power consumption (voltage- / current controlled)	6-28 W / 300-1500 mA	3-14 W / 150-900 mA	6-28 W / 300-1500 mA	6-22 W / 300-1500 mA	8-24 W / 450-1800 mA	11-32 W / 120-2000 mA
Lighting modes	Current controlled (when used with external light controller) / Voltage controlled (24V steady light and triggered light)					
Pulse width	100 µs – ∞ ms					
Conformity	RoHS, CE, UKCA, FCC, KC					

Basler Lights – Standard

	Ring Light	High Power Ring Light	Darkfield Light	Spot Light	Coaxial Light
LED color (peak wavelength; typical)	White (5000K), Red (625 nm), Blue (465 nm), IR (850 nm)				
Degree of protection	IP54				
Dimensions [mm]	80 × 92 × 12 130 × 141 × 12	130 × 141 × 12	130 × 141 × 12	56 × 46 × 46	150 × 150 × 150 250 × 250 × 250
Input voltage	24 VDC (+/- 5 %)				
Power consumption (voltage- / current controlled)	6-11 W / 300-900 mA	11 W / 600-900 mA	6 W / 300-450 mA	8 W / 600 mA	11-22 W / 600-1500 mA
Lighting modes	Current controlled (when used with external light controller) / Voltage controlled (24V steady light and triggered light)				
Pulse width	100 µs – ∞ ms				
Conformity	RoHS, CE, UKCA, FCC, KC				

Lighting Controller

Lighting control for maximum flexibility

The Basler SLP Controller allows lighting to be easily integrated and configured using pylon. For cost-effective lighting control, use our standard 2C and 4C multi-channel controllers.

Basler SLP Controller

The Basler SLP feature enables direct communication between the Basler SLP Controller and almost all Basler cameras. This allows you to easily integrate any light source into your machine vision application.



Basler SLP Controller – Premium

Basler SLP Strobe Controller 121040

Lighting modes	Continuous; Strobe incl. overdrive mode
Output current Continuous	0.05A – 2A
Output current overdrive mode	10A @200 μ s pulse width
Output voltage range	1.5V – 40V
Pulse width	50 μ s – 100 ms
Pulse step size	10 μ s
Max. frequency	200 Hz
Housing Size [L x W x H]	89 mm x 60 mm x 43,5 mm
Conformity	RoHS; CE; FCC; KC

We maintain a worldwide network of subsidiaries, offices and distributors to ensure that Basler customers always have a knowledgeable contact person in their area.

Europe, Middle East, Africa

1. **Basler AG Headquarters
Germany, Ahrensburg**
Tel. +49 4102 463 500
sales.europe@baslerweb.com
2. **Basler France SA**
Tel. +33 557 26 68 96
sales.france@baslerweb.com
3. **Basler Italy s.r.l.**
Tel. +39 02 4455 154
paolo.rutigliano@baslerweb.com
4. **Basler Office Benelux
Cor Valk**
Tel. +31 6 83 99 20 56
cor.valk@baslerweb.com
5. **Basler Office UK & IRL
Mark Williams**
Tel. +44 7868 844 808
mark.williams@baslerweb.com
6. **Basler Office RU, BY & UA
Victor Egorov**
Tel. +7 916 813 39 83
victor.egorov@baslerweb.com
7. **Basler Office PL, CZ, SK, Baltics & Balkans
Michal Wasilewski**
Tel. +48 504 990 494
michal.wasilewski@baslerweb.com

North, Middle, South America

8. **Basler, Inc. USA
Exton (Subsidiary)**
Tel. +1 610 280 0171
sales.usa@baslerweb.com

Asia-Pacific

sales.asia@baslerweb.com

- | | |
|---|---|
| <ol style="list-style-type: none"> 9. Basler Asia Pte Ltd.
Singapore (Subsidiary)
Tel. +65 6367 1355 10. Basler Vision Technologies Taiwan Inc. (Subsidiary)
Tel. +886 3558 3955 11. Basler Vision Technology (Beijing) Co., Ltd. (Subsidiary)
Tel. +86 10 6295 2828 12. Basler Vision Technology (Beijing) Co., Ltd. Shanghai Office
Tel. +86 21 6163 3892/3 13. Basler Vision Technology (Beijing) Co., Ltd. Shenzhen Office
Tel. +86 755 8282 4786 14. Basler Vision Technology (Beijing) Co., Ltd. Suzhou Office
Tel. +86 512 6282 4458 | <ol style="list-style-type: none"> 15. Basler Vision Technology (Beijing) Co., Ltd. Xi'an Office
Tel. +86 29 8177 2726/9 16. Basler Vision Technology (Beijing) Co., Ltd. Chengdu Office
Tel. +86 28 8526 0538 17. Basler, Inc. Korea Anyang office
Tel. +82 31 714 3114 18. Basler Japan KK Tokyo (Subsidiary)
Tel. +81 3 6432 4080 19. Alpha Techsys Automation India Pvt Ltd. (Subsidiary)
Tel. +91 7620 0830 94 |
|---|---|





